


Jacuzzi®



Dimension and Specification Handbook

Important Safety Instructions-All Models

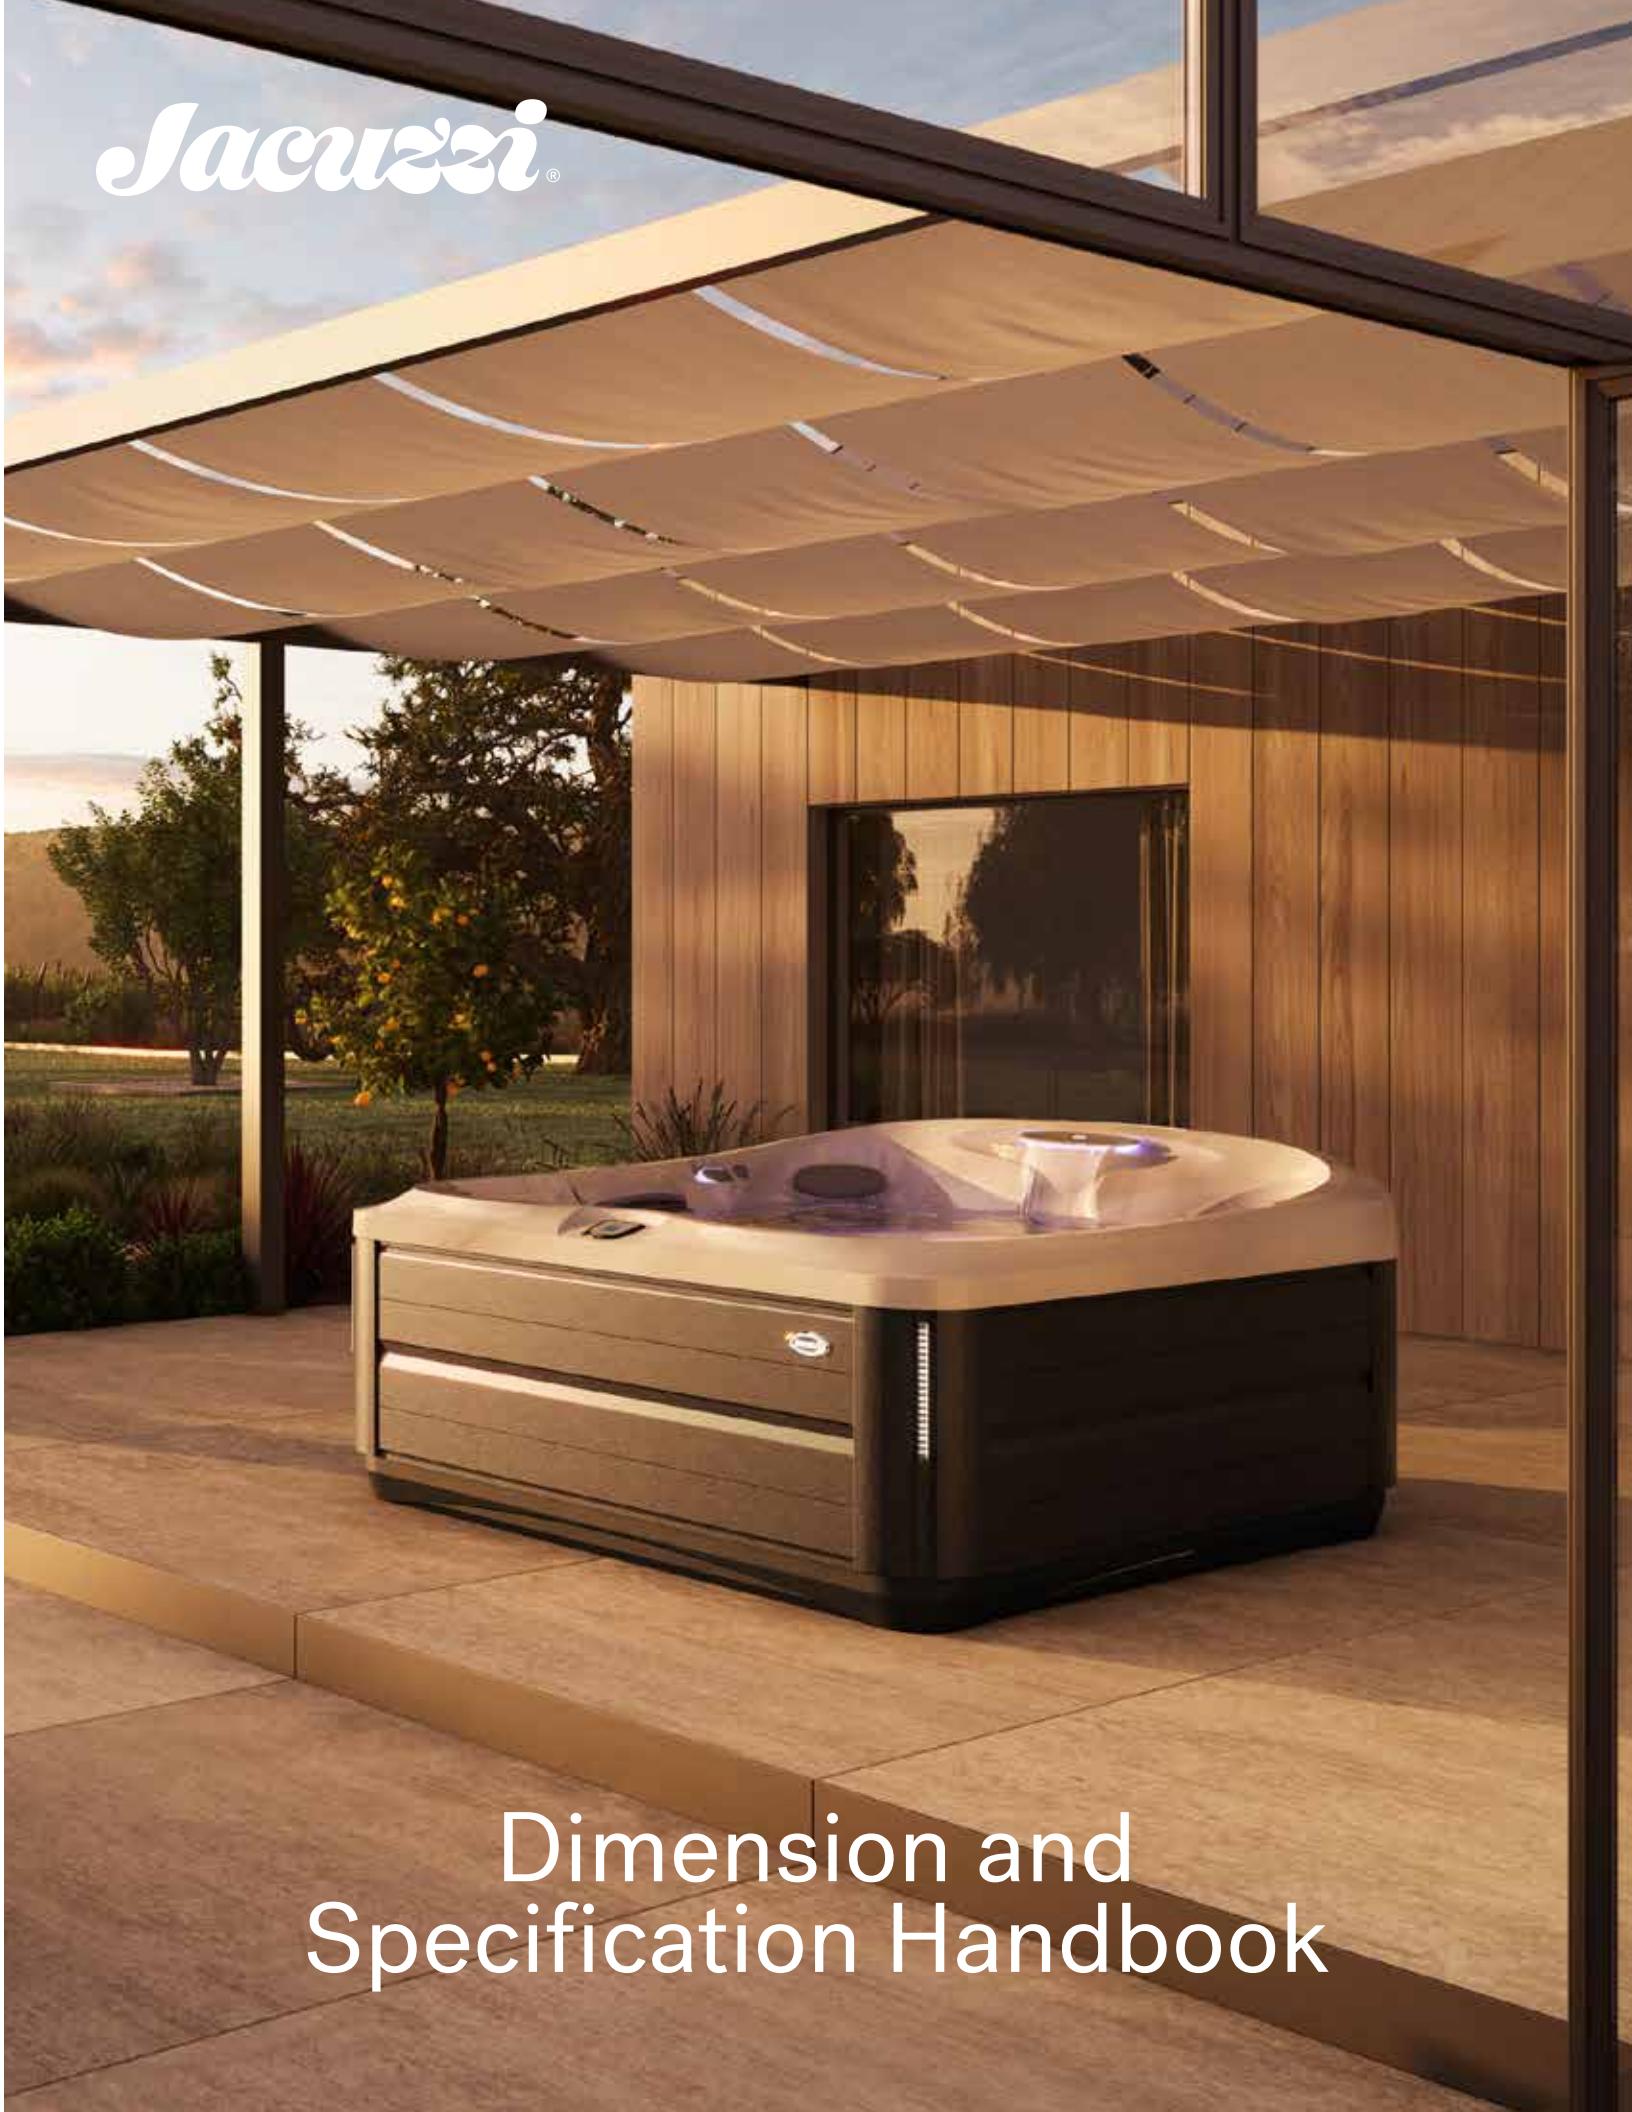

© 2024 Jacuzzi Hot Tubs. Jacuzzi may make product modifications and enhancements. Therefore, specifications may change without notice. Dimensions are approximate and for reference only.



CAUTION: ALWAYS MEASURE EACH SPA FOR EXACT DIMENSIONS BEFORE DESIGNING ITS FOUNDATIONAL SUPPORT AND/OR DECKING.



When designing a foundational support, always account for the following load factors:

1. Filled spa weight, plus (+)
2. Combined occupant weight at the maximum seating capacity, plus (+)
3. Weight of the support decking, when applicable.



The technical data given in this publication is for reference only. It implies no warranty of kind.



Dimensions/Specifications subject to change without notice. Spa operation subject to change without notice.

Table of Contents

Jacuzzi J-400™ Collection Hot Tubs	7
J-495™ Specifications	7
J-495 Operations	8
J-495 Dimensions.....	9
J-485™ Specifications	10
J-485 Operations	11
J-485 dimensions	12
J-475™ Specifications	13
J-475 Operations	14
J-475 Dimensions.....	15
J-445™ Specifications	16
J-445 Operations	17
J-445 Dimensions.....	18
J-435™ Specifications	19
J-435 Operations	20
J-435 Dimensions.....	21
Jacuzzi J-LX® Collection Hot Tubs	22
J-LXL® Specifications	22
J-LXL Operations	23
J-LXL Dimensions	24
J-LX® Specifications.....	25
J-LX Operations.....	26
J-LX Dimensions	27
Jacuzzi J-300™ Collection Hot Tubs	28
J-385™ Specifications	28
J-385 Operations	29
J-385 Dimensions.....	30
J-375™ Specifications	31
J-375 Operations	32
J-375 Dimensions.....	33

Table of Contents

J-365™ Specifications	34
J-365 Operations	35
J-365 Dimensions.....	36
J-355™ Specifications	37
J-355 Operations	38
J-355 Dimensions.....	39
J-345™ Specifications	40
J-345 Operations	41
J-345 Dimensions.....	42
J-335™ Specifications	43
J-335 Operations	44
J-335 Dimensions.....	45
J-325™ Specifications	46
J-325 Operations	47
J-325 Dimensions.....	48
J-315™ Specifications	49
J-315 Operations	50
J-315 Dimensions.....	51
Jacuzzi J-200™ Collection Hot Tubs	52
J-285™ Specifications	52
J-285 Operations	53
J-285 Dimensions.....	54
J-275™ Specifications	55
J-275 Operations	56
J-275 Dimensions.....	57
J-245™ Specifications	58
J-245 Operations	59
J-245 Dimensions.....	60


Table of Contents

J-235™ Specifications	61
J-235 Operations	62
J-235 Dimensions.....	63
J-225™ Specifications	64
J-225 Operations	65
J-225 Dimensions.....	66
J-215™ Specifications	67
J-215 Operations	68
J-215 Dimensions.....	69
Play™ Collection	70
Soul™ 30 Jets Square Lounge Specifications	70
Soul 30 Jets Square Lounge Operation/Seat Depths	71
Soul 30 Jets Square Lounge Portable Dimensions	72
Echo™ 30 Jets Square Specifications	73
Echo 30 Jets Square Operation/Seat Depths	74
Echo 30 Jets Square Portable Dimensions	75
Mood™ 20 Jets Rectangle Specifications.....	76
Mood 20 Jets Rectangle Operation/Seat Depths.....	77
Mood 20 Jets Rectangle Portable Dimensions.....	78
Complete Dimensions -J 400™ Collection Models	79
Complete Dimensions - JLX™ Collection Models.....	80
Complete Dimensions - J300™ Collection Models	81
Complete Dimensions - J200™ Collection Models	82

Jacuzzi J-495


Specifications

Seating Capacity	8-9 Adults
Dimensions	91" x 110" x 37.5" Front/43.5" Back, (231.1 cm x 279.4 cm x 95.25 cm Front/110.5 cm Back); For complete dimensions, See page 79
Dry Weight	1,091 lbs (495 kg)
Filled Weight (Spa Volume)	6,679 lbs (3,030 kg)
Filled Weight (Average Fill)	5,261 lbs (2,386 kg)
Water Capacity (Spa Volume)	670 US gallons (2,536 Liters)
Water Capacity (Average Fill)	500 US gallons (1,893 Liters)
Electronic Controls	ProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting.
Pump 1	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous
Pump 2	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous
Pump 3	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous
Circulation Pump	Yes, 8-Hour
Total PowerPro® Jets	69 (plus 2 IR Therapy Lights)
Seat A Jets	2 PowerPro® NX2, 2 PowerPro® FX, 5 PowerPro® RX
Seat B Jets	1 PowerPro® FX Large Rotational
Seat C Jets	2 PowerPro® NX2, 6 PowerPro® RX, 2 PowerPro® FX Directional, 2 PowerPro® PX, 4 PowerPro® FX
Seat D Jets	2 PowerPro® FX Large Rotational
Seat E Jets	2 PowerPro® NX2, 4 PowerPro® FX Rotational, 4 PowerPro® FX, 2 IR Therapy Lights, 2 PowerPro® PX, 2 PowerPro® FX Directional
Seat F Jets	4 PowerPro® FX, 4 PowerPro® RX
Seat G Jet	2 PowerPro® NX2, 3 PowerPro® MX
Footwell (H)	14 PowerPro® FX Small
Massage Selectors	2
Air Controls	5
Water Management System	One ProClarity® 40 ft ² filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft ² filter; Floating Weir; Factory installed True™ Water System (Must order with SmartTub® option) Export (50 Hz): ClearRay Active Oxygen® System
LED Lighting	Waterfall light, massage selectors, cupholders, underwater, indicator light, and exterior lights (standard)
ProFinish™ Cabinet Colors	Modern Hardwood, Brushed Gray, and Smoked Ebony
Acrylic Colors	Platinum, Silver Pearl, Midnight, Monaco, Porcelain (while quantities last)
Headrests	4
Waterfalls	Two with independent flow rate (on or off) adjustment; powered by 8-hour circulation pump
Heater:	North America (60 Hz): 5.5 kW, High Flow Export (50 Hz): High Flow, 2.7 kW
Electrical Requirements:	North America (60 Hz): 240 VAC@50A or 60A Export (50 Hz): 220-240 VAC@ 1x32A, 1x40A, 1x32A/1x16A, 3x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.
Warranty*	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year True™ Water System, 1 Year Stereo; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo
Special Features (Optional)	SmartTub® Module (Must order with the True Water System)
Audio System (Optional)	BLUEWAVE® Spa Stereo System with Bluetooth capability and Aux 3.5 mm headphone jack port; 4 premium speakers, a powered subwoofer

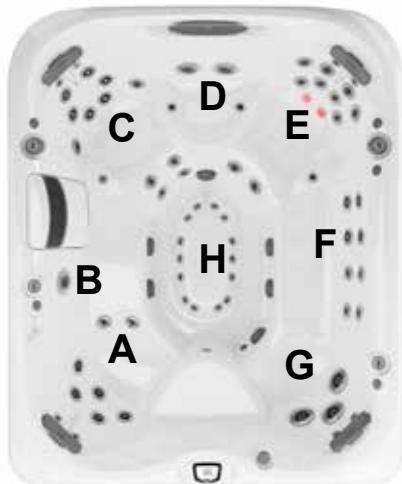

Jacuzzi J-495

Operation/Seat Depths

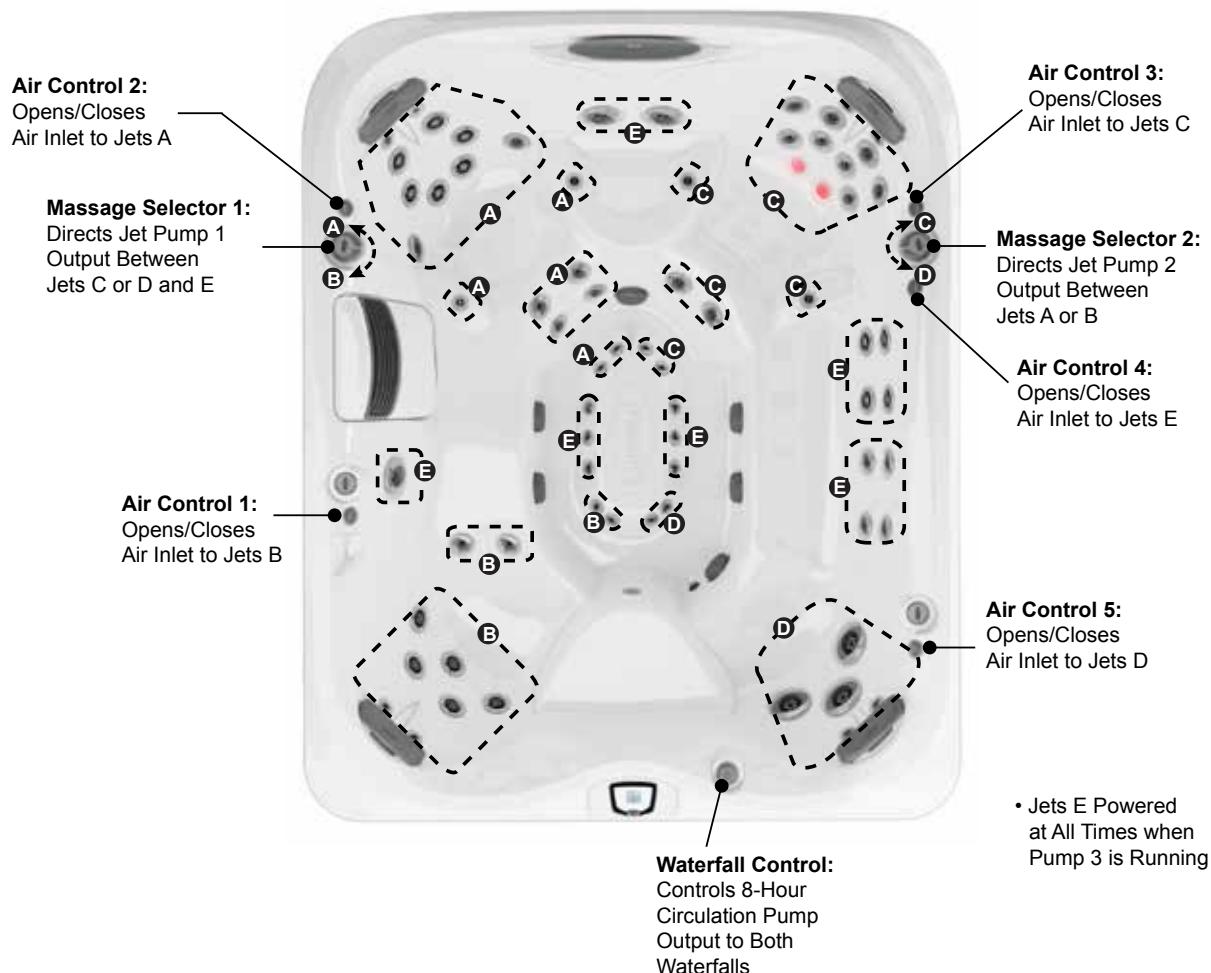

69 Total Jets (plus 2 IR Therapy Lights)





Spa Operation Subject to Change without Notice

Seat Depths

A = 27.75" (70.49 cm)
B = 18.75" (47.63 cm)
C = 29.00" (73.66 cm)
D = 19.00" (73.03 cm)
E = 27.00" (68.58 cm)
F = 23.00" (58.42 cm)

G = 25.50" (64.77 cm)
H = 17.75" (45.09 cm)
I = 30.75" (78.11 cm)
J = 33.00" (83.82 cm)

Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5"** (1.27 cm).

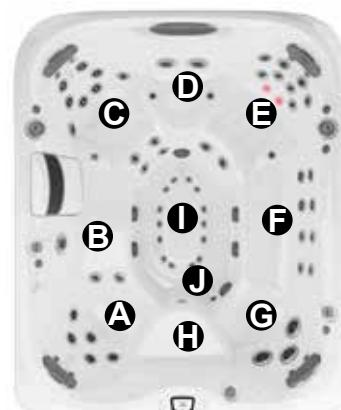


Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-495

Dimensions


TOP VIEW

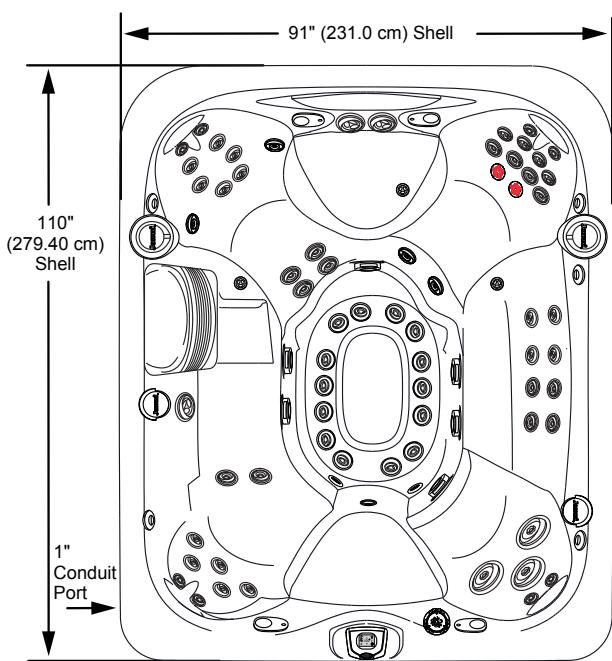

Equipment Bay/Pump Access
True™ Water Care System, Optional BLUEWAVE®,
and SmartTub System
located behind the cabinet


FRONT VIEW

Tolerance: $\pm 0.5"$ (1.27 cm)

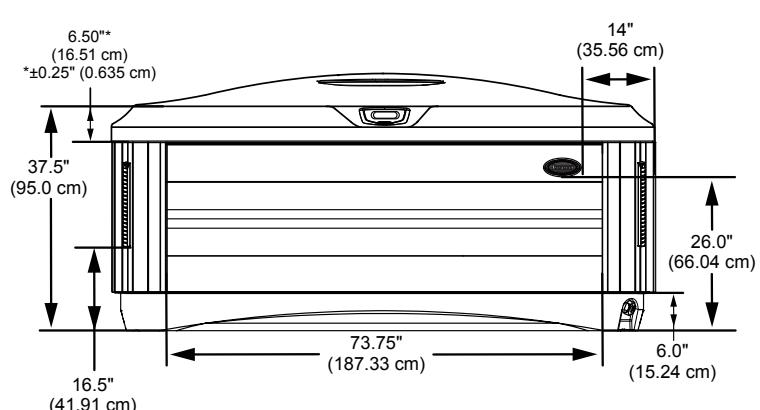


RIGHT SIDE VIEW

Tolerance: $\pm 0.5"$ (1.27 cm)

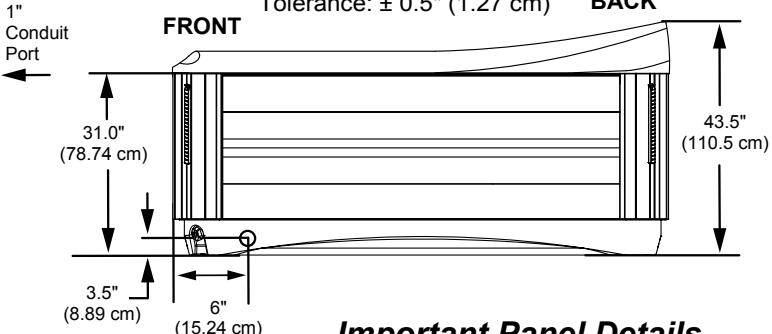

Important Panel Details

NOTE: Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

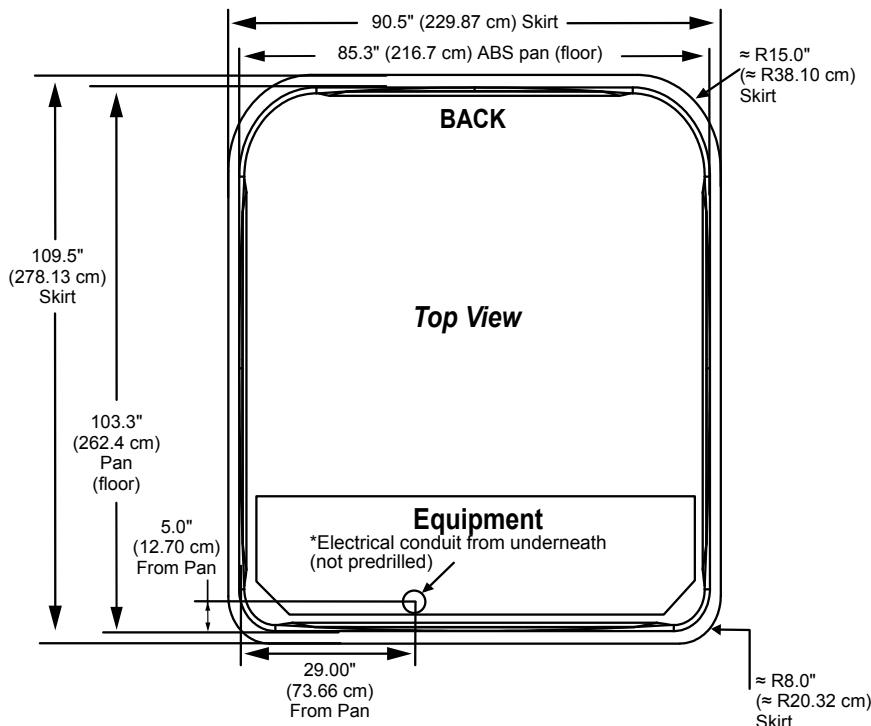

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.



Dimensions/specifications subject to change without notice. Tolerance $\pm 0.5"$ (1.27 cm)

Jacuzzi J-485


Specifications

Seating Capacity	6-7 Adults
Dimensions	91" x 91" x 37.5" Front/43.5" Back, (231.14 cm x 231.14 cm x 95.25 cm Front/110.5 cm Back); For complete dimensions, See page 79
Dry Weight	916 lbs (415 kg)
Filled Weight (Average Fill)	4,544 lbs (2,061 kg)
Water Capacity (Average Fill)	435 US gallons (1,647 Liters)
Filled Weight (Spa Volume)	5,336 lbs (2,421 kg)
Water Capacity (Spa Volume)	530 US gallons (2,006 Liters)
Electronic Controls	ProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting.
Pump 1	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
Export (50 Hz):	1-Speed, 2.0 HP continuous
Pump 2	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
Export (50 Hz):	1-Speed, 2.0 HP continuous
Circulation Pump	Yes, 8-Hour
Total PowerPro® Jets	47 (plus 2 IR Therapy Lights)
Seat A Jets	2 PowerPro® NX2, 3 PowerPro® MX
Seat B Jets	2 PowerPro® NX2, 6 PowerPro® RX
Seat C Jets	2 PowerPro® FX Large
Seat D Jets	2 PowerPro® NX2, 4 PowerPro® FX Rotational, 4 PowerPro® FX, 2 IR Therapy Lights, 2 PowerPro® PX
Seat E Jets	2 PowerPro® RX, 2 PowerPro® FX
Seat F Jets	4 PowerPro® FX, 1 PowerPro® FX Large Rotational, 2 PowerPro® FX Rotational
Footwell (G)	8 PowerPro® FX Small, 1 PowerPro® FX Large
Massage Selectors	2
Air Controls	4, On/Off rocker switch air controller
Water Management System	One ProClarity® 40 ft ² filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft ² filter; Floating Weir; True™ Water System (Must order with SmartTub® option)
Export (50 Hz):	ClearRay Active Oxygen® System
LED Lighting	Waterfall light, massage selectors, cupholders, underwater, indicator light, and exterior lights (standard)
ProFinish™ Cabinet Colors	Modern Hardwood, Brushed Gray, and Smoked Ebony
Acrylic Colors	Platinum, Silver Pearl, Midnight, Monaco, Porcelain (while quantities last)
Headrests	4
Waterfall	One with independent flow rate (on or off) adjustment; powered by 8-hour circulation pump
Heater:	North America (60 Hz): 5.5 kW, High Flow
Export (50 Hz):	High Flow, 2.7 kW
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A, or 60A
	Export (50 Hz): 220-240 VAC@ 1x32A, 1x20A/1x16A, 3x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.
Warranty*	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year True™ Water System, 1 Year Stereo; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo
Special Features (Optional)	SmartTub® Module (Must order with the True™ Water System)
Audio System (Optional)	BLUEWAVE® Spa Stereo System with Bluetooth capability and Aux 3.5 mm headphone jack port; 4 premium speakers, a powered subwoofer




Jacuzzi J-485

Operation/Seat Depths

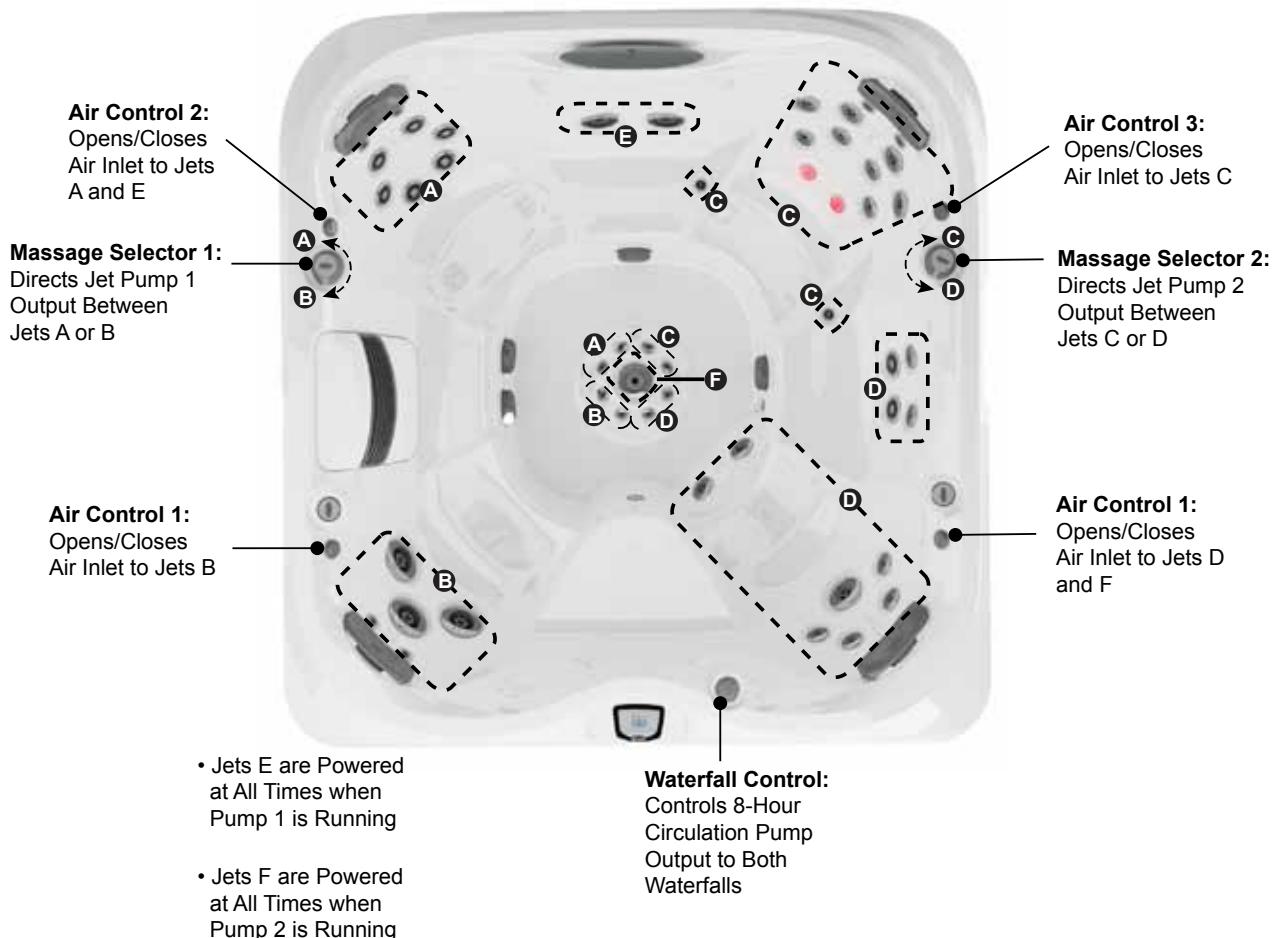

47 Total Jets (plus 2 IR Therapy Lights)

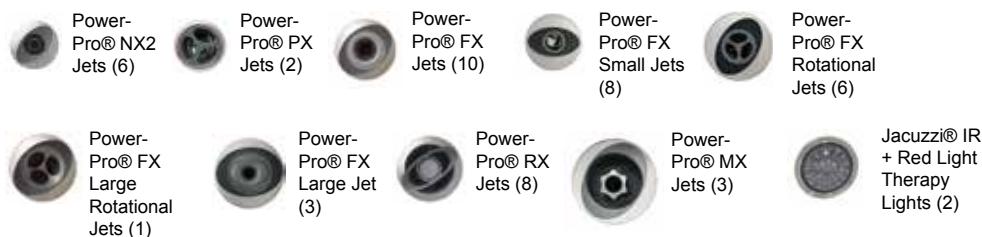


Spa Operation Subject to Change without Notice


Seat Depths

A = 25.25" (64.14 cm)
B = 23.00" (58.42 cm)
C = 29.50" (74.93 cm)
D = 23.25" (59.06 cm)
E = 29.25" (74.30 cm)
F = 21.00" (53.34 cm)

G = 27.38" (69.55 cm)
H = 17.25" (43.82 cm)
I = 32.50" (82.55 cm)



Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance $\pm 0.5"$ (1.27 cm).

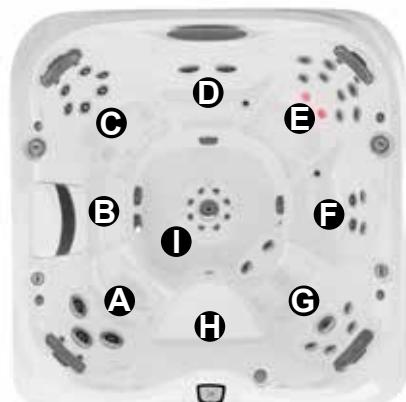


Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-485


Dimensions

TOP VIEW

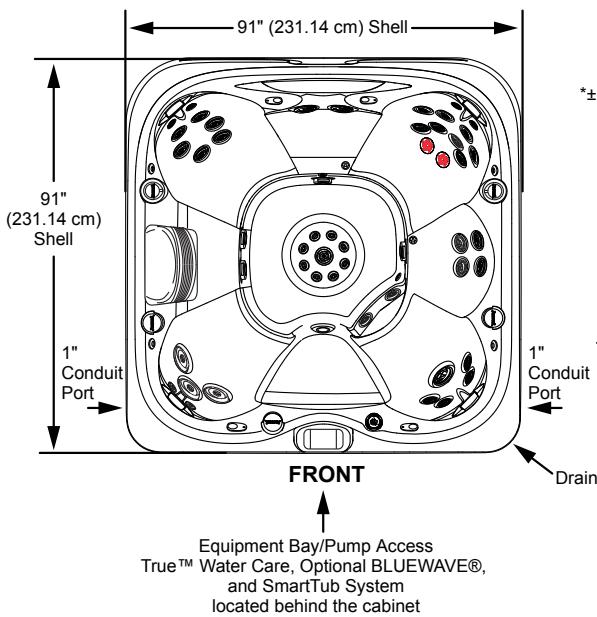

FRONT VIEW


Tolerance: $\pm 0.5"$ (1.27 cm)

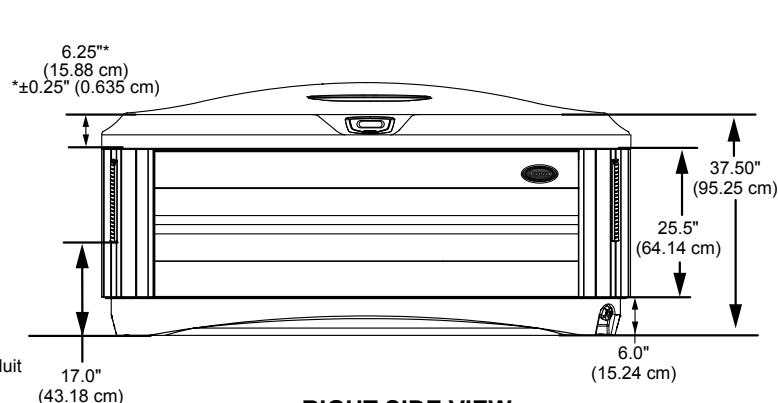

RIGHT SIDE VIEW

Tolerance: $\pm 0.5"$ (1.27 cm)

FRONT BACK

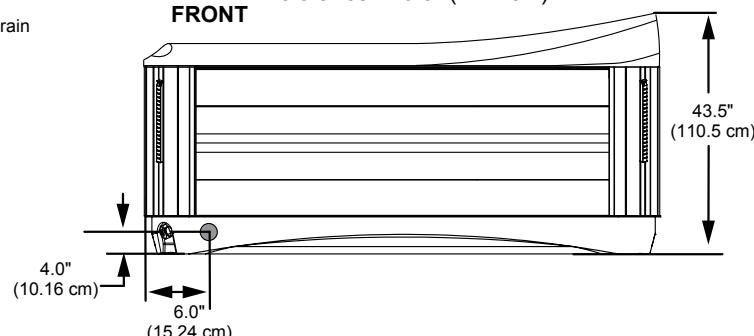


Important Panel Details

NOTE: Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.



***IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

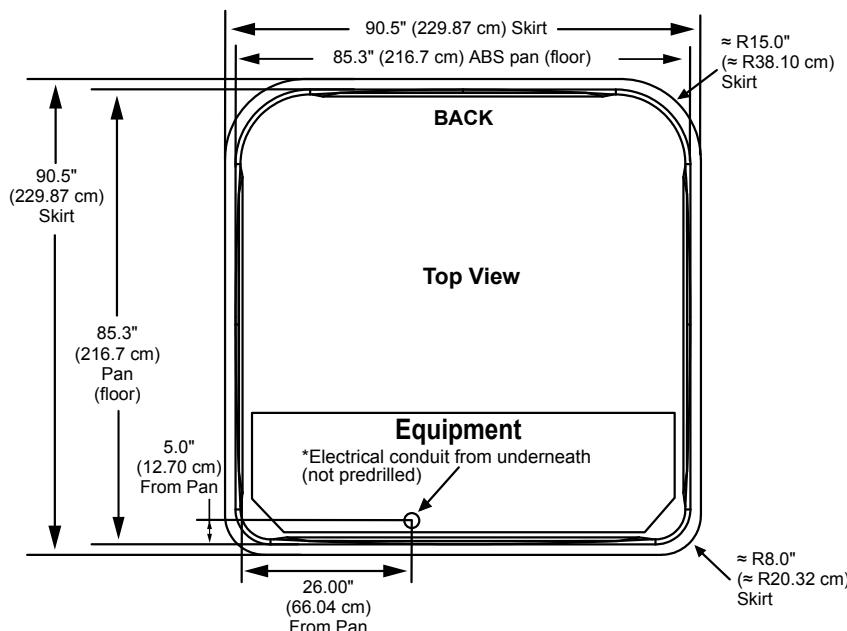

Dimensions/specifications subject to change without notice. Tolerance $\pm 0.5"$ (1.27 cm)

Jacuzzi J-475

Specifications

Seating Capacity 6-7 Adults
Dimensions 91" x 91" x 37.5" Front/43.5" Back, (231.14 cm x 231.14 cm x 95.25 cm Front/110.5 cm Back); For Complete Dimensions, See page 79
Dry Weight 925 lbs (419.5 kg)
Filled Weight (Average Fill) 4,595 lbs (2,084 kg)
Water Capacity (Average Fill) 440 US gallons (1,666 Liters)
Filled Weight (Spa Volume) 5,387 lbs (2,444 kg)
Water Capacity (Spa Volume) 535 US gallons (2,025 Liters)
Electronic Controls ProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtra- tion cycles, heating modes and water temperature setting.
Pump 1 North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
Export (50 Hz): 1-Speed, 2.0 HP continuous
Pump 2 North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
Export (50 Hz): 1-Speed, 2.0 HP continuous
Circulation Pump Yes, 8-Hour
Total PowerPro® Jets 53 (plus 2 IR Therapy Lights)
Seat A Jets 2 PowerPro® NX2, 3 PowerPro® MX, 2 PowerPro® FX Rotational
Seat B Jets 2 PowerPro® NX2, 6 PowerPro® FX Rotational, 4 PowerPro® FX, 2 IR Therapy Lights
Seat C Jets 2 PowerPro® FX Large
Seat D Jets 2 PowerPro® NX2, 6 PowerPro® RX, 8 PowerPro® PX, 2 PowerPro® FX Large
Seat E Jet 4 PowerPro® FX, 1 PowerPro® FX Large Rotational
Footwell (F) 8 PowerPro® FX Small, 1 PowerPro® FX Large
Massage Selectors 2
Air Controls 4, On/Off rocker switch air controller
Water Management System One ProClarity® 40 ft ² filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft ² filter; Floating Weir; True™ Water System (Must order with SmartTub® option)
Export (50 Hz): ClearRay Active Oxygen® System
LED Lighting Waterfall light, massage selectors, cupholders, underwater, indicator light, and exterior lights (standard)
ProFinish™ Cabinet Colors Modern Hardwood, Brushed Gray, and Smoked Ebony
Acrylic Colors Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
Headrests 4
Waterfall One with independent flow rate (on or off) adjustment; powered by 8-hour circulation pump
Heater: North America (60 Hz): 5.5 kW, High Flow
Export (50 Hz): High Flow, 2.7 kW
Electrical Requirements: North America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 220-240 VAC@ 1x32A, 1x20A/1x16A, 3x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.
Warranty* North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year True™ Water System, 1 Year Stereo; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo
Special Features (Optional) SmartTub® Module (Must order with the True™ Water System)
Audio System (Optional) BLUEWAVE® Spa Stereo System with Bluetooth capability and Aux 3.5 mm head- phone jack port; 4 premium speakers, a powered subwoofer


*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice




Jacuzzi J-475

Operation/Seat Depths

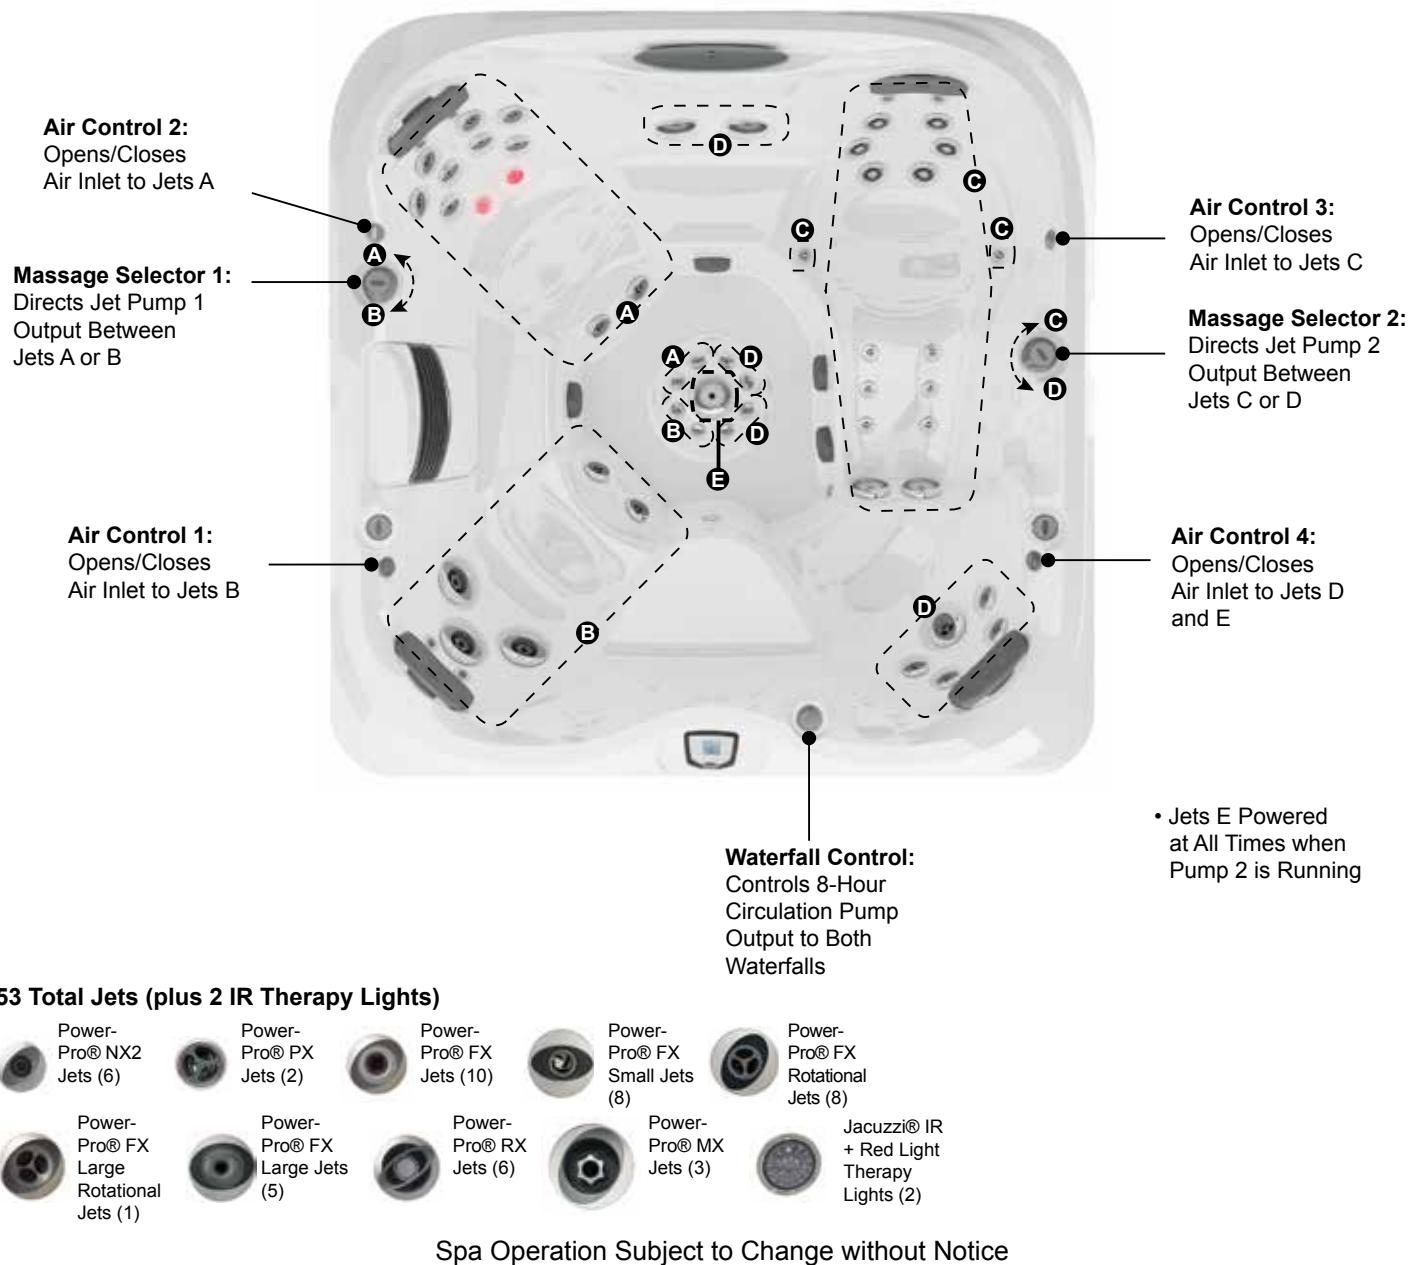

A = 25.25" (64.14 cm)
B = 23.00" (58.42 cm)
C = 29.50" (74.93 cm)
D = 23.25" (59.06 cm)
E = 29.25" (74.30 cm)
F = 25.25" (64.14 cm)

G = 17.25" (43.82 cm)
H = 32.50" (82.55 cm)
I = 19.75" (50.17 cm)
J = 28.50" (72.39 cm)




Listed dimensions represent distance from top of acrylic to lowest point in seat.
Tolerance ± 0.5" (1.27 cm).



Dimensions/Specifications are Subject to Change Without Notice


Jacuzzi J-475

Dimensions

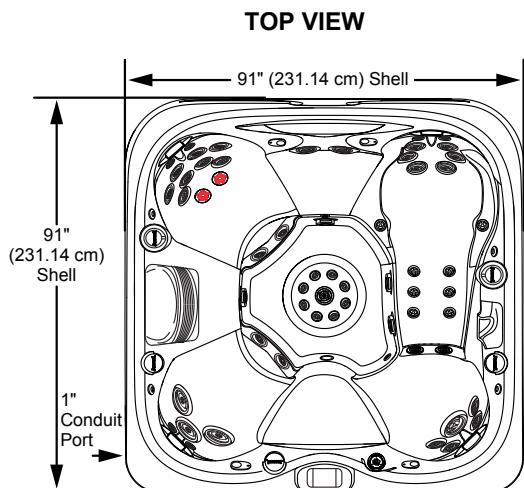

FRONT

Equipment Bay/Pump Access
True™ Water Care System,
Optional BLUEWAVE®,
and SmartTub System
located behind the cabinet

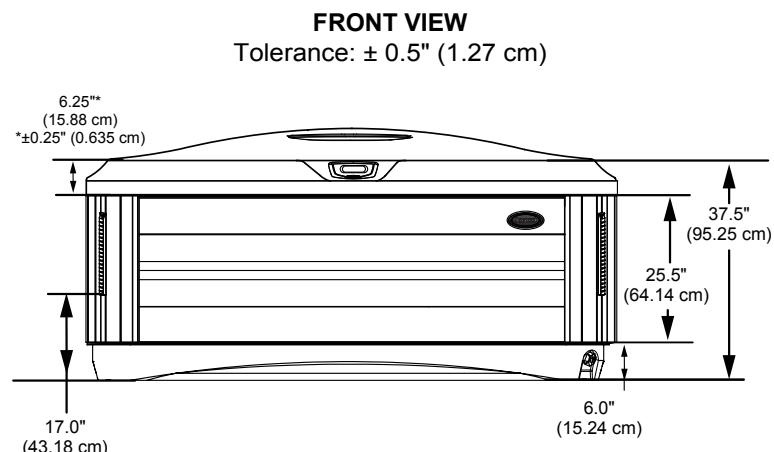

FRONT

RIGHT SIDE VIEW
Tolerance: $\pm 0.5"$ (1.27 cm)

BACK

43.5" (110.5 cm)

4.0" (10.16 cm)


6.0" (15.24 cm)

Important Panel Details

NOTE: Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.



***IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

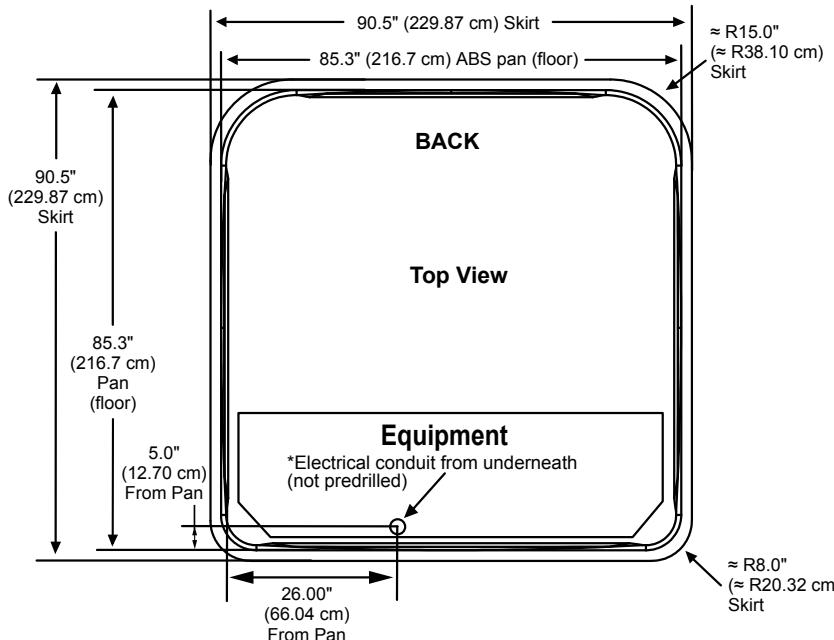

Dimensions/specifications subject to change without notice. Tolerance $\pm 0.5"$ (1.27 cm)

Jacuzzi J-445


Specifications

Seating Capacity	6 Adults
Dimensions	84" x 84" x 37.5" Front/43.5" Back, (213.5 cm x 213.5 cm x 95.25 cm Front/110.5 cm Back); For Complete Dimensions, See page 79
Dry Weight	855 lbs (388 kg)
Filled Weight (Average Fill)	4,024 lbs (1,825 kg)
Water Capacity (Average Fill)	380 US gallons (1,438 Liters)
Filled Weight (Spa Volume)	4,525 lbs (2,052 kg)
Water Capacity (Spa Volume)	440 US gallons (1,666 Liters)
Electronic Controls	ProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting.
Pump 1	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous
Pump 2	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous
Circulation Pump	Yes, 8-Hour
Total PowerPro® Jets	43 (plus 2 IR Therapy Lights)
Seat A Jets	2 PowerPro® NX2, 3 PowerPro® MX
Seat B Jets	2 PowerPro® RX
Seat C Jets	2 PowerPro® FX, 6 PowerPro® RX, 2 PowerPro® FX Rotational
Seat D Jets	1 PowerPro® FX Large Rotational
Seat E Jets	2 PowerPro® NX2, 4 PowerPro® FX Rotational, 4 PowerPro® FX, 2 IR Therapy Lights
Seat F Jets	4 PowerPro® FX, 1 PowerPro® FX Large Rotational, 2 PowerPro® FX Rotational
Footwell (G)	8 PowerPro® FX Small
Massage Selectors	2
Air Controls	4, On/Off rocker switch air controller
Water Management System	One ProClarity® 40 ft ² filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft ² filter; Floating Weir; True™ Water System (Must order with SmartTub® option)
Export (50 Hz):	ClearRay Active Oxygen® System
LED Lighting	One waterfall with light, one underwater light, cupholders, massage selector lights, indicator light, and exterior lights (standard)
ProFinish™ Cabinet Colors	Modern Hardwood, Brushed Gray, and Smoked Ebony
Acrylic Colors	Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
Headrests	4
Waterfall	One with Independent flow rate (on or off) adjustment; powered by 8-hour circulation pump
Heater:	North America (60 Hz): 5.5 kW, High Flow
Export (50 Hz):	High Flow, 2.7 kW
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 220-240 VAC@ 1x32A, 1x20A/1x16A, or 3x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.
Warranty*	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year True™ Clean Water System, 1 Year Stereo Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo
Special Features (Optional)	SmartTub® Module (Must order with the True™ Water System)
Audio System (Optional)	BLUEWAVE® Spa Stereo System with Bluetooth capability and Aux 3.5 mm headphone jack port; 4 premium speakers, a powered subwoofer



Jacuzzi J-445

Operation/Seat Depths

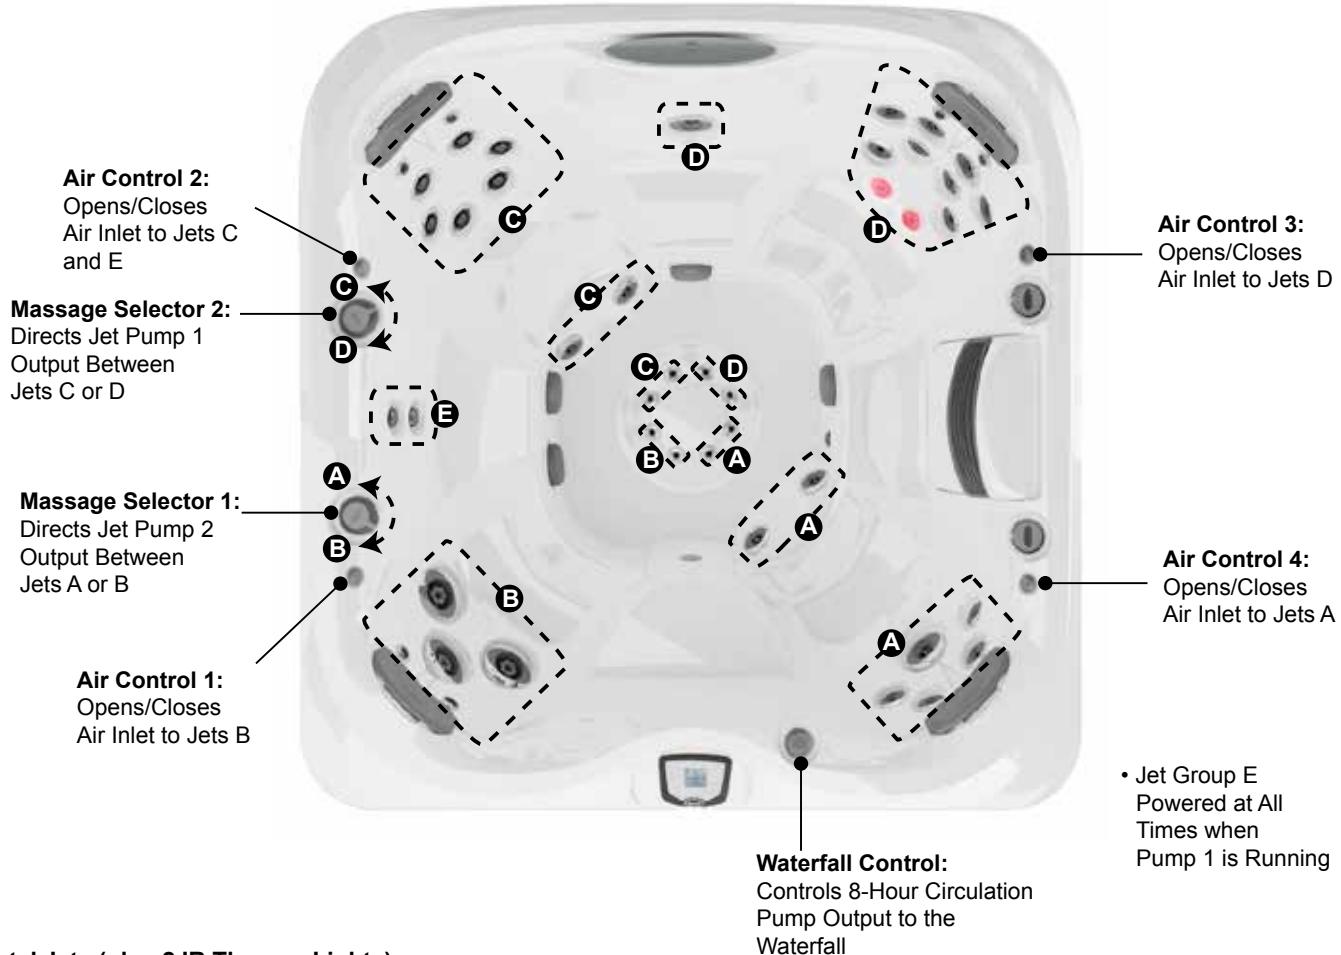

43 Total Jets (plus 2 IR Therapy Lights)




Spa Operation Subject to Change without Notice


Seat Depths

A = 25.50" (64.77 cm)
B = 21.00" (53.34 cm)
C = 30.00" (76.20 cm)
D = 23.00" (58.42 cm)
E = 29.00" (73.66 cm)
F = 23.00" (58.42 cm)

G = 25.50" (64.77 cm)
H = 18.00" (45.72 cm)
I = 34.00" (86.36 cm)





Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5"** (1.27 cm).

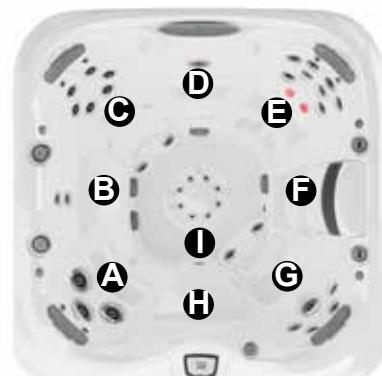

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-445

Dimensions

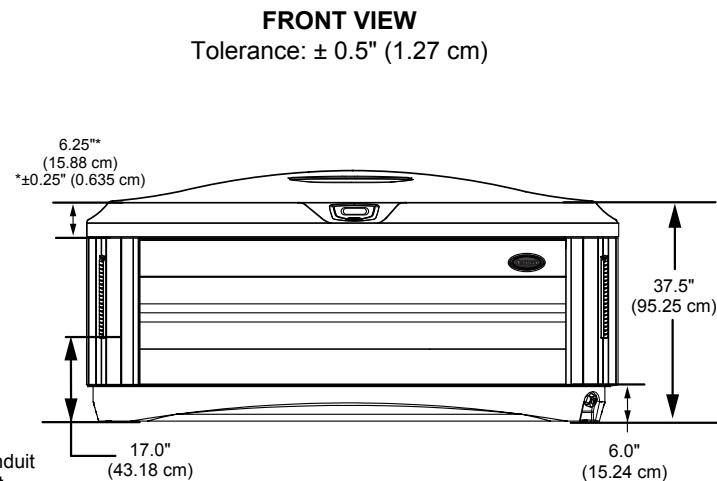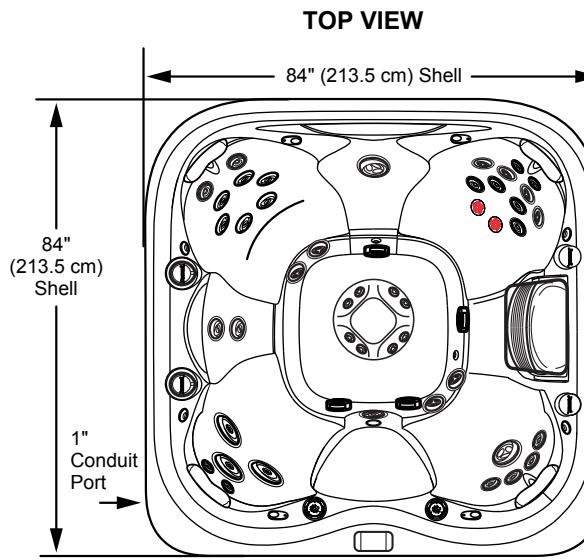


FRONT

Equipment Bay/Pump Access
True™ Water Care System,
Optional BLUEWAVE®,
and SmartTub System
located behind the cabinet

RIGHT SIDE VIEW

Tolerance: $\pm 0.5"$ (1.27 cm)

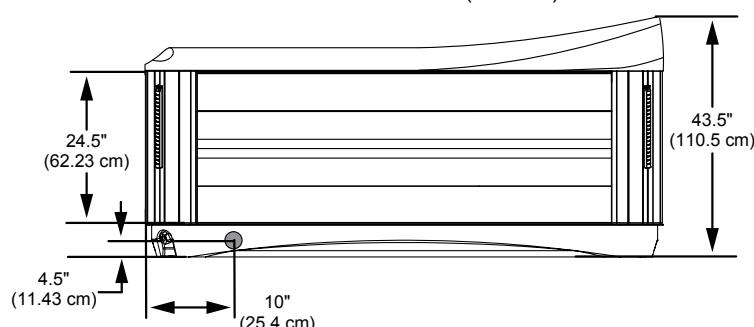


Important Panel Details

NOTE: Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.



***IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.**

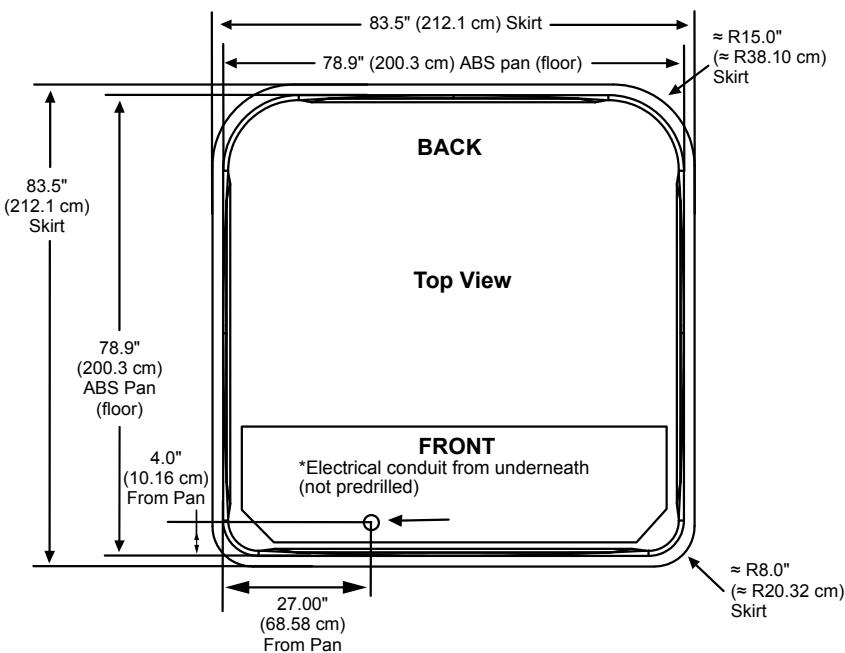

Dimensions/specifications subject to change without notice. Tolerance $\pm 0.5"$ (1.27 cm)

Jacuzzi J-435

Specifications

Seating Capacity	5-6 Adults
Dimensions	84" x 84" x 37.5" Front/43.5" Back, (213.5 cm x 213.5 cm x 95.25 cm Front/110.5 cm Back); For Complete Dimensions, See page 79
Dry Weight	822 lbs (373 kg)
Filled Weight (Average Fill)	3,824 lbs (1,735 kg)
Water Capacity (Average Fill)	360 US gallons (1,363 Liters)
Filled Weight (Spa Volume)	4,492 lbs (2,037 kg)
Water Capacity (Spa Volume)	440 US gallons (1,666 Liters)
Electronic Controls	ProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting.
Pump 1	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
Export (50 Hz):	1-Speed, 2.0 HP continuous
Pump 2	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
Export (50 Hz):	1-Speed, 2.0 HP continuous
Circulation Pump	Yes, 8-Hour
Total PowerPro® Jets	45 (plus 2 IR Therapy Lights)
Seat A Jets	3 PowerPro® FX
Seat B Jets	2 PowerPro® NX2, 6 PowerPro® RX, 2 PowerPro® PX, 6 PowerPro® FX Small, 2 PowerPro® FX Rotational
Seat C Jets	1 PowerPro® FX Large Rotational
Seat D Jets	2 PowerPro® NX2, 4 PowerPro® FX Rotational, 4 PowerPro® FX, 2 IR Therapy Lights
Seat E Jets	2 PowerPro® RX
Seat F Jets	2 PowerPro® NX2, 3 PowerPro® MX, 2 PowerPro® FX Rotational
Footwell (G)	4 PowerPro® FX Small
Massage Selectors	2
Air Controls	3, On/Off rocker switch air controller
Water Management System	One ProClarity® 40 ft ² filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft ² filter; Floating Weir; True™ Water System (Must order with SmartTub® option)
Export (50 Hz):	ClearRay Active Oxygen® System
LED Lighting	One waterfall with light, one underwater light, cupholder, massage selector lights, indicator light, and exterior lights (standard)
ProFinish™ Cabinet Colors	Modern Hardwood, Brushed Gray, and Smoked Ebony
Acrylic Colors	Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
Headrests	3
Waterfall	One with Independent flow rate (on or off) adjustment; powered by 8-hour circulation pump
Heater:	North America (60 Hz): 5.5 kW, High Flow
Export (50 Hz):	High Flow, 2.7 kW
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 220-240 VAC@ 1x32A, 1x20A/1x16A, or 3x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.
Warranty*	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year True™ Water System, 1 Year Stereo Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo
Special Features (Optional)	SmartTub® Module (Must order with the True™ Water System)
Audio System (Optional)	BLUEWAVE® Spa Stereo System with Bluetooth capability and Aux 3.5 mm headphone jack port; 4 premium speakers, a powered subwoofer




*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-435

Operation/Seat Depths

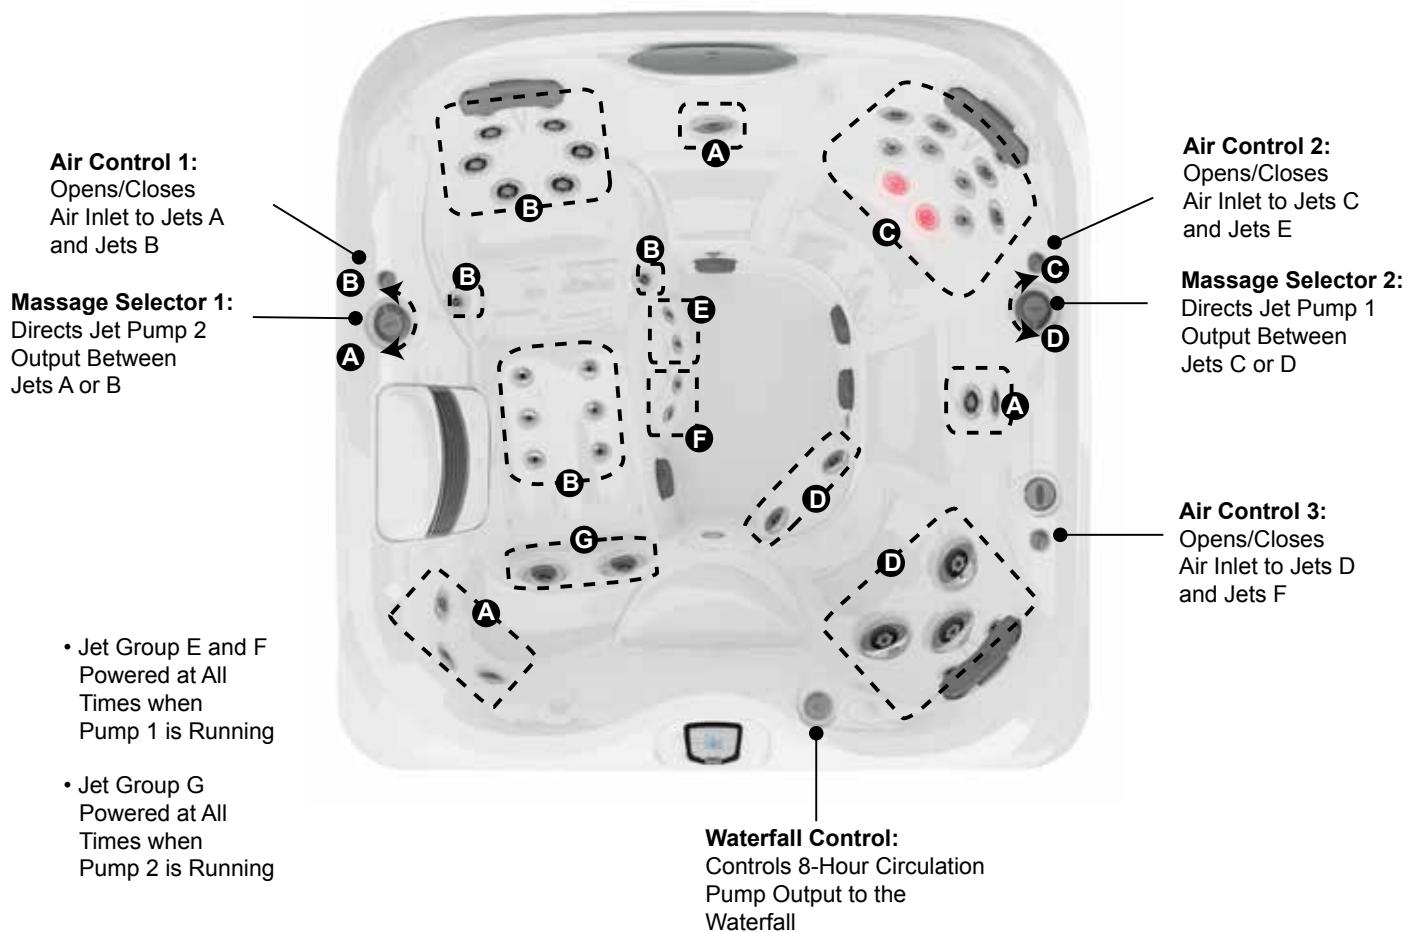

45 Total Jets (plus 2 IR Therapy Lights)





Spa Operation Subject to Change without Notice

Seat Depths

A = 17.75" (45.09 cm)
B = 27.75" (70.49 cm)
C = 29.00" (73.66 cm)
D = 23.00" (58.42 cm)
E = 30.00" (76.20 cm)
F = 23.50" (59.69 cm)

G = 25.50" (64.77 cm)
H = 33.50" (85.09 cm)
I = 20.50" (52.07 cm)



Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5"** (1.27 cm).

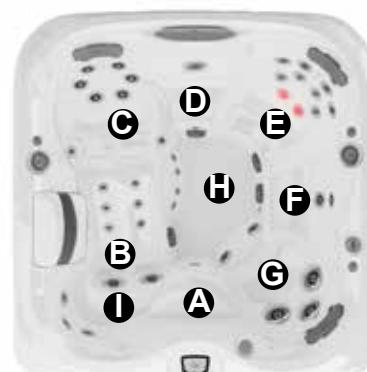

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-435

Dimensions

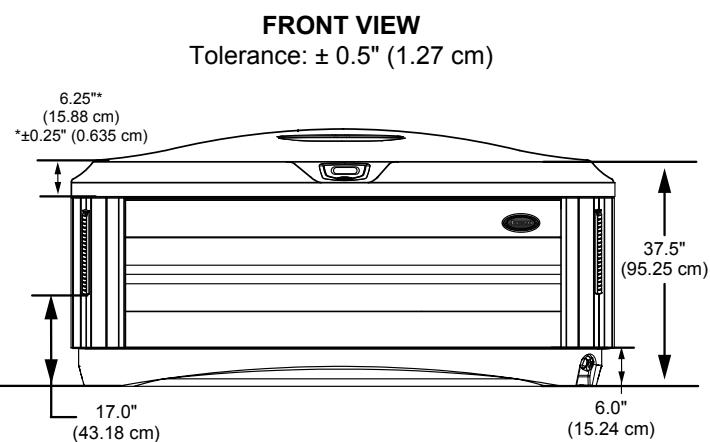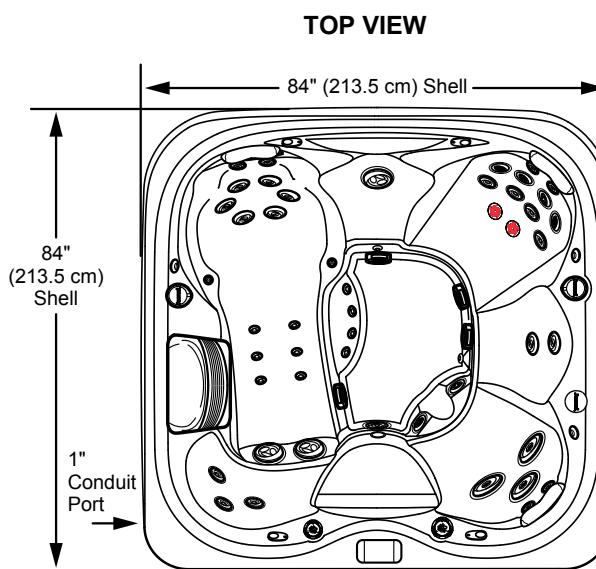


FRONT


Equipment Bay/Pump Access
True™ Water Care System,
Optional BLUEWAVE®,
and SmartTub System
located behind the cabinet

Important Panel Details

NOTE: Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

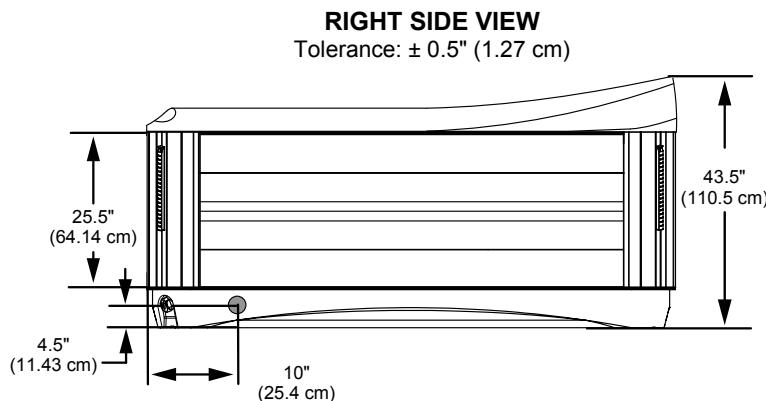

***IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.**

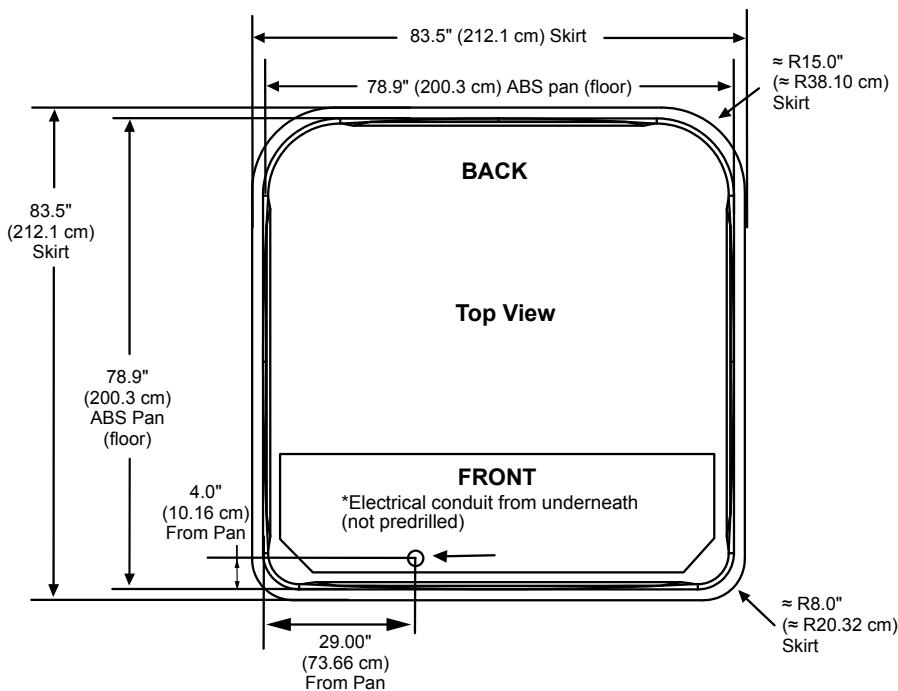


Dimensions/specifications subject to change without notice. Tolerance $\pm 0.5"$ (1.27 cm)

Jacuzzi J-LXL


Specifications

Seating Capacity5-6
Dimensions89" x 89" x 34" (226.06 cm x 226.06 cm x 86 cm); For complete dimensions, see page 80
Dry Weight914 lbs (415 kg)
Filled Weight (Spa Volume)4,625 lbs (2,098 kg)
Filled Weight (Average Fill)3,666 lbs (1,663 kg)
Water Capacity (Spa Volume)445 US gallons (1,685 Liters)
Water Capacity (Average Fill)330 US gallons (1,249 Liters)
Electronic ControlsProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting.
Pump 1North America (60 Hz): 1-Speed, 5.1 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous
Pump 2North America (60 Hz): 1-Speed, 5.1 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous
Circulation PumpYes, 8-hour
Total PowerPro® Jets39 (Plus 2 IR Therapy Lights)
Seat A Jets2 PowerPro® NX2, 2 PowerPro® RX, 2 PowerPro® FX Large Rotational, 2 PowerPro® FX Rotational, 6 PowerPro® FX
Seat B Jets4 PowerPro® RX
Seat C Jets2 PowerPro® NX2, 7 PowerPro® FX, 2 IR Therapy Lights
Seat D Jets2 PowerPro® FX Rotational
Seat E Jets2 PowerPro® FX Large Rotational, 2 PowerPro® MX
Seat F Jets2 PowerPro® NX2
Footwell (G)2 PowerPro® FX, 2 PowerPro® MX
Massage Selector1
Air Controls3, On/Off rocker switch air controller
Water Management SystemOne ProClarity® 40 ft ² filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft ² filter; Floating Weir; True™ Water System (Must order with SmartTub® option) Export (50 Hz): ClearRay Active Oxygen® System
LED LightingTwo underwater light with 4 color modes, waterfall lights, exterior corner lights
CabinetModern Hardwood, Brushed Gray, Smoked Ebony
Acrylic ColorsPlatinum, Porcelain
Headrests3
WaterfallsOne; Independent flow rate (on or off) adjustment powered by pump 1
Heater:North America (60 Hz): 5.5 kW, High Flow Export (50 Hz): High Flow, 2.7 kW
Electrical Requirements:North America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 220-240 VAC@1x32A, 1x20A/1x16A, or 3x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.
Warranty*North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 1 Year True™ Water System, 2 Years Lights; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights
Special Features (Optional)SmartTub® Module (Must order with the True™ Water System)
Audio System (Optional)N/A

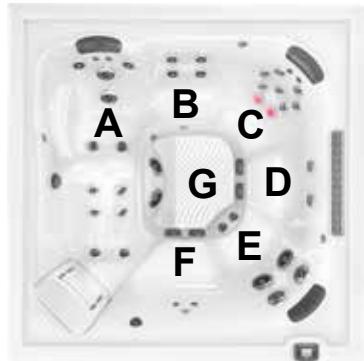

Jacuzzi J-LXL

Operation/Seat Depths

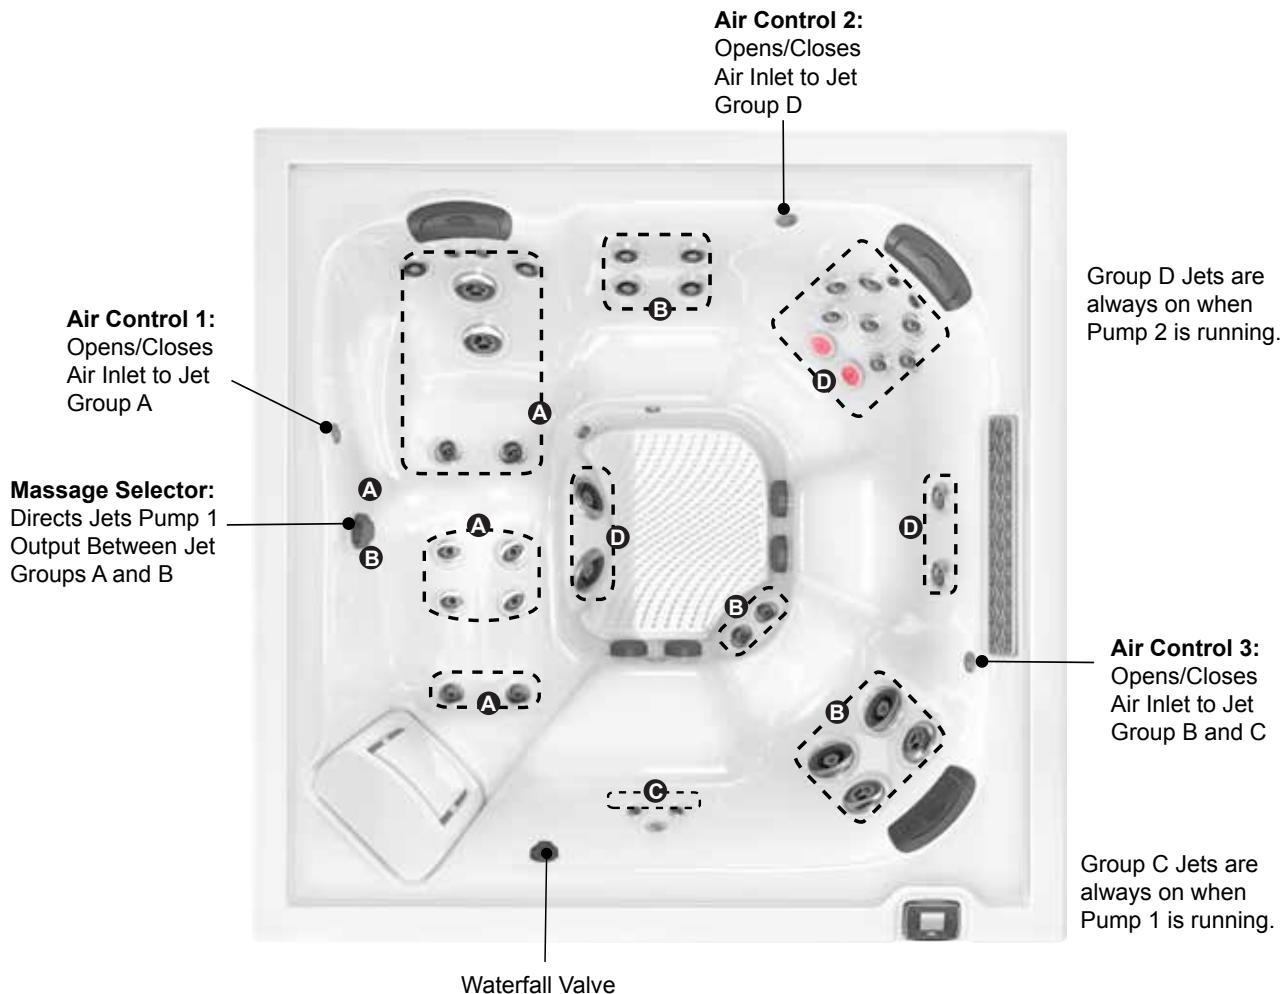

39 Total Jets (plus 2 IR Therapy Lights)



Power-Pro® NX2
Jets (6)



Power-Pro® RX
Jets (6)



Power-Pro® FX
Jets (15)



Power-Pro® FX
Rotational
Jets (4)



Power-Pro® FX
Large
Rotational
Jets (4)



Power-Pro® MX
Jets (4)



Jacuzzi® IR
+ Red Light
Therapy
Lights (2)


Spa Operation Subject to Change without Notice

Seat Depths

A = 25.00" (63.50 cm)
B = 22.00" (55.88 cm)
C = 27.00" (68.58 cm)
D = 20.88" (53.02 cm)
E = 26.25" (66.68 cm)

F = 18.38" (46.67 cm)
G = 24.25" (61.60 cm)
H = 31.00" (78.74 cm)

Listed dimensions represent distance from top of the deck to lowest point in seat. Tolerance $\pm 0.5"$ (1.27 cm).

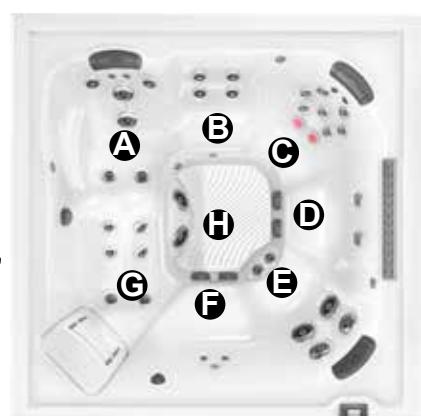


Dimensions/Specifications are Subject to Change Without Notice


Jacuzzi J-LXL

Dimensions


TOP VIEW

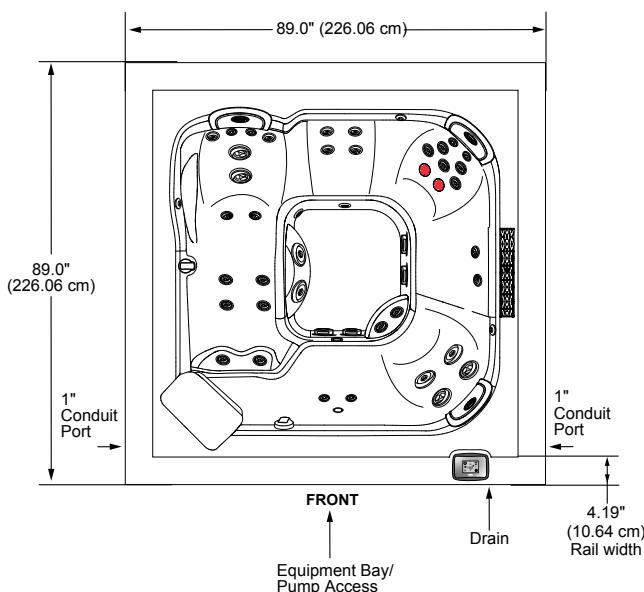


FRONT/BACK SIDE VIEW

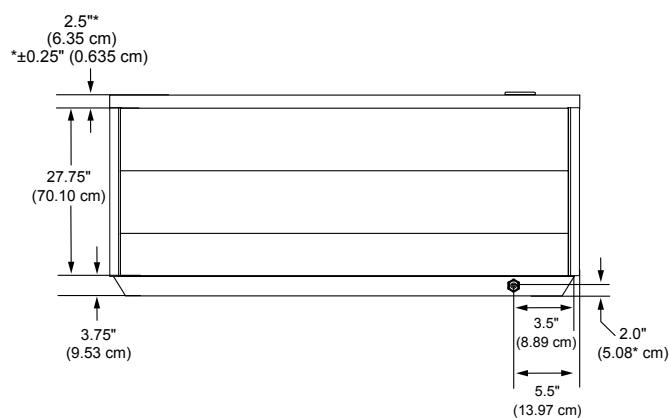

RIGHT SIDE VIEW

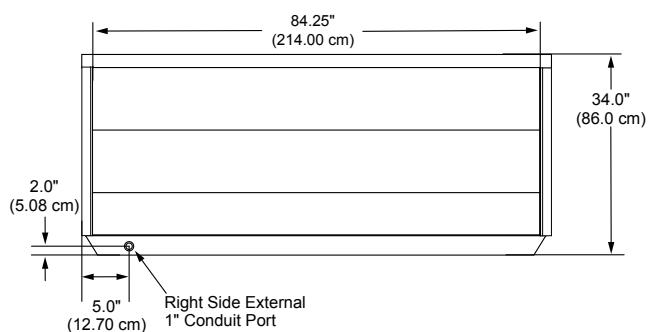

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

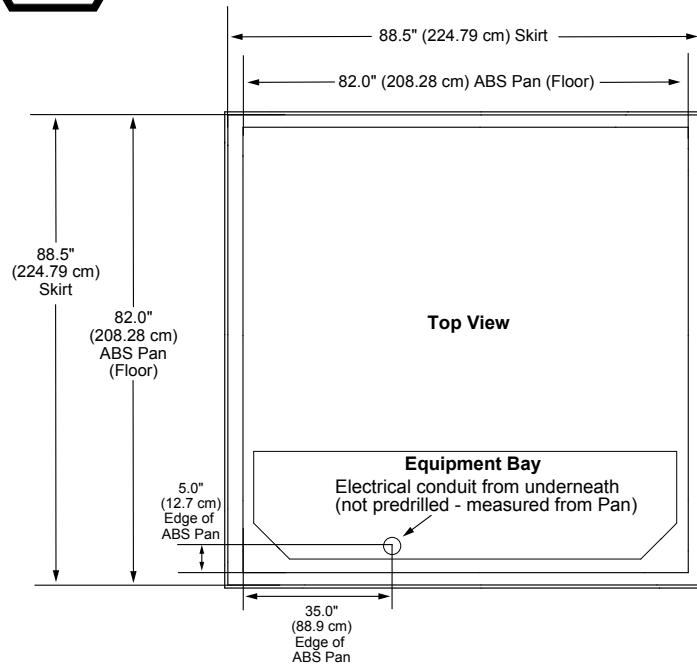


Dimensions/specifications subject to change without notice. Tolerance: ± 0.5" (1.27 cm)

Dimensions/specifications subject to change without notice. Tolerance ±0.5" (1.27 cm)

Jacuzzi J-LX

Specifications

Seating Capacity6-7
Dimensions89" x 89" x 34" (226.06 cm x 226.06 cm x 86 cm); For complete dimensions, see page 80
Dry Weight855 lbs (388 kg)
Filled Weight (Spa Volume)4,525 (2,052 kg)
Filled Weight (Average Fill)3,607 lbs (1,636 kg)
Water Capacity (Spa Volume)440 US gallons (1,666 Liters)
Water Capacity (Average Fill)330 US gallons (1,249 Liters)
Electronic ControlsProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting.
Pump 1North America (60 Hz): 1-Speed, 5.1 HP brake, 2.5 HP continuous, 56 Frame
Export (50 Hz): 1-Speed, 2.0 HP continuous
Pump 2North America (60 Hz): 1-Speed, 5.1 HP brake, 2.5 HP continuous, 56 Frame
Export (50 Hz): 1-Speed, 2.0 HP continuous
Circulation PumpYes, 8-hour
Total PowerPro® Jets41 (plus 2 IR Therapy Lights)
Seat A Jets2 PowerPro® NX2, 2 PowerPro® RX, 2 PowerPro® FX Large Rotational, 2 PowerPro® FX
Seat B Jets2 PowerPro® FX Large Rotational, 2 PowerPro® MX, 2 PowerPro® FX
Seat C Jets4 PowerPro® RX
Seat D Jets2 PowerPro® NX2, 9 PowerPro® FX, 2 IR Therapy Lights
Seat E Jets3 PowerPro® FX
Seat F Jets2 PowerPro® NX2, 2 PowerPro® RX, 1 PowerPro® FX Large Rotational, 2 PowerPro® FX
Seat G Jets2 PowerPro® NX2
Massage Selector1
Air Controls4, On/Off rocker switch air controller
Water Management SystemOne ProClarity® 40 ft ² filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft ² filter; Floating Weir; True™ Water System (Must order with SmartTub® option)
Export (50 Hz): ClearRay Active Oxygen® System
LED LightingTwo underwater light with 4 color modes, waterfall lights, exterior corner lights
CabinetModern Hardwood, Brushed Gray, Smoked Ebony
Acrylic ColorsPlatinum, Porcelain
Headrests4
WaterfallsOne; Independent flow rate (on or off) adjustment powered by pump 1
Heater:North America (60 Hz): 5.5 kW, High Flow
Export (50 Hz): High Flow, 2.7 kW
Electrical Requirements:North America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 220-240 VAC@1x32A, 1x20A/1x16A, or 3x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.
Warranty*North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 1 Year True™ Water System, 2 Years Lights; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights
Special Features (Optional)SmartTub® Module (Must order with the True™ Water System)
Audio System (Optional)N/A

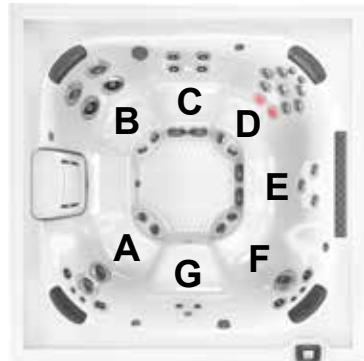


*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-LX

Operation/Seat Depths

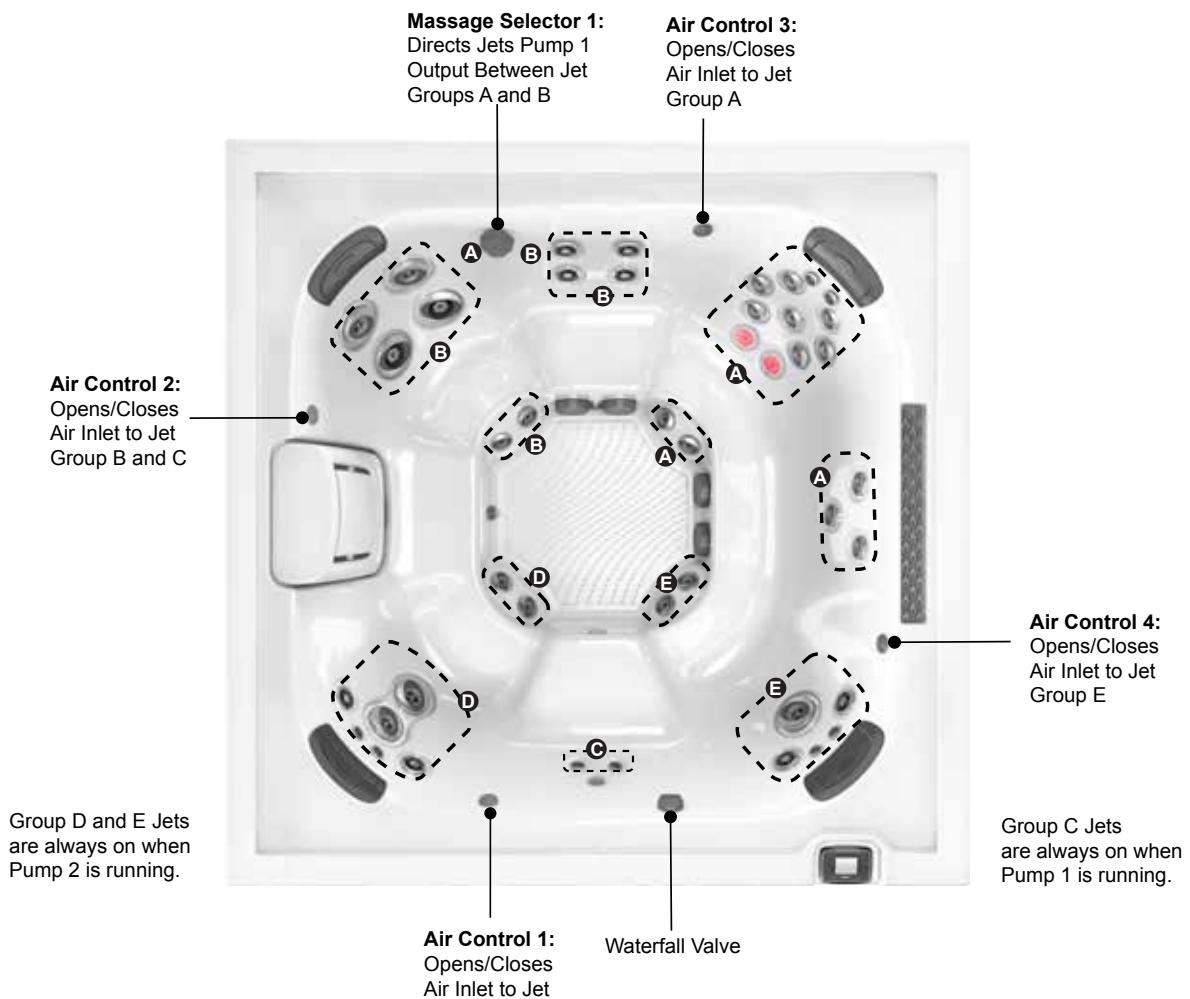

41 Total Jets (plus 2 IR Therapy Lights)



Spa Operation Subject to Change without Notice

Seat Depths

A = 24.25" (61.60 cm)
B = 21.13" (53.66 cm)
C = 26.13" (66.36 cm)
D = 20.50" (52.07 cm)
E = 26.81" (68.10 cm)

F = 25.00" (63.50 cm)
G = 26.31" (66.83 cm)
H = 18.00" (45.72 cm)
I = 31.00" (78.74 cm)

Listed dimensions represent distance from top of the deck to lowest point in seat. Tolerance $\pm 0.5"$ (1.27 cm).




Dimensions/Specifications are Subject to Change Without Notice


Jacuzzi J-LX

Dimensions


TOP VIEW

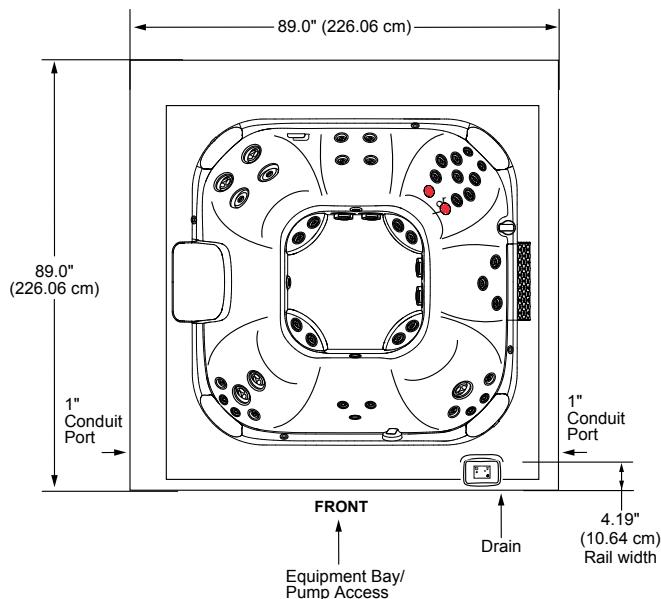


FRONT/BACK SIDE VIEW

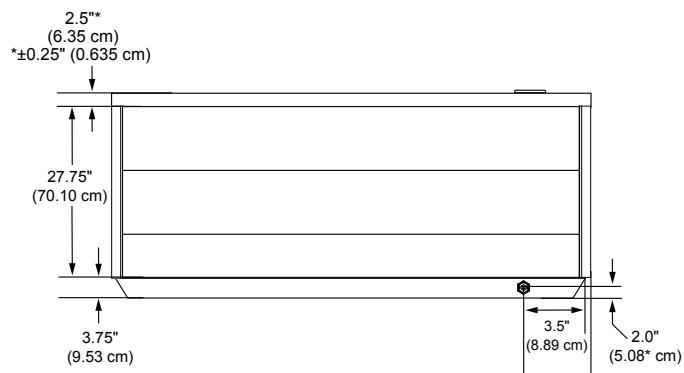

RIGHT SIDE VIEW

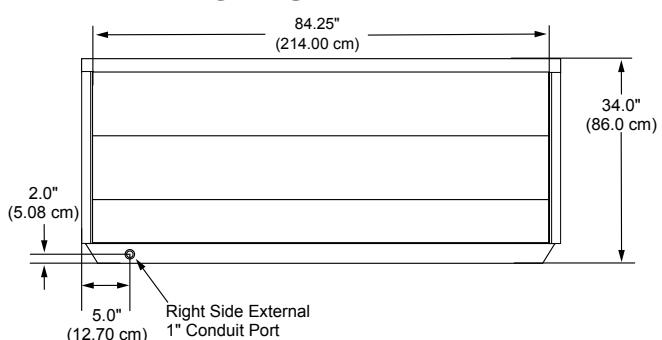

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

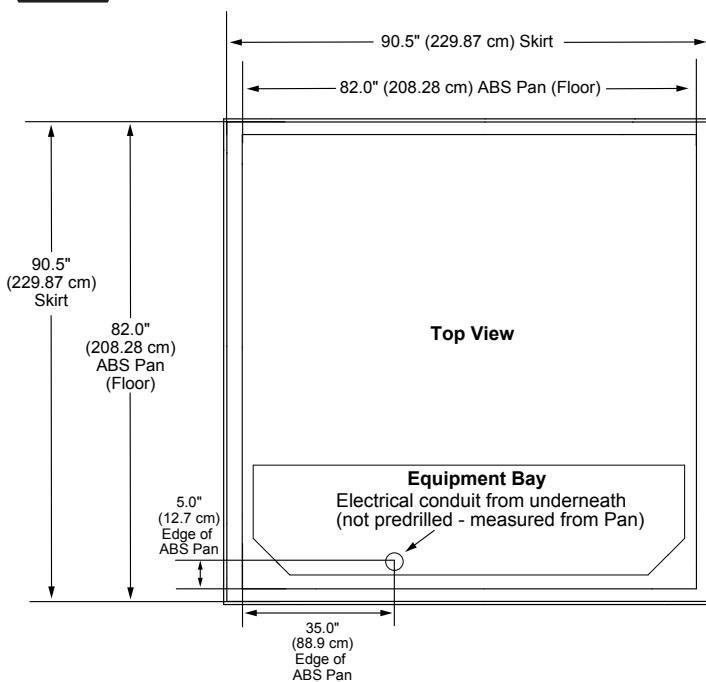

Dimensions/specifications subject to change without notice. Tolerance ±0.5" (1.27 cm)

Jacuzzi J-385

Specifications

Seating Capacity	6-7
Dimensions	91" x 91" x 37.50" (231 cm x 231 cm x 95.25 cm); For complete dimensions, see page 81
Dry Weight	850 lbs (386 kg)
Filled Weight (Spa Volume)	5,771 lbs (2,618 kg)
Filled Weight (Average Fill)	4,686 lbs (2,126 kg)
Water Capacity (Spa Volume)	590 US gallons (2,233 Liters)
Water Capacity (Average Fill)	460 US gallons (1,741 Liters)
Electronic Controls	Solid state electronic touchscreen controls, programmable temperature, filtration, and heat cycles
Pump 1	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous
Pump 2	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous
Circulation Pump	Yes, 8-hour
Heater	North America (60 Hz): 5.5kW High Flow Export (50 Hz): 2.7kW High Flow
Total PowerPro® Jets	51
Seat A Jets	4 PowerPro® FX, 2 PowerPro® FX Large Rotational
Seat B Jets	1 PowerPro® FX Rotational, 2 PowerPro® FX Large
Seat C Jets	2 PowerPro® NX2, 2 PowerPro® FX Rotational, 4 PowerPro® FX, 2 PowerPro® FX Large
Seat D Jets	2 PowerPro® FX Large Rotational
Seat E Jets (Standard model)	10 PowerPro® FX, 2 PowerPro® FX Rotational, 2 PowerPro® BX
Seat E Jets (optional IR Therapy)	8 PowerPro® FX, 2 IR Therapy Lights, 2 PowerPro® FX Rotational, 2 PowerPro® BX
Seat E HYDROSOOTHE™ Jets	2 PowerPro® FX Directional with independent flow rate valve
Seat F Jets	2 PowerPro® NX2, 3 PowerPro® MX
Footwell (G)	8 PowerPro® FX Small, 1 PowerPro® FX
Massage Selectors	2
Air Controls	4, On/Off rocker switch air controller
Water Management System	Two 60 ft ² Filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1; Factory installed ClearRay Active Oxygen® System; Optional True™ Water System (Must order with SmartTub® option) Export (50 Hz): ClearRay® UV-C System
LED Lighting	One underwater prolite with 4 color modes, one colored waterfall light, cup holders, 2 HYDROSOOTHE pillow lights, and exterior lights
ProFinish™ Cabinet Colors	Modern Hardwood, Brushed Gray, and Smoked Ebony
Acrylic Colors	Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
Headrests	4
Waterfalls	One independent flow rate (on or off) adjustment; powered by the circulation pump
Heater:	North America (60 Hz): 5.5 kW, High Flow Export (50 Hz): High Flow, 2.7 kW
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 220-240 VAC@1x32A, 1x20A/1x16A, 3x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.
Warranty*	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo
Special Features (Optional)	SmartTub® Module (Must order with the True™ Water System), 2 IR Therapy Lights
Audio System (Optional)	BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers and a subwoofer

*(See Warranty Document for Specific Details)


Dimensions/Specifications are Subject to Change Without Notice



Shown with the optional
IR Therapy Lights

Jacuzzi J-385

Operation/Seat Depths

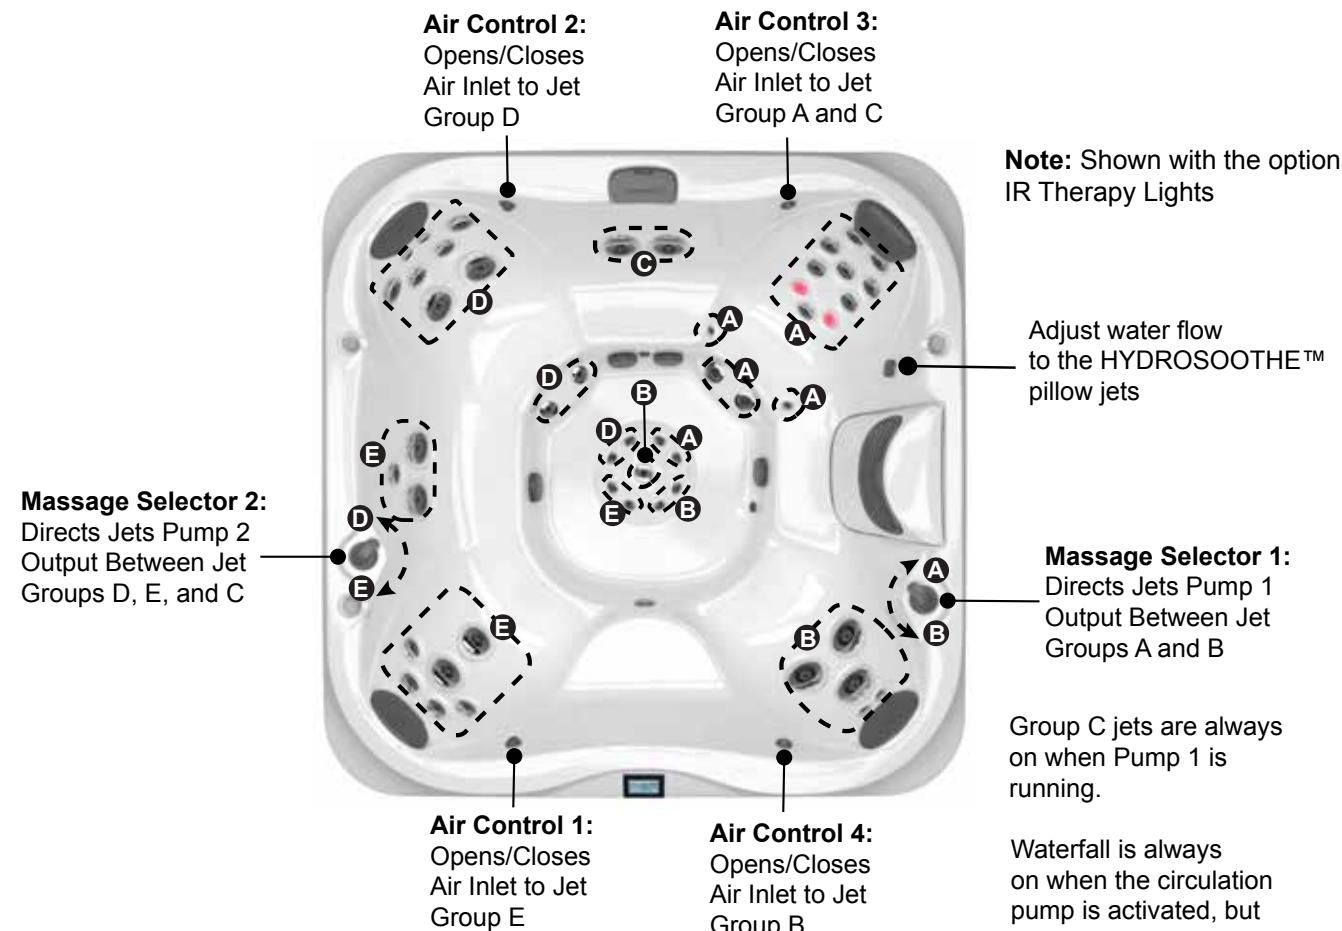

51 Total Jets



Spa Operation Subject to Change without Notice

Seat Depths

A = 26.50" (67.31 cm)

B = 25.00" (63.50 cm)

C = 26.75" (67.95 cm)

D = 23.25" (59.06 cm)

E = 28.25" (71.76 cm)

F = 27.13" (68.90 cm)

G = 17.00" (43.18 cm)

H = 33.25" (84.46 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance $\pm 0.5"$ (1.27 cm).



Dimensions/Specifications are Subject to Change Without Notice


Jacuzzi J-385

Dimensions

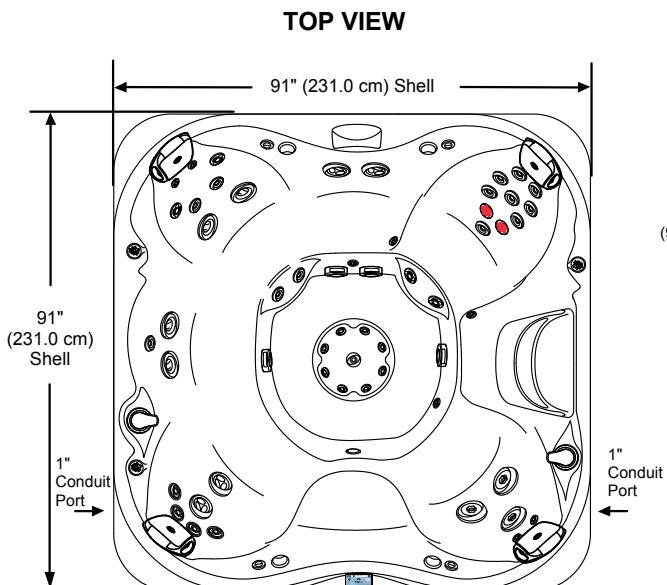


FRONT


Equipment Bay/Pump Access
ClearRay Active Oxygen,
Optional BLUEWAVE,
and Optional SmartTub Module
behind skirt panels

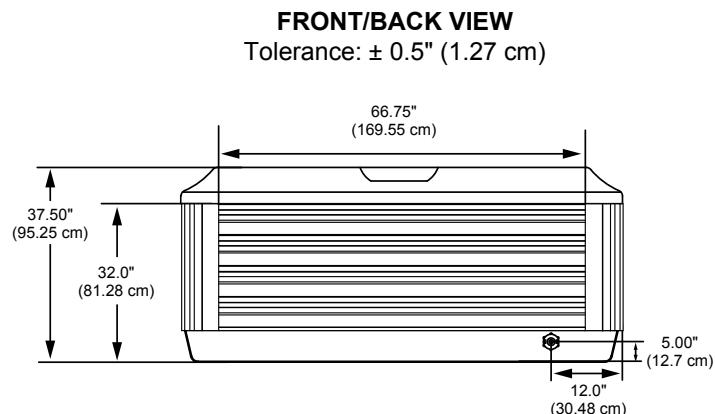

LEFT SIDE VIEW
Tolerance: $\pm 0.5"$ (1.27 cm)

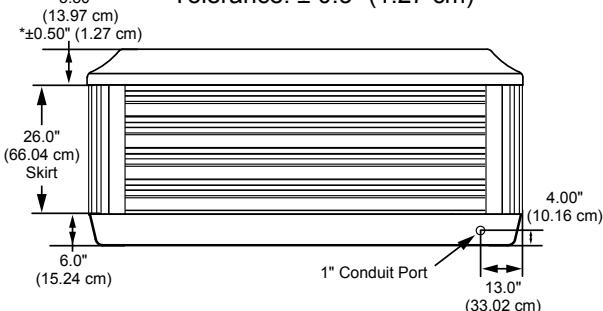


IMPORTANT! Always measure each hot tub
for exact dimensions BEFORE designing its
foundational support and/or decking.

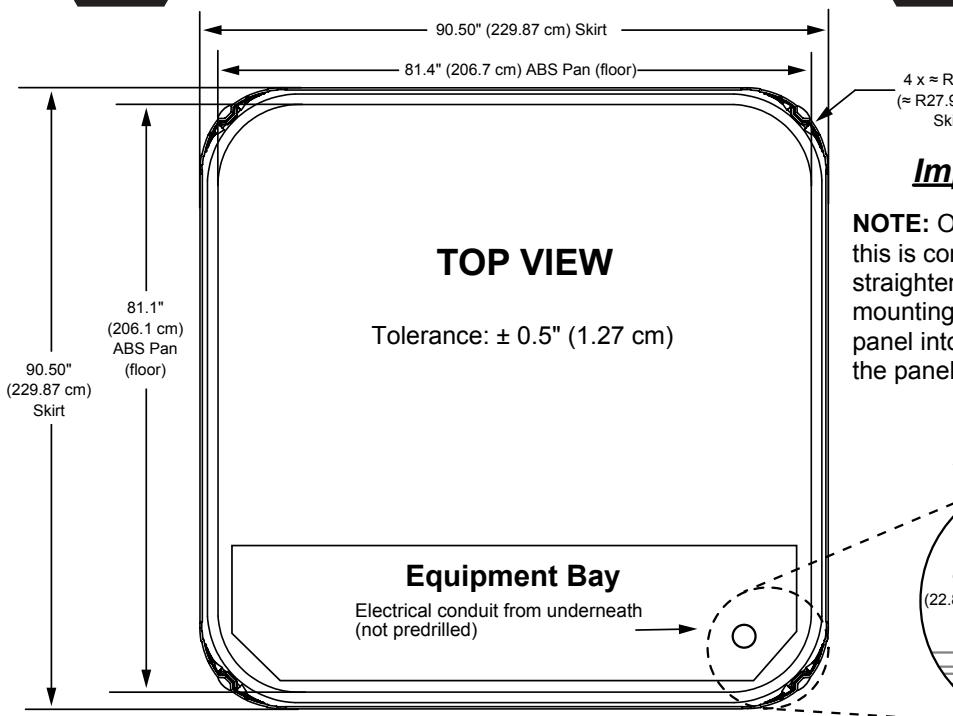

Important Panel Details

NOTE: Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

From the edge of the
ABS pan



Dimensions/specifications subject to change without notice. Tolerance $\pm 0.5"$ (1.27 cm)

Jacuzzi J-375

Specifications


Seating Capacity	5-6 Adults
Dimensions	91" x 91" x 37.50" (231 cm x 231 cm x 95.25 cm); For complete dimensions, see page 81
Dry Weight	830 lbs (376 kg)
Filled Weight (Spa Volume)	5,667 lbs (2,571 kg)
Filled Weight (Average Fill)	4,541 lbs (2,060 kg)
Water Capacity (Spa Volume)	580 US gallons (2,196 Liters)
Water Capacity (Average Fill)	445 US gallons (1,685 Liters)
Electronic Controls	Solid state electronic touchscreen controls, programmable temperature, filtration, and heat cycles
Pump 1	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous
Pump 2	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous
Circulation Pump	Yes, 8-hour
Heater	North America (60 Hz): 5.5kW High Flow Export (50 Hz): 2.7kW High Flow
Total PowerPro® Jets	52
Seat A Jets	2 PowerPro® NX2, 2 PowerPro® FX Large, 2 PowerPro® FX Rotational, 2 PowerPro® FX
Seat B Jets	4 PowerPro® FX, 2 PowerPro® FX Large Rotational, 12 PowerPro® BX, 2 PowerPro® FX Rotational
Seat C Jets	1 PowerPro® FX Large Rotational
Seat D Jets (Standard model)	10 PowerPro® FX, 2 PowerPro® FX Rotational
Seat D Jets (optional IR Therapy)	8 PowerPro® FX, 2 IR Therapy Lights, 2 PowerPro® FX Rotational
Seat D HYDROSOOTHE™ Jets	2 PowerPro® FX Directional with independent flow rate valve
Seat E Jets	2 PowerPro® NX2, 3 PowerPro® MX, 2 PowerPro® FX
Footwell (F)	2 PowerPro® MX
Massage Selectors	2
Air Controls	4, On/Off rocker switch air controller
Water Management System	Two 60 ft ² Filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1; Factory installed ClearRay Active Oxygen® System; Optional True™ Water System (Must order with SmartTub® option) Export (50 Hz): ClearRay® UV-C System
LED Lighting	One underwater prolite with 4 color modes, one colored waterfall light, cup holders, 2 HYDROSOOTHE pillow lights, and exterior lights
ProFinish™ Cabinet Colors	Modern Hardwood, Brushed Gray, and Smoked Ebony
Acrylic Colors	Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
Headrests	4
Waterfalls	One independent flow rate (on or off) adjustment; powered by the circulation pump
Heater:	North America (60 Hz): 5.5 kW, High Flow Export (50 Hz): High Flow, 2.7 kW
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 220-240 VAC@1x32A, 1x20A/1x16A, 3x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.
Warranty*	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo
Special Features (Optional)	SmartTub® Module (Must order with the True™ Water System), 2 IR Therapy Lights
Audio System (Optional)	BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers and subwoofer



Shown with the optional
IR Therapy Lights

Jacuzzi J-375

Operation/Seat Depths

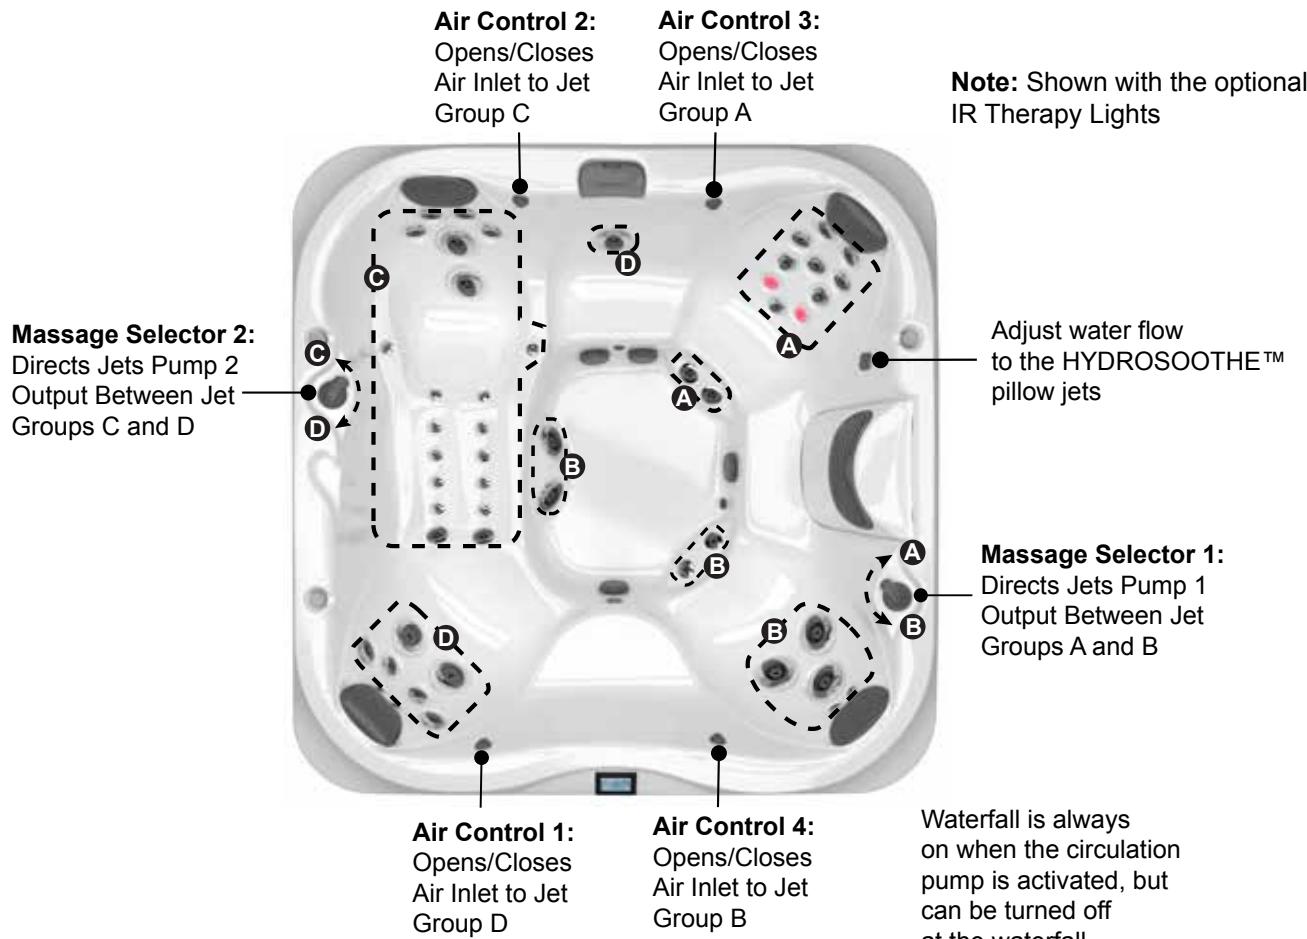

52 Total Jets



Spa Operation Subject to Change without Notice

Seat Depths

A = 26.50" (67.31 cm)

B = 27.50" (69.85 cm)

C = 23.50" (59.69 cm)

D = 28.25" (71.76 cm)

E = 27.25" (69.22 cm)

F = 17.00" (43.18 cm)

G = 34.00" (86.36 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat.
Tolerance $\pm 0.5"$ (1.27 cm).



Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-375


Dimensions

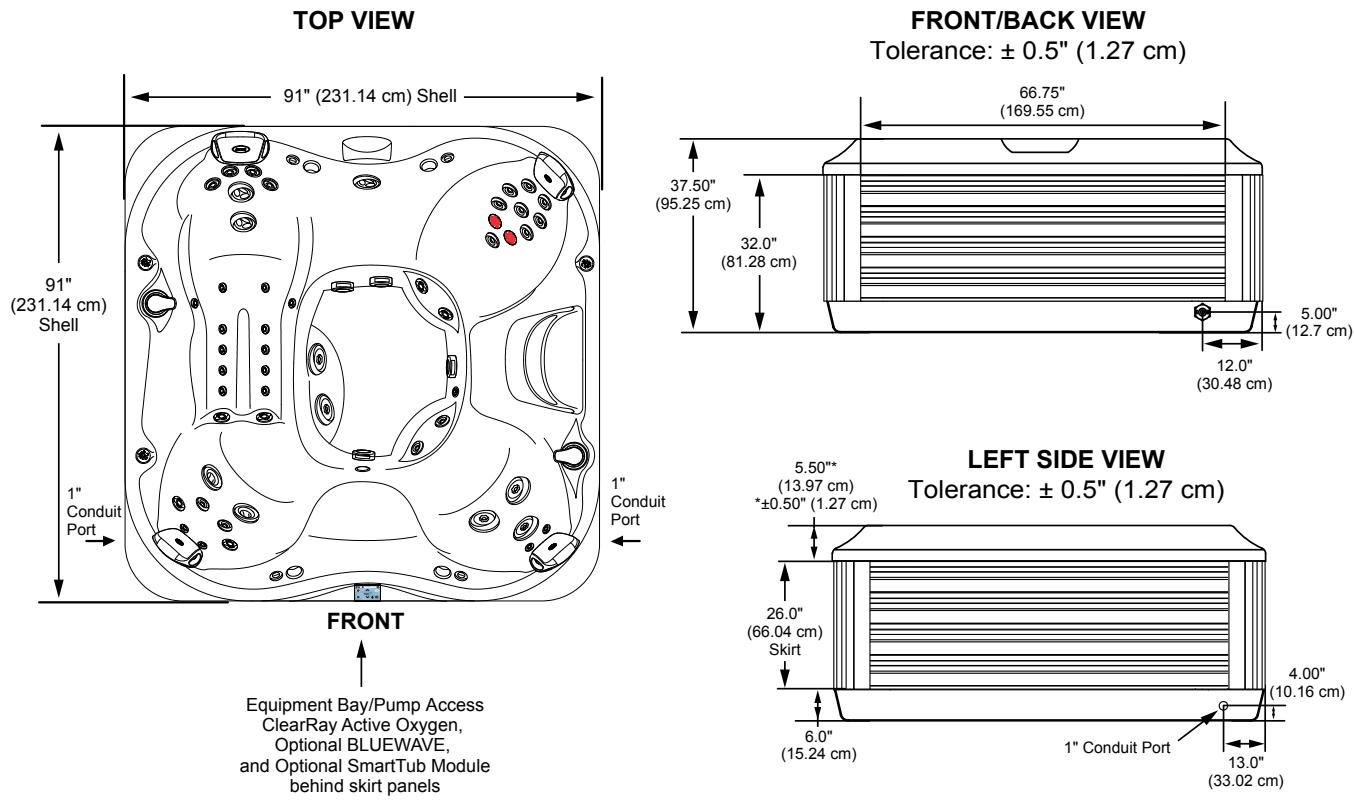

STOP

IMPORTANT! Always measure each hot tub
for exact dimensions BEFORE designing its
foundational support and/or decking.


STOP

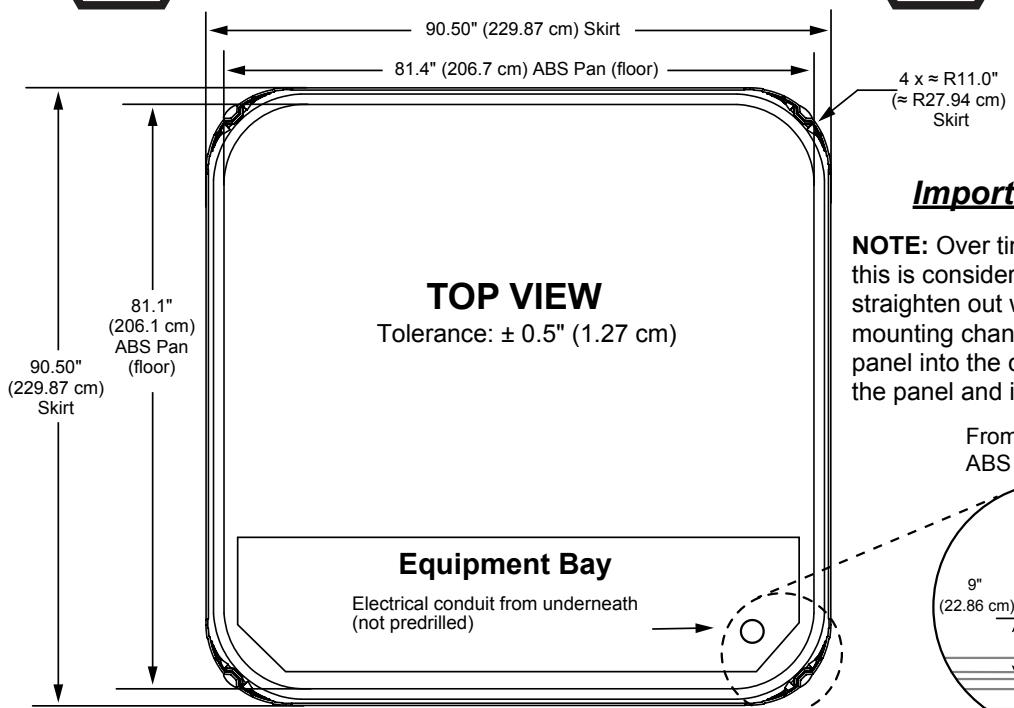

Important Panel Details

NOTE: Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

From the edge of the
ABS pan



Dimensions/specifications subject to change without notice. Tolerance $\pm 0.5"$ (1.27 cm)

Jacuzzi J-365

Specifications

Seating Capacity6-7 Adults
Dimensions84" x 91" x 37.50" (213.5 cm x 231 cm x 95.25 cm); For Complete Dimensions, See page 81
Dry Weight805 lbs (365 kg)
Filled Weight (Spa Volume)4,975 lbs (2,257 kg)
Filled Weight (Average Fill)4,099 lbs (1,859 kg)
Water Capacity (Spa Volume)500 US gallons (1,893 Liters)
Water Capacity (Average Fill)395 US gallons (1,495 Liters)
Electronic ControlsSolid state electronic touchscreen controls, programmable temperature, filtration, and heat cycles
Pump 1North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous
Pump 2North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous
Circulation PumpYes, 8-Hour
HeaterNorth America (60 Hz): 5.5kW High Flow Export (50 Hz) 2.7kW High Flow
Total PowerPro® Jets46
Seat A Jets4 PowerPro® FX, 2 PowerPro® FX Large Rotational
Seat B Jets1 PowerPro® FX Large
Seat C Jets2 PowerPro® NX2, 2 PowerPro® FX, 3 PowerPro® MX
Seat D Jets1 PowerPro® FX Large Rotational
Seat E Jets (Standard model)10 PowerPro® FX, 2 PowerPro® FX Rotational
Seat E Jets (optional IR Therapy)8 PowerPro® FX, 2 IR Therapy Lights, 2 PowerPro® FX Rotational
Seat E HYDROSOOTHE™ Jets2 PowerPro® FX Directional with independent flow rate valve
Seat F Jets2 PowerPro® NX2, 2 PowerPro® FX Rotational, 2 PowerPro® FX, 2 PowerPro® FX Large
Footwell (G)8 PowerPro® FX Small, 1 PowerPro® FX
Massage Selectors2
Air Controls4, On/Off rocker style
Water Management SystemTwo 60 ft ² filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1; Factory installed ClearRay Active Oxygen® System; Optional True™ Water System (Must order with SmartTub® option) Export (50 Hz): ClearRay® UV-C System
LED LightingOne underwater light with 4 color modes, one colored waterfall light, cup holders, 2 HYDROSOOTHE pillow lights, and exterior lights
ProFinish™ Cabinet ColorsModern Hardwood, Brushed Gray, and Smoked Ebony
Acrylic ColorsPlatinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
Headrests4
WaterfallsOne independent flow rate (on or off) adjustment; powered by the circulation pump
Heater:North America (60 Hz): 5.5 kW, High Flow Export (50 Hz): High Flow, 2.7 kW
Electrical RequirementsNorth America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 220-240 VAC@1x32A, 1x20A/1x16A, 3x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD Breakers are required for this configuration.
Warranty*North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo
Special Features (Optional)SmartTub® Module (Must order with the True™ Water System), 2 IR Therapy Lights
Audio System (Optional)BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers and subwoofer

*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice




Show with the optional
IR Therapy Lights

Jacuzzi J-365

Operation/Seat Depths

Note: Shown with the optional IR Therapy Lights

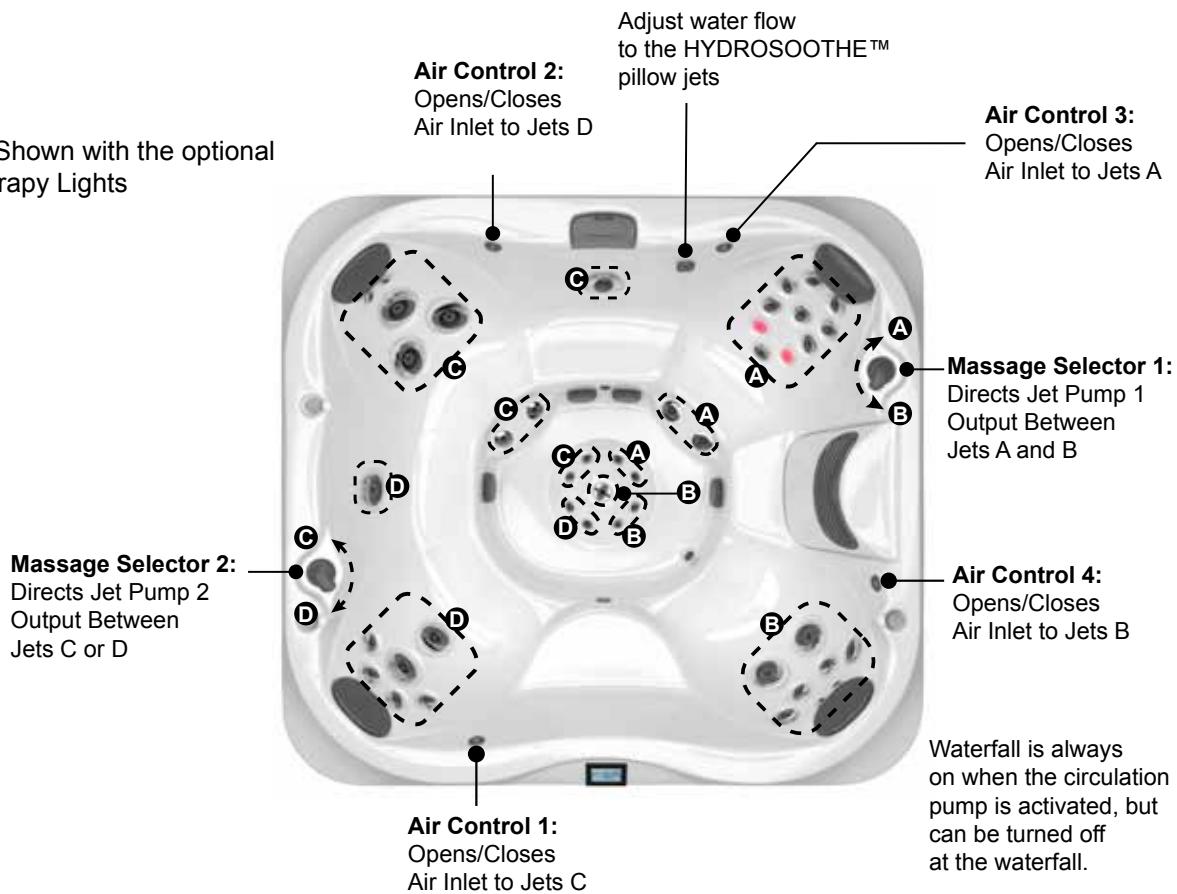

46 Total Jets



Spa Operation Subject to Change without Notice

Seat Depths

- A = 26.50" (67.47 cm)**
- B = 25.25" (64.14 cm)**
- C = 25.25" (64.14 cm)**
- D = 23.75" (60.33 cm)**
- E = 28.25" (71.76 cm)**

- F = 27.25" (69.22 cm)**
- G = 17.50" (44.45 cm)**
- H = 33.75" (85.73 cm)**

Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance $\pm 0.5"$ (1.27 cm).




Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-365


Dimensions

TOP VIEW

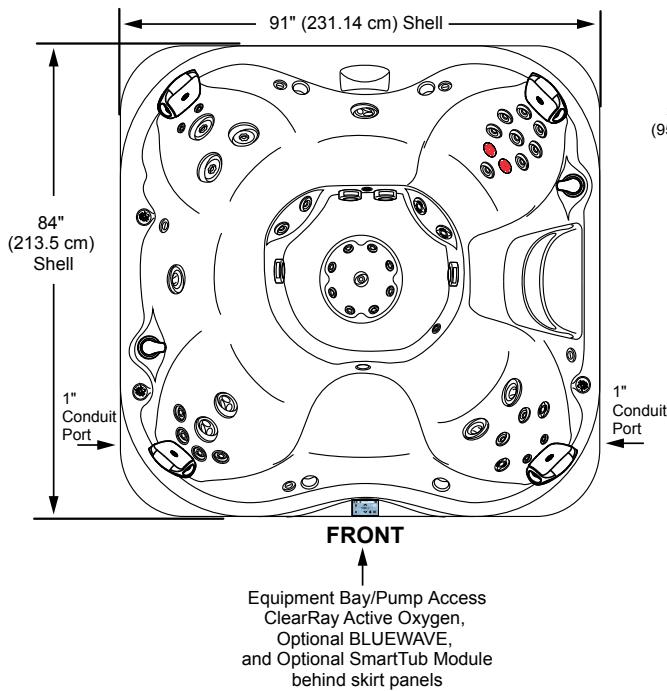


FRONT/BACK VIEW

Tolerance: $\pm 0.5"$ (1.27 cm)

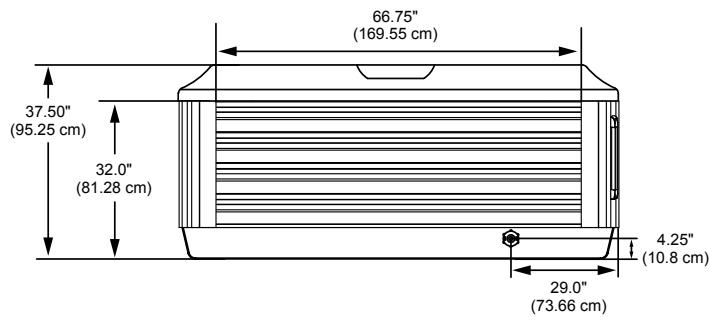

LEFT SIDE VIEW

Tolerance: $\pm 0.5"$ (1.27 cm)

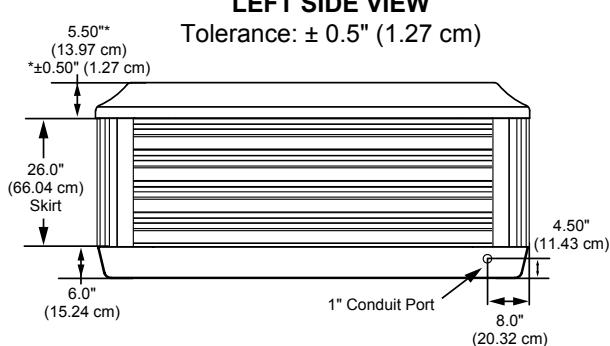


STOP

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

STOP


TOP VIEW

Tolerance: $\pm 0.5"$ (1.27 cm)

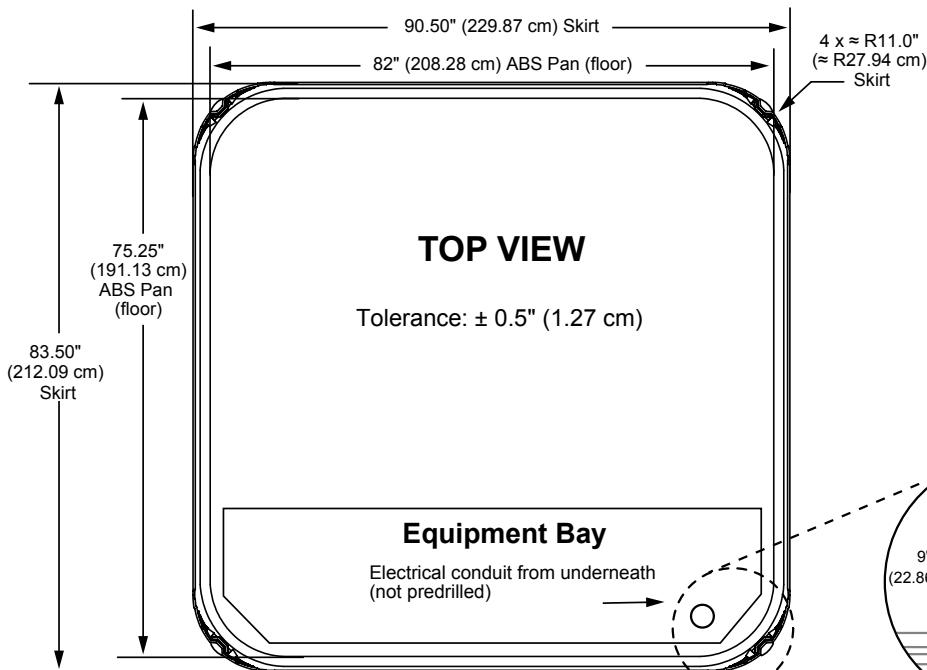

Important Panel Details

NOTE: Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.



From the edge of
the ABS pan

Dimensions/specifications subject to change without notice. Tolerance $\pm 0.5"$ (1.27 cm)

Jacuzzi J-355

Specifications

Seating Capacity	5-6 Adults
Dimensions	84" x 91" x 37.50" (213.5 cm x 231 cm x 95.25 cm); For Complete Dimensions, See page 81
Dry Weight	813 lbs (369 kg)
Filled Weight (Spa Volume)	4,900 lbs (1,855 kg)
Filled Weight (Average Fill)	3,815 lbs (1,731 kg)
Water Capacity (Spa Volume)	490 US gallons (1,855 Liters)
Water Capacity (Average Fill)	360 US gallons (1,363 Liters)
Electronic Controls	Solid state electronic touchscreen controls, programmable temperature, filtration, and heat cycles
Pump 1	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous
Pump 2	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous
Circulation Pump	Yes, 8-hour
Heater	North America (60 Hz): 5.5kW High Flow Export (50 Hz): 2.7kW High Flow
Total PowerPro® Jets	44
Seat A Jets	2 PowerPro® NX2, 3 PowerPro® MX
Seat B Jets	2 PowerPro® FX Large
Seat C Jets (Standard model)	10 PowerPro® FX, 2 PowerPro® FX Rotational
Seat C Jets (optional IR Therapy)	8 PowerPro® FX, 2 IR Therapy Lights, 2 PowerPro® FX Rotational
Seat C HYDROSOOTHE™ Jets	2 PowerPro® FX Directional with independent flow rate valve
Seat D Jets	1 PowerPro® FX Large Rotational
Seat E Jets	4 PowerPro® FX, 2 PowerPro® FX Large Rotational, 12 PowerPro® BX, 2 PowerPro® FX Rotational
Footwell (F)	2 PowerPro® MX
Massage Selectors	2
Air Controls	3, On/Off rocker style
Water Management System	Two 60 ft ² filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1; Factory installed ClearRay Active Oxygen® System; Optional True™ Water System (Must order with SmartTub® option) Export (50 Hz): ClearRay® UV-C System
LED Lighting	One underwater light with 4 color modes, one colored waterfall light, cup holders, 2 HYDROSOOTHE pillow lights, and exterior lights
ProFinish™ Cabinet Colors	Modern Hardwood, Brushed Gray, and Smoked Ebony
Acrylic Colors	Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
Headrests	3
Waterfalls	One independent flow rate (on or off) adjustment; powered by the circulation pump
Heater:	North America (60 Hz): 5.5 kW, High Flow Export (50 Hz): High Flow, 2.7 kW
Electrical Requirements	North America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 220-240 VAC@1x32A, 1x20A/1x16A, 3x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD Breakers are required for this configuration.
Warranty*	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo
Special Features (Optional)	SmartTub® Module (Must order with the True™ Water System), 2 IR Therapy Lights
Audio System (Optional)	BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers and subwoofer




Shown with the optional
IR Therapy Lights

Jacuzzi J-355

Operation/Seat Depths

Note: Shown with the optional IR Therapy Lights

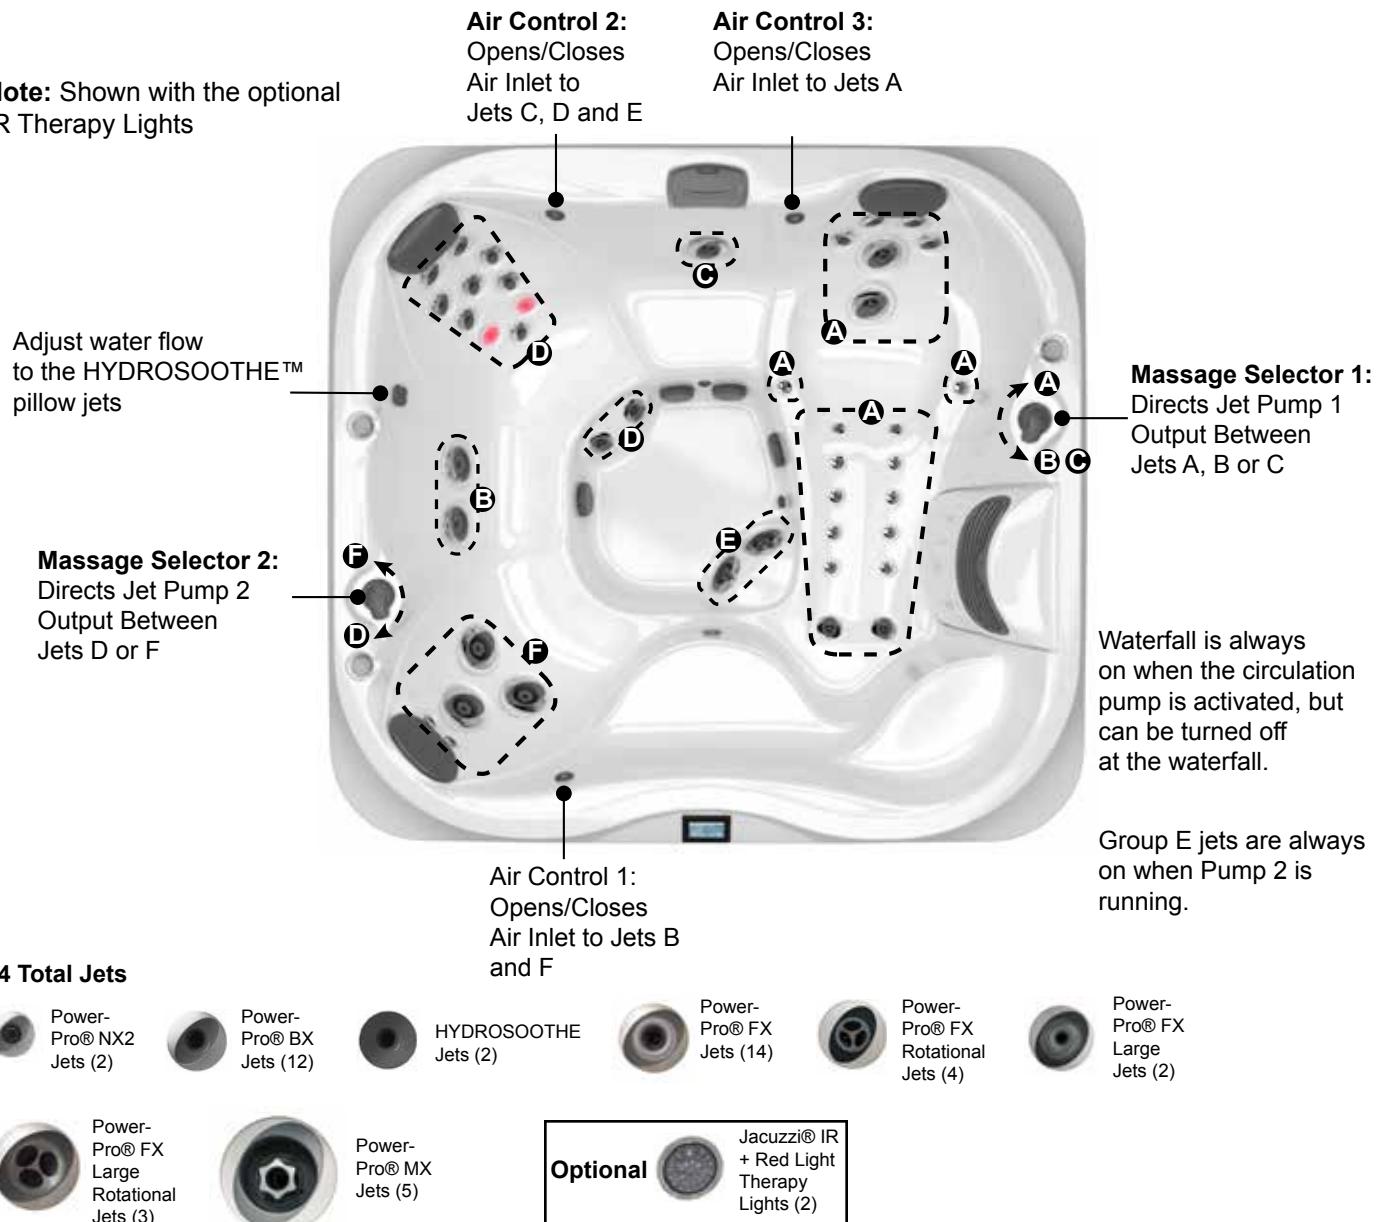

Spa Operation Subject to Change without Notice

Seat Depths

- A = 25.25" (64.14 cm)**
- B = 26.50" (67.31 cm)**
- C = 28.75" (73.02 cm)**
- D = 21.25" (53.98 cm)**
- E = 27.00" (68.58 cm)**

- F = 9.25" (23.50 cm)**
- G = 13.50" (34.29 cm)**
- H = 33.25" (84.45 cm)**




Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance $\pm 0.5"$ (1.27 cm).




Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-355

Dimensions

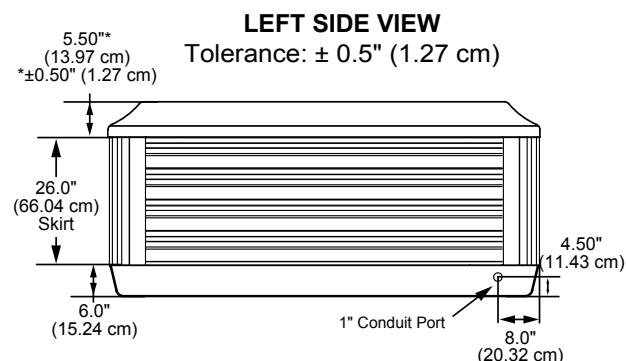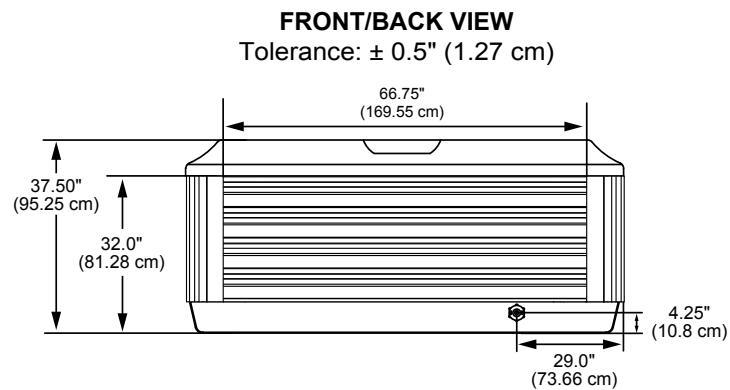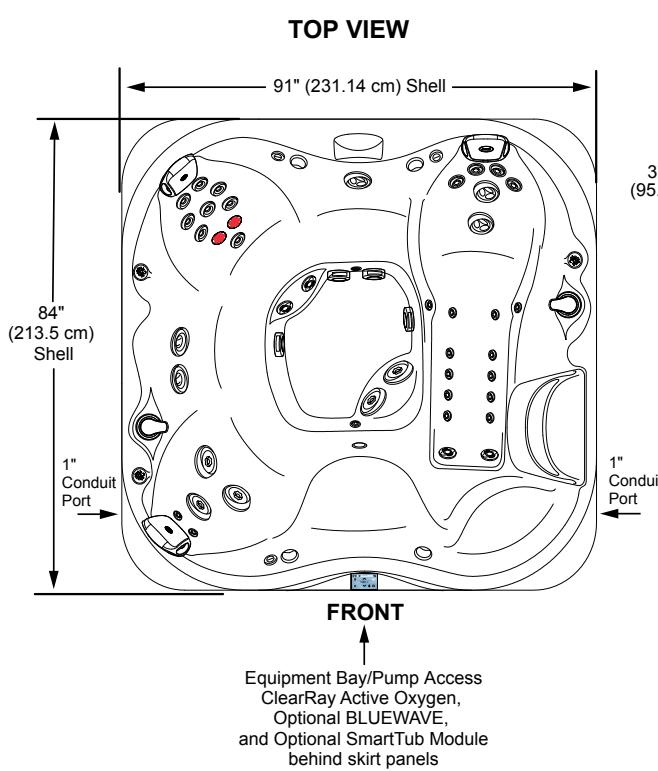


IMPORTANT! Always measure each hot tub
for exact dimensions BEFORE designing its
foundational support and/or decking.

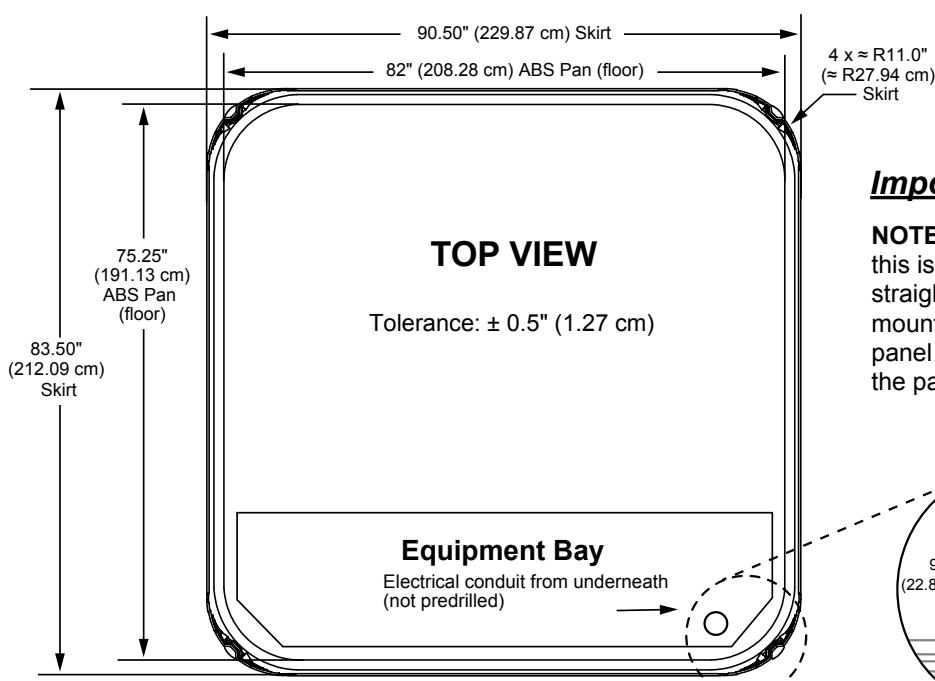

Important Panel Details

NOTE: Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.




Dimensions/specifications subject to change without notice. Tolerance $\pm 0.5"$ (1.27 cm)

Jacuzzi J-345

Specifications

Seating Capacity6-7 Adults
Dimensions84" x 84" x 36" (213.5 cm x 213.5 cm x 91.44 cm); For Complete Dimensions, See page 81
Dry Weight777 lbs (352 kg)
Filled Weight (Spa Volume)4,488 lbs (2,036 kg)
Filled Weight (Average Fill)3,654 lbs (1,306 kg)
Water Capacity (Spa Volume)445 US gallons (1,685 Liters)
Water Capacity (Average Fill)345 US gallons (1,306 Liters)
Electronic ControlsSolid state electronic touchscreen controls, programmable temperature, filtration, and heat cycles
Pump 1North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous
Pump 2North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous
Circulation PumpYes, 8-hour
HeaterNorth America (60 Hz): 5.5kW High Flow Export (50 Hz)2.7kW High Flow
Total PowerPro® Jets41
Seat A Jets4 PowerPro® FX, 2 PowerPro® FX Large Rotational, 2 PowerPro® FX Small
Seat B Jets2 PowerPro® FX
Seat C Jets3 PowerPro® MX, 2 PowerPro® FX Rotational, 2 PowerPro® FX Small
Seat D Jets1 PowerPro® FX Large Rotational
Seat E Jets (Standard model)10 PowerPro® FX, 2 PowerPro® FX Small
Seat E Jets (optional IR Therapy)8 PowerPro® FX, 2 IR Therapy Lights, 2 PowerPro® FX Small
Seat E HYDROSOOTHE™ Jets2 PowerPro® FX Directional with independent flow rate valve
Seat F Jets2 PowerPro® FX Large, 2 PowerPro® FX Rotational, 2 PowerPro® FX, 2 PowerPro® FX Small
Footwell (G)8 PowerPro® FX Small, 1 PowerPro® FX
Massage Selectors2
Air Controls4, On/Off rocker style
Water Management SystemTwo 60 ft ² filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1; Factory installed ClearRay Active Oxygen® System; Optional True™ Water System (Must order with SmartTub® option) Export (50 Hz): ClearRay® UV-C System
LED LightingOne underwater light with 4 color modes, one colored waterfall light, cup holders, 2 HYDROSOOTHE pillow lights, and exterior lights
ProFinish™ Cabinet ColorsModern Hardwood, Brushed Gray, and Smoked Ebony
Acrylic ColorsPlatinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
Headrests4
WaterfallOne independent flow rate (on or off) adjustment; powered by the circulation pump
Heater:North America (60 Hz): 5.5 kW, High Flow Export (50 Hz): High Flow, 2.7 kW
Electrical Requirements:North America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 220-240 VAC@1x32A, 1x20A/1x16A, 3x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.
Warranty*North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo
Special Features (Optional)SmartTub® Module (Must order with the True™ Water System), 2 IR Therapy Lights
Audio System (Optional)BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers and subwoofer

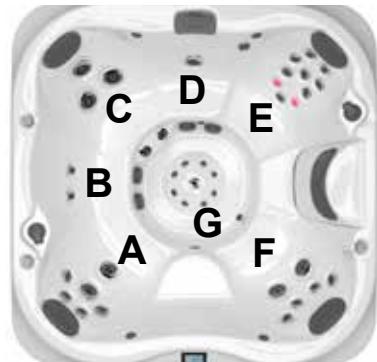


Shown with the optional
IR Therapy Lights

Jacuzzi J-345

Operation/Seat Depths

Note: Shown with the optional IR Therapy Lights

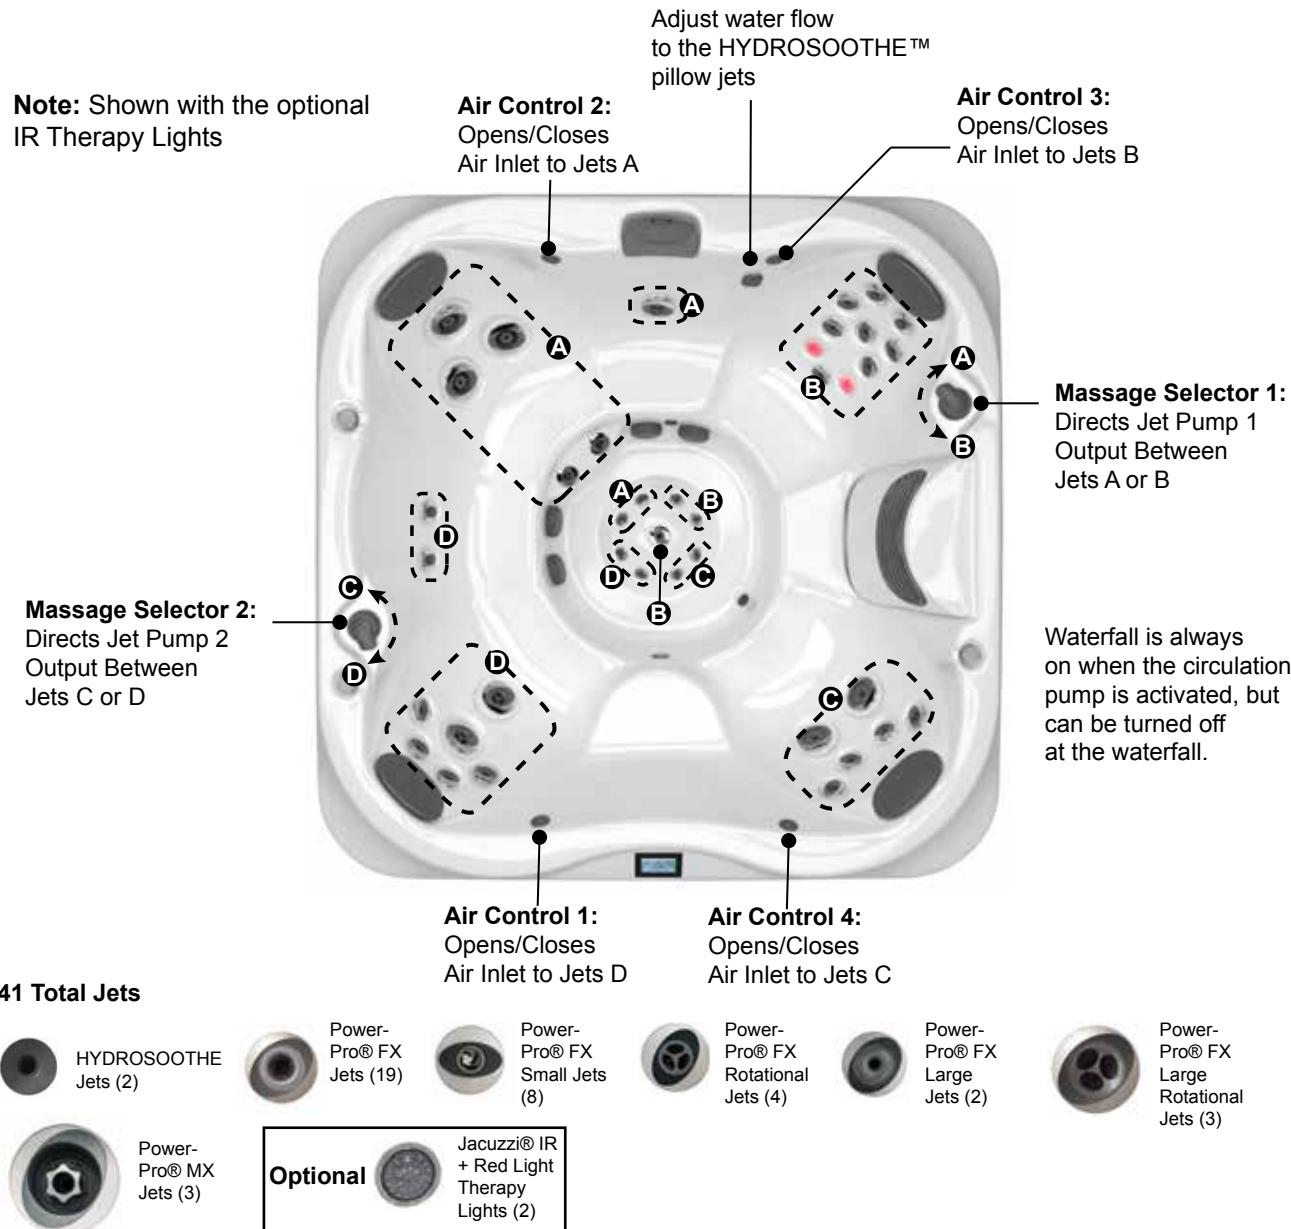

Spa Operation Subject to Change without Notice

Seat Depths

- | | |
|-----------------------------|-----------------------------|
| A = 25.25" (64.1 cm) | F = 25.13" (63.8 cm) |
| B = 25.25" (64.1 cm) | G = 16.75" (42.5 cm) |
| C = 25.13" (63.8 cm) | H = 33.50" (85.1 cm) |
| D = 23.50" (59.7 cm) | |
| E = 28.50" (72.4 cm) | |

- | | |
|-----------------------------|-----------------------------|
| A = 25.25" (64.1 cm) | F = 25.13" (63.8 cm) |
| B = 25.25" (64.1 cm) | G = 16.75" (42.5 cm) |
| C = 25.13" (63.8 cm) | H = 33.50" (85.1 cm) |
| D = 23.50" (59.7 cm) | |
| E = 28.50" (72.4 cm) | |

Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance $\pm 0.5"$ (1.27 cm).




Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-345

Dimensions


TOP VIEW

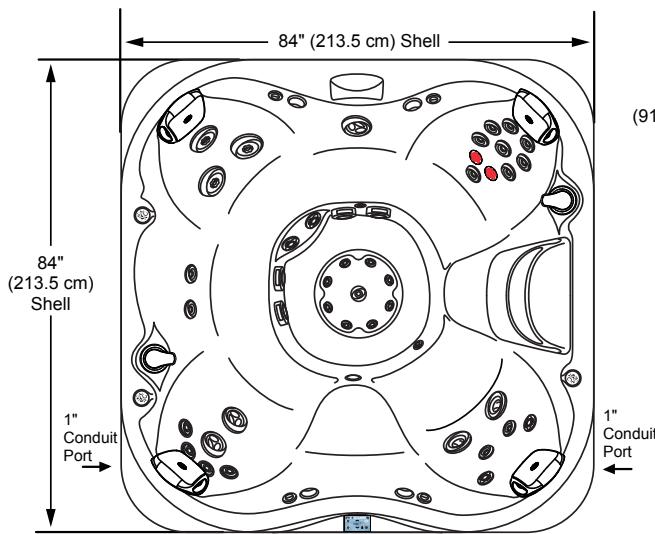


FRONT

Equipment Bay/Pump Access
ClearRay Active Oxygen,
Optional BLUEWAVE,
and Optional SmartTub Module
behind skirt panels

FRONT/BACK VIEW

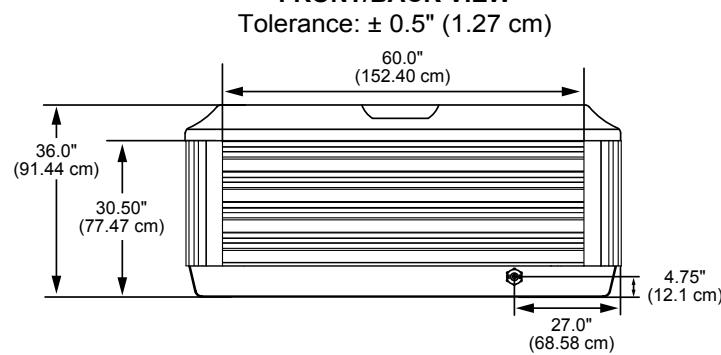


LEFT SIDE VIEW

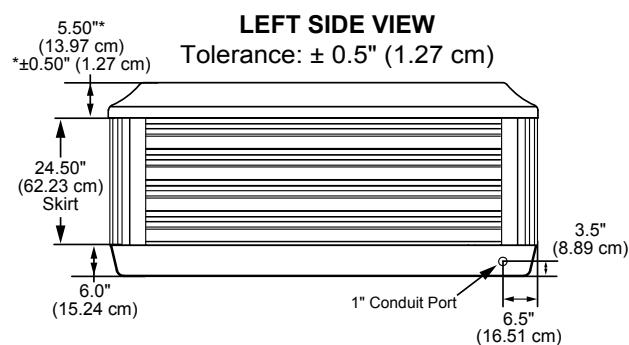

STOP


IMPORTANT! Always measure each hot tub
for exact dimensions BEFORE designing its
foundational support and/or decking.

STOP

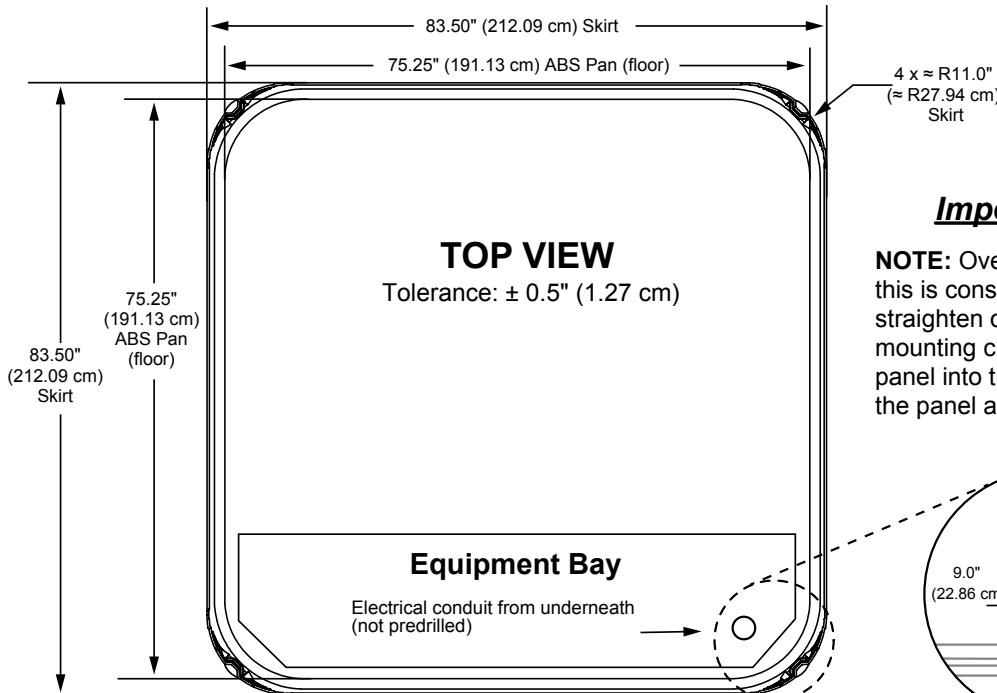

Important Panel Details

NOTE: Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.



From the edge of
the ABS pan

Dimensions/specifications subject to change without notice. Tolerance ±0.5" (1.27 cm)

Jacuzzi J-335

Specifications

Seating Capacity5-6 Adults
Dimensions84" x 84" x 36" (213.5 cm x 213.5 cm x 91.44 cm); For Complete Dimensions, See page 81
Dry Weight764 lbs (347 kg)
Filled Weight (Spa Volume)4,684 lbs (2,125 kg)
Filled Weight (Average Fill)3,683 lbs (1,671 kg)
Water Capacity (Spa Volume)450 US gallons (1,703 Liters)
Water Capacity (Average Fill)350 US gallons (1,325 Liters)
Electronic ControlsSolid state electronic touchscreen controls, programmable temperature, filtration, and heat cycles
Pump 1North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous
Pump 2North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous
Circulation PumpYes, 8-hour
HeaterNorth America (60 Hz): 5.5 kW High Flow Export (50 Hz): 2.7 kW High Flow
Total PowerPro® Jets42
Seat A Jets2 PowerPro® FX Large Rotational
Seat B Jets4 PowerPro® FX, 1 PowerPro® FX Large Rotational, 12 PowerPro® BX
Seat C Jets1 PowerPro® FX Large Rotational
Seat D Jets (Standard model)10 PowerPro® FX, 2 PowerPro® FX Rotational
Seat D Jets (optional IR Therapy)8 PowerPro® FX, 2 IR Therapy Lights, 2 PowerPro® FX Rotational
Seat D HYDROSOOTHE™ Jets2 PowerPro® FX Directional with independent flow rate valve
Seat E Jets2 PowerPro® FX, 2 PowerPro® FX Rotational, 2 PowerPro® FX Large
Footwell (F)2 PowerPro® MX
Massage Selectors2
Air Controls3, On/Off rocker style
Water Management SystemTwo 60 ft ² filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1; Factory installed ClearRay Active Oxygen® System; Optional True™ Water System (Must order with SmartTub® option) Export (50 Hz): ClearRay® UV-C System
LED LightingOne underwater light with 4 color modes, one colored waterfall light, cup holders, 2 HYDROSOOTHE pillow lights, and exterior lights
ProFinish™ Cabinet ColorsModern Hardwood, Brushed Gray, and Smoked Ebony
Acrylic ColorsPlatinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
Headrests4
WaterfallOne independent flow rate (on or off) adjustment; powered by the circulation pump
Heater:North America (60 Hz): 5.5 kW, High Flow Export (50 Hz): High Flow, 2.7 kW
Electrical Requirements:North America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 220-240 VAC@1x32A, 1x20A/1x16A, 3x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.
Warranty*North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo
Special Features (Optional)SmartTub® Module (Must order with the True™ Water System), 2 IR Therapy Lights
Audio System (Optional)BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers and subwoofer

*(See Warranty Document for Specific Details)


Dimensions/Specifications are Subject to Change Without Notice



Show with the optional
IR Therapy Lights

Jacuzzi J-335

Operation/Seat Depths

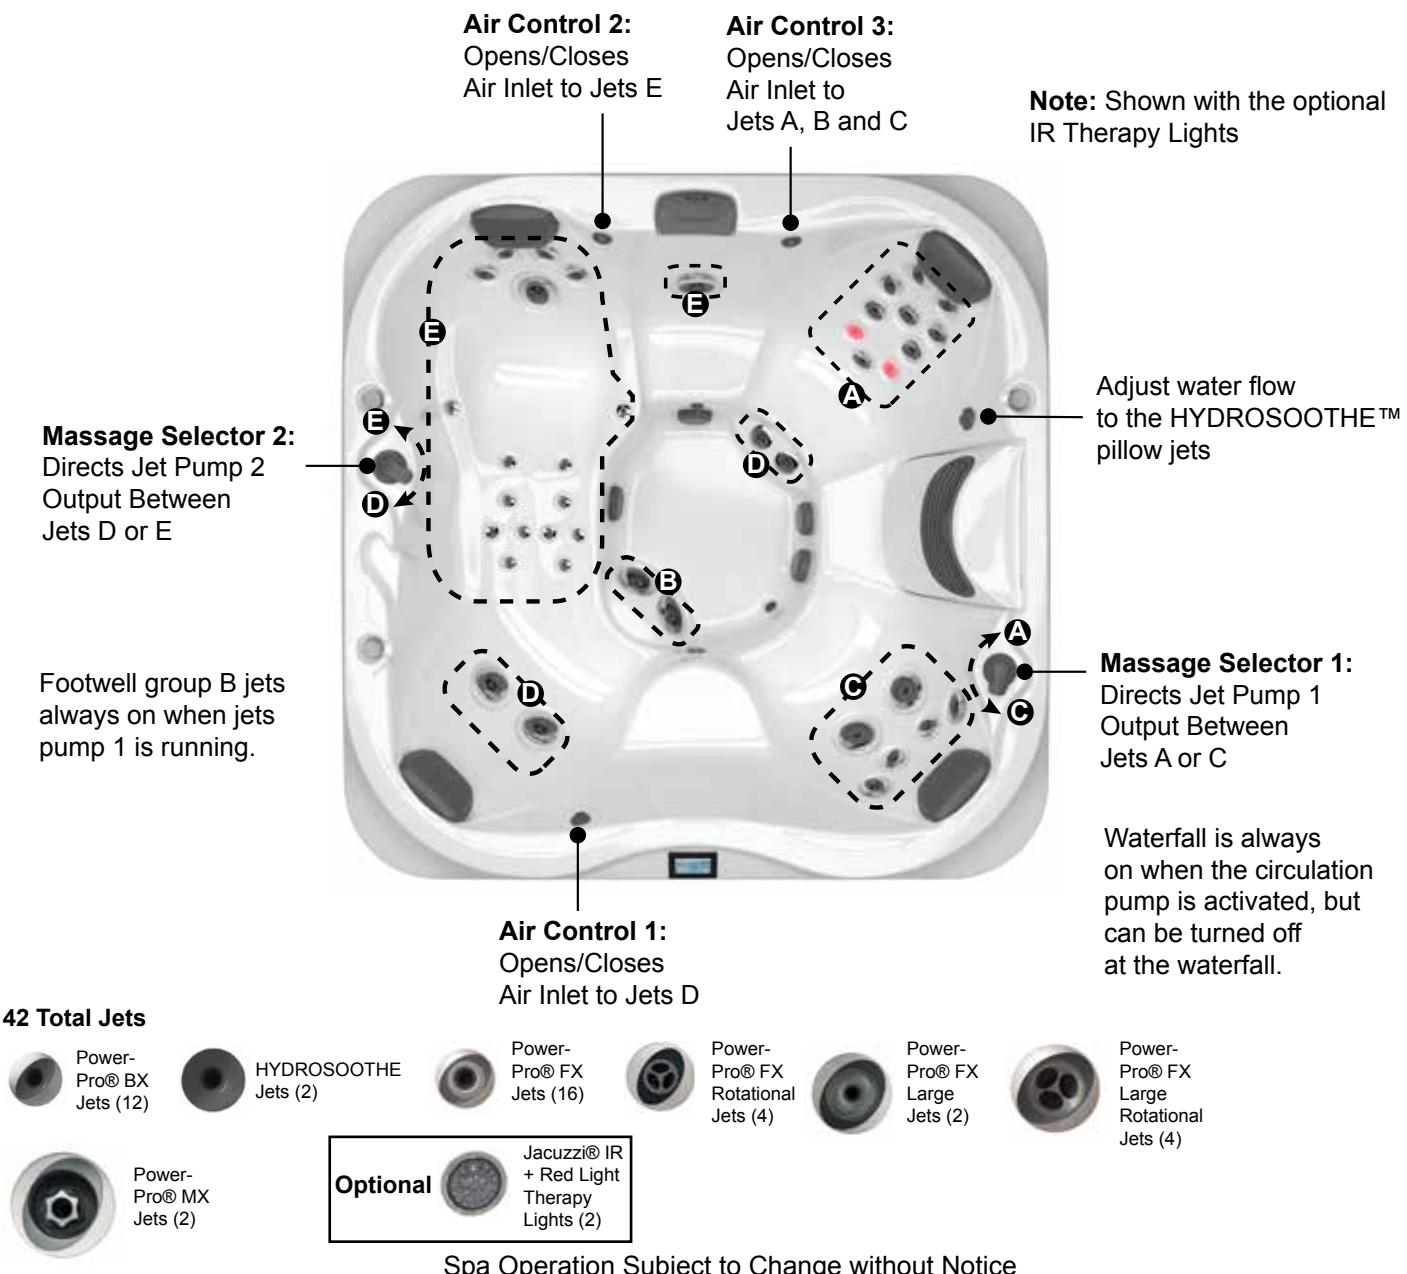

A = 25.75" (65.4 cm)
B = 27.50" (69.9 cm)
C = 23.50" (59.7 cm)
D = 28.25" (71.8 cm)
E = 22.75" (57.8 cm)

F = 25.50" (64.8 cm)
G = 16.75" (42.5 cm)
H = 33.50" (85.1 cm)





Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance \pm 0.5" (1.27 cm).



Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-335


Dimensions

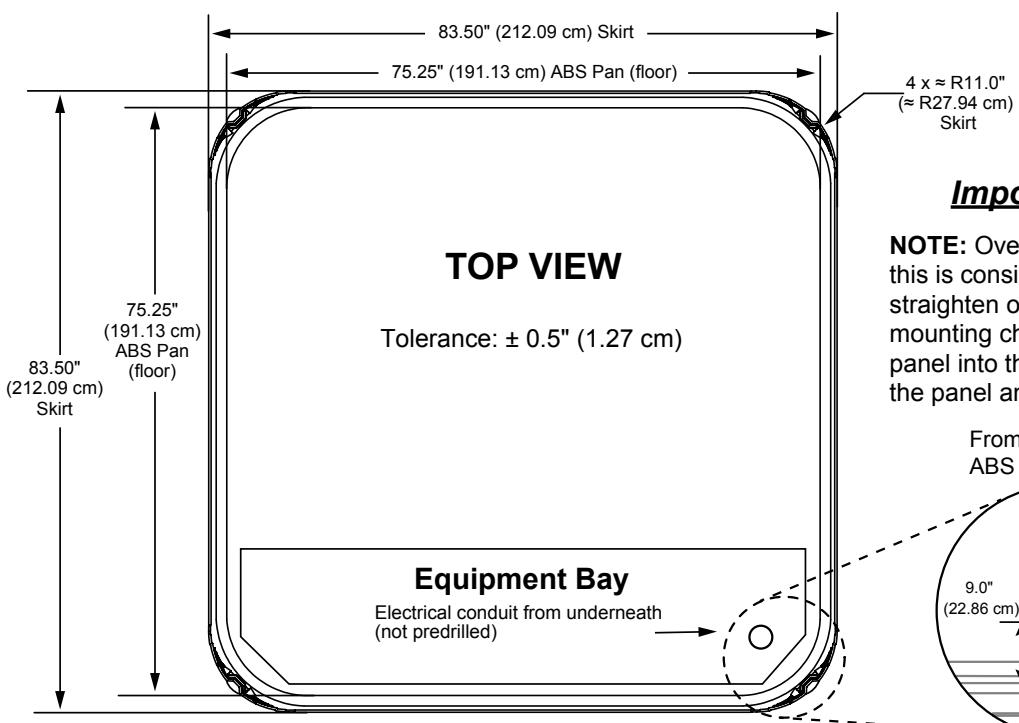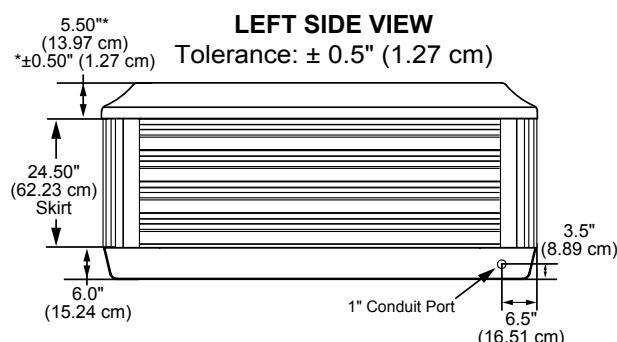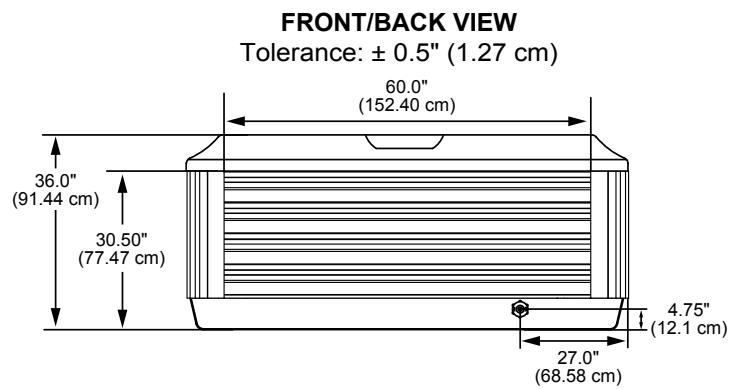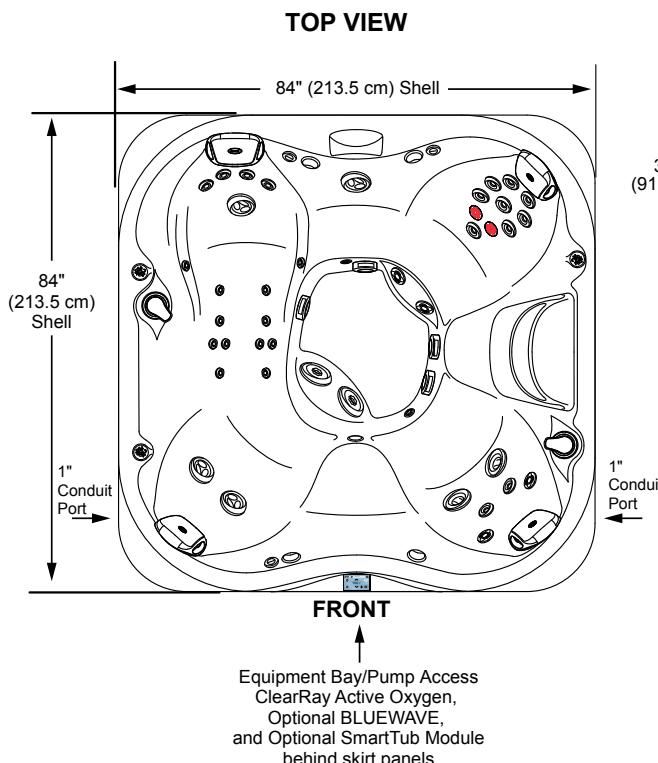

Important Panel Details

NOTE: Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

From the edge of the ABS pan




Dimensions/specifications subject to change without notice. Tolerance $\pm 0.5"$ (1.27 cm)

Jacuzzi J-325


Specifications

Seating Capacity	4-5 Adults
Dimensions	84" x 76" x 33.50" (213.5 cm x 193 cm x 85.09 cm); For Complete Dimensions, See page 81
Dry Weight	619 lbs (281 kg)
Filled Weight (Spa Volume)	4,372 lbs (1,983 kg)
Filled Weight (Average Fill)	3,413 lbs (1,548 kg)
Water Capacity (Spa Volume)	450 US gallons (1,703 Liters)
Water Capacity (Average Fill)	335 US gallons (1,268 Liters)
Electronic Controls	Solid state electronic touchscreen controls, programmable temperature, filtration, and heat cycles
Pump 1 (Convertible)	North America (60 Hz): 1-Speed, 2.5 HP brake, 1.5 HP continuous, 56 Frame
(3-Wire 240V)	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame
Export (50 Hz):	1-Speed, 2.0 HP continuous
Circulation Pump	Yes, 8-hour
Heater (Convertible)	North America (60 Hz): 1 kW/4.0 kW Low Flow
(3-Wire 240V)	North America (60 Hz): 4.0 kW Low Flow
Export (50 Hz)	2.7 kW Low Flow
Total PowerPro® Jets	23
Seat A Jets	2 PowerPro® FX, 2 PowerPro® FX Rotational, 2 PowerPro® FX Large
Seat B Jets	1 PowerPro® FX Large Rotational, 2 PowerPro® FX Large
Seat C Jets	4 PowerPro® FX, 2 PowerPro® FX Large Rotational
Seat C HYDROSOOTHE™ Jets	2 PowerPro® FX Directional with independent flow rate valve
Seat D Jets	2 PowerPro® FX Large Rotational
Footwell (E)	4 PowerPro® FX Small
Massage Selectors	1
Air Controls	4, On/Off rocker style
Water Management System	Two 60 ft ² filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1; Factory installed ClearRay Active Oxygen® System; Optional True™ Water System (Must order with SmartTub® option)
Export (50 Hz):	ClearRay® UV-C System
LED Lighting	One underwater light with 4 color modes, one colored waterfall light, 2 HYDROSOOTHE pillow lights, and exterior light
ProFinish™ Cabinet Colors	Modern Hardwood, Brushed Gray, and Smoked Ebony
Acrylic Colors	Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
Headrests	4
Waterfall	One independent flow rate (on or off) adjustment; powered by the circulation pump
Heater:	North America (60 Hz): Convertible: 1kW/4kW; 3-Wire 240V 5.5 kW, High Flow
Export (50 Hz):	High Flow, 2.7 kW
Electrical Requirements:	North America (60 Hz): Convertible 120 VAC@15A or 240 VAC@30A, 40A, North America (60 Hz): 3-Wire 240V@30A, 40A
	Export (50 Hz): 220-240 VAC@1x16A or 2x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD Breakers are required for this configuration.
Warranty*	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo
Special Features (Optional)	SmartTub® Module (Must order with the True™ Water System)
Audio System (Optional)	BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers and subwoofer

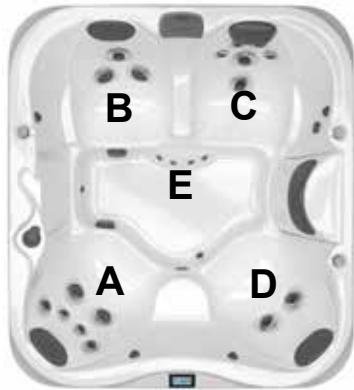

Jacuzzi J-325

Operation/Seat Depths

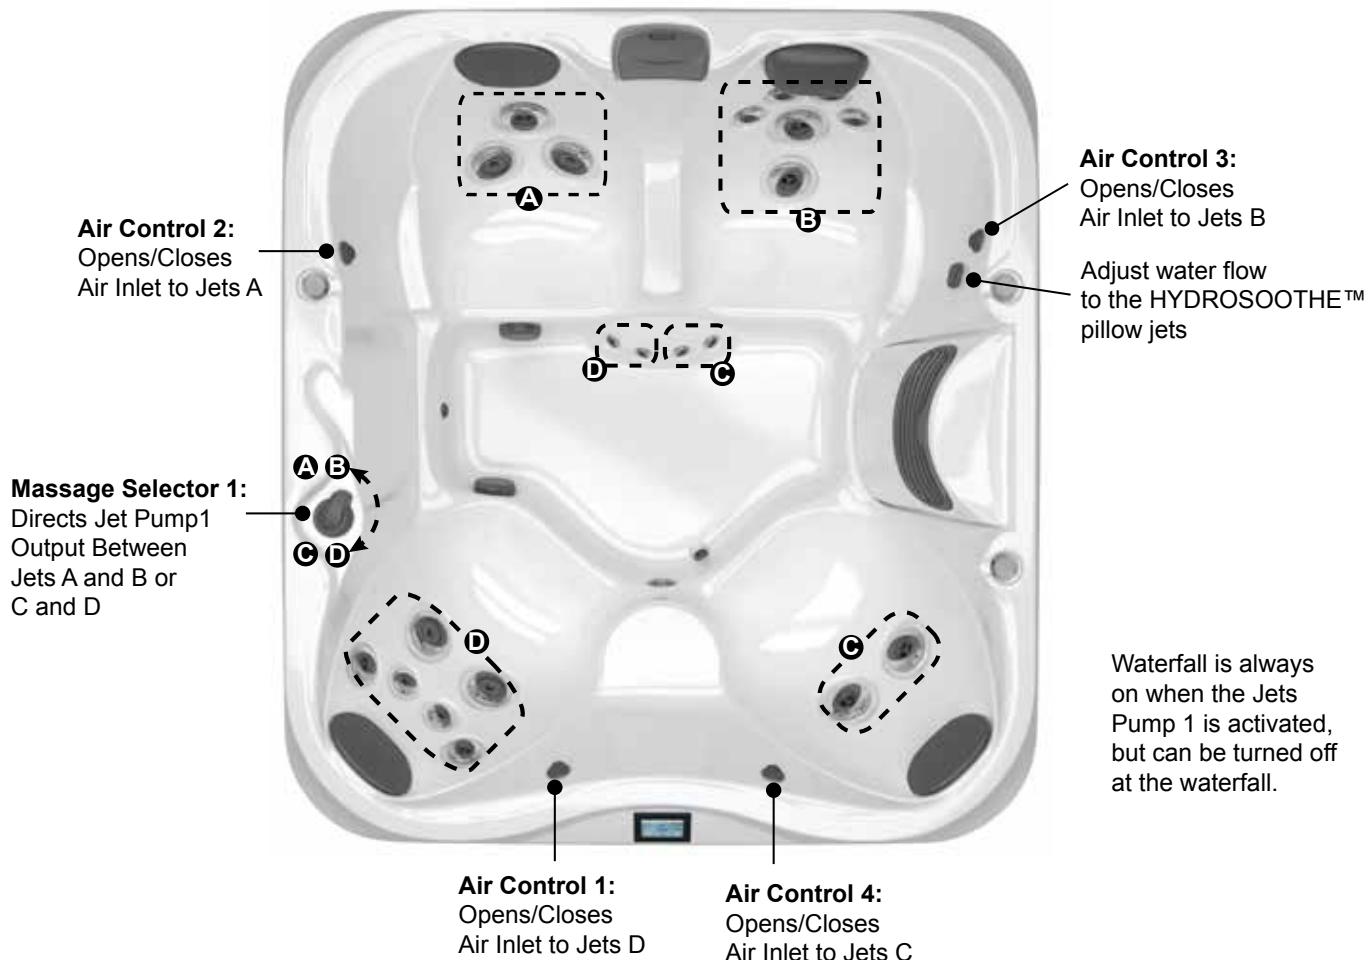

23 Total Jets




Spa Operation Subject to Change without Notice

Seat Depths

- A = 27.38" (69.5 cm)**
- B = 27.38" (69.5 cm)**
- C = 27.38" (69.5 cm)**
- D = 25.75" (65.4 cm)**
- E = 16.63" (42.2 cm)**
- F = 31.25" (79.4 cm)**





Listed dimensions represent distance from top of acrylic to lowest point in seat.
Tolerance $\pm 0.5"$ (1.27 cm).

Dimensions/Specifications are Subject to Change Without Notice

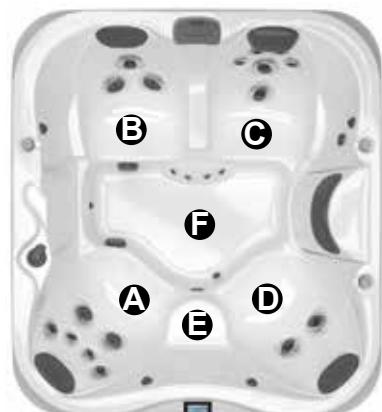

Jacuzzi J-325

Dimensions

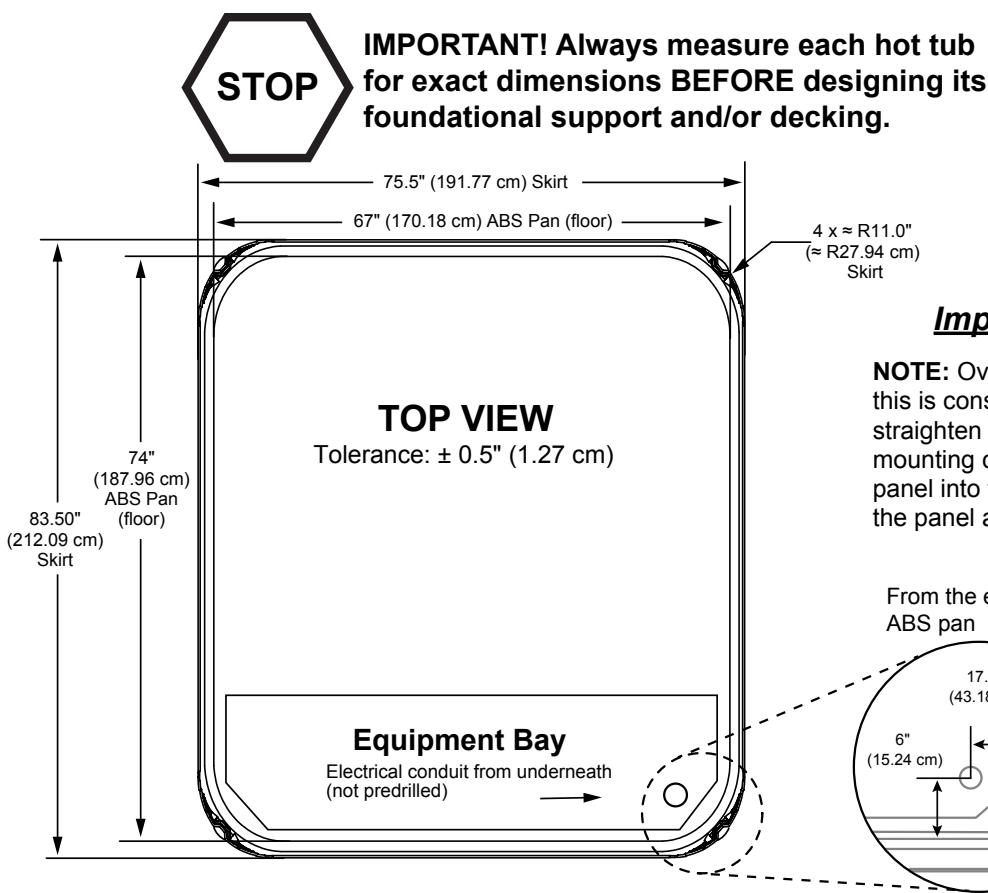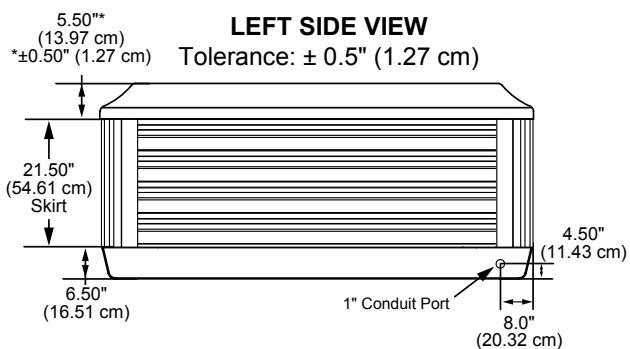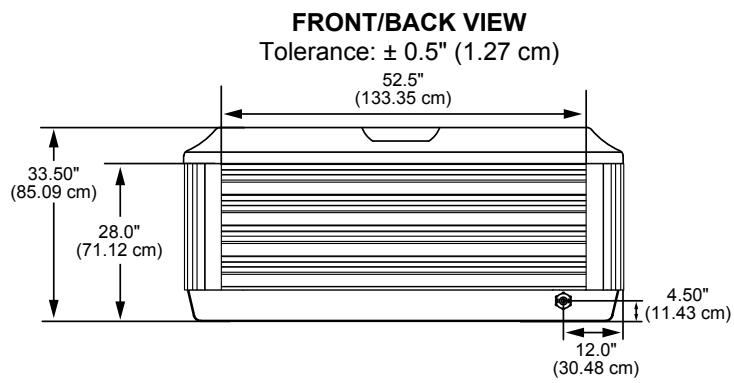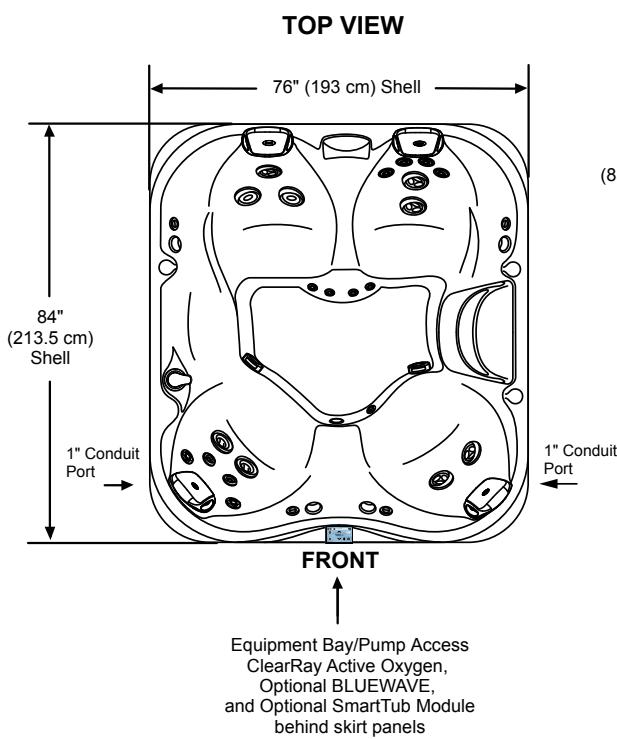

Important Panel Details


NOTE: Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

Dimensions/specifications subject to change without notice. Tolerance $\pm 0.5"$ (1.27 cm)

Jacuzzi J-315


Specifications

Seating Capacity2-3 Adults
Dimensions66" x 76" x 31.75" (168 cm x 193 cm x 80.65 cm); For Complete Dimensions, See page 81
Dry Weight531 lbs (241 kg)
Filled Weight (Spa Volume)2,866 lbs (1,300 kg)
Filled Weight (Average Fill)2,282 lbs (1,035 kg)
Water Capacity (Spa Volume)280 US gallons (1,060 Liters)
Water Capacity (Average Fill)210 US gallons (795 Liters)
Electronic ControlsSolid state electronic touchscreen controls, programmable temperature, filtration, and heat cycles
Pump 1 (Convertible)North America (60 Hz): 1-Speed, 2.5 HP brake, 1.5 HP continuous, 56 Frame (3-Wire 240V)North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous
Circulation PumpYes, 8-hour
Heater (Convertible)North America (60 Hz): 1 kW/4.0 kW Low Flow (3-Wire 240V)North America (60 Hz): 4.0 kW Low Flow Export (50 Hz) 2.7 kW Low Flow
Total PowerPro® Jets23
Seat A Jets2 PowerPro® FX Rotational, 2 PowerPro® FX
Seat B Jets6 PowerPro® FX, 2 PowerPro® FX Large Rotational, 6 PowerPro® BX
Seat B HYDROSOOTHE™ Jets2 PowerPro® FX Directional with independent flow rate valve
Seat C Jets1 PowerPro® FX Large Rotational, 2 PowerPro® FX Large Rotational
Massage Selectors1
Air Controls3, On/Off rocker style
Water Management SystemTwo 60 ft ² filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1; Factory installed ClearRay Active Oxygen® System; Optional True™ Water System (Must order with SmartTub® option) Export (50 Hz): ClearRay® UV-C System
LED LightingOne underwater light with 4 color modes, one colored waterfall light, 2 HYDROSOOTHE pillow lights, and exterior lights
ProFinish™ Cabinet ColorsModern Hardwood, Brushed Gray, and Smoked Ebony
Acrylic ColorsPlatinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
Headrests3
WaterfallOne independent flow rate (on or off) adjustment; powered by the circulation pump
Heater:North America (60 Hz): Convertible: 1kW/4kW; 3-Wire 240V 5.5 kW, High Flow Export (50 Hz): High Flow, 2.7 kW
Electrical Requirements:North America (60 Hz): Convertible 120 VAC@15A or 240 VAC@30A, 40A North America (60 Hz): 3-Wire 240V@30A, 40A Export (50 Hz): 220-240 VAC@1x16A, or 2x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.
Warranty*North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo
Special Features (Optional)SmartTub® Module (Must order with the True™ Water System)
Audio System (Optional)BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers and subwoofer

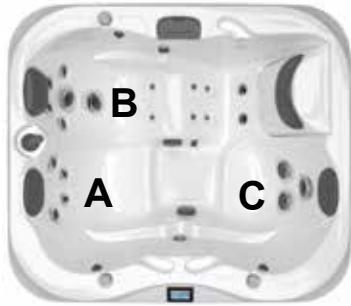

Jacuzzi J-315

Operation/Seat Depths

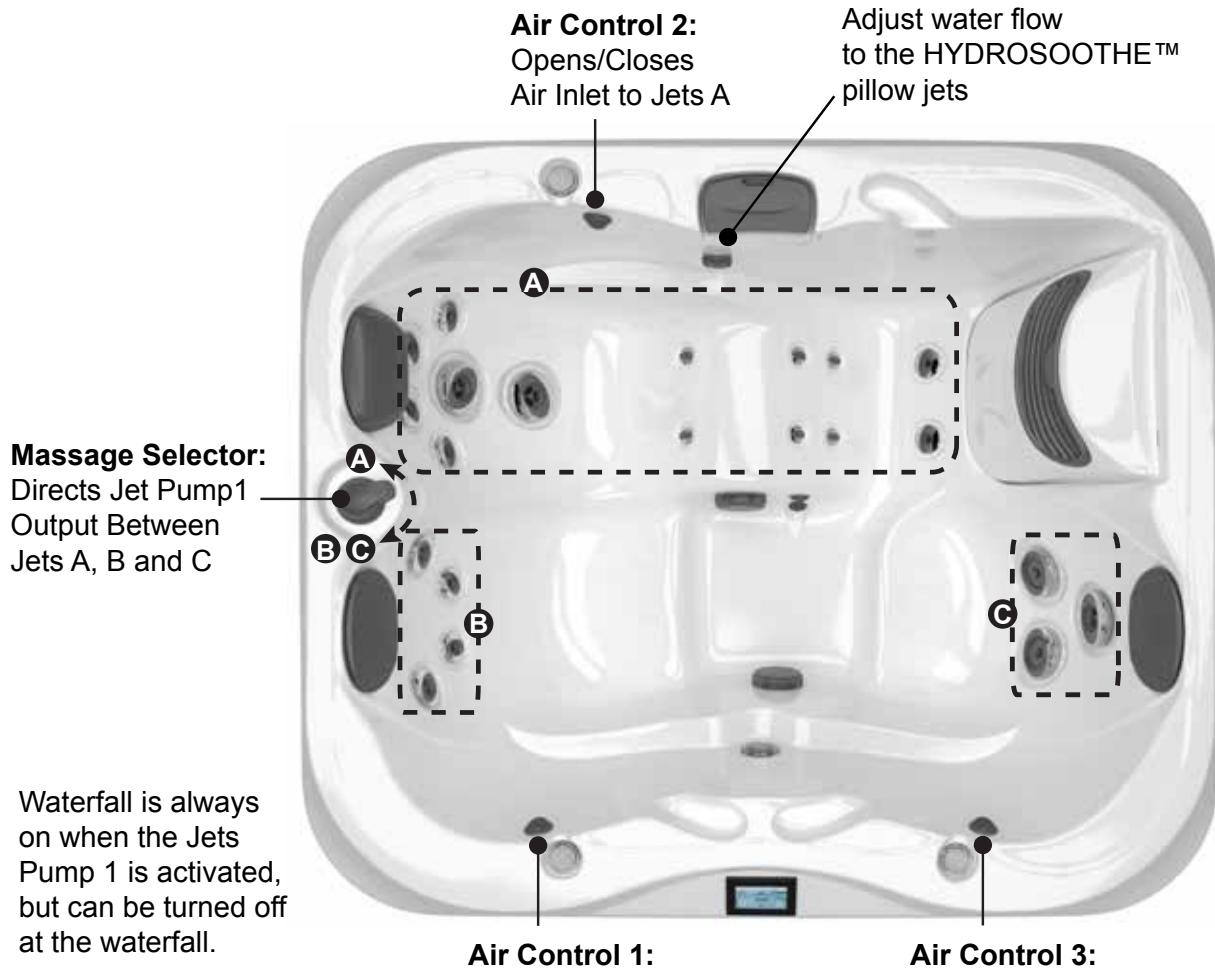

23 Total Jets




Spa Operation Subject to Change without Notice

Seat Depths

- A = 27.50" (69.9 cm)**
- B = 26.25" (66.7 cm)**
- C = 27.88" (70.8 cm)**
- D = 26.75" (69.4 cm)**
- E = 27.50" (69.9 cm)**


Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance $\pm 0.5"$ (1.27 cm).

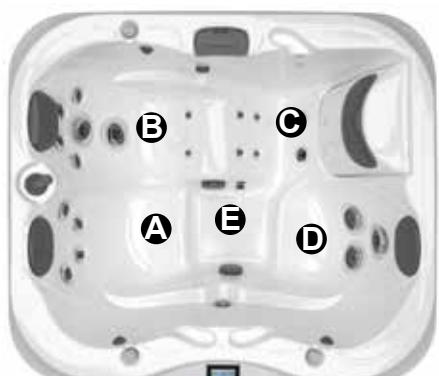

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-315

Dimensions

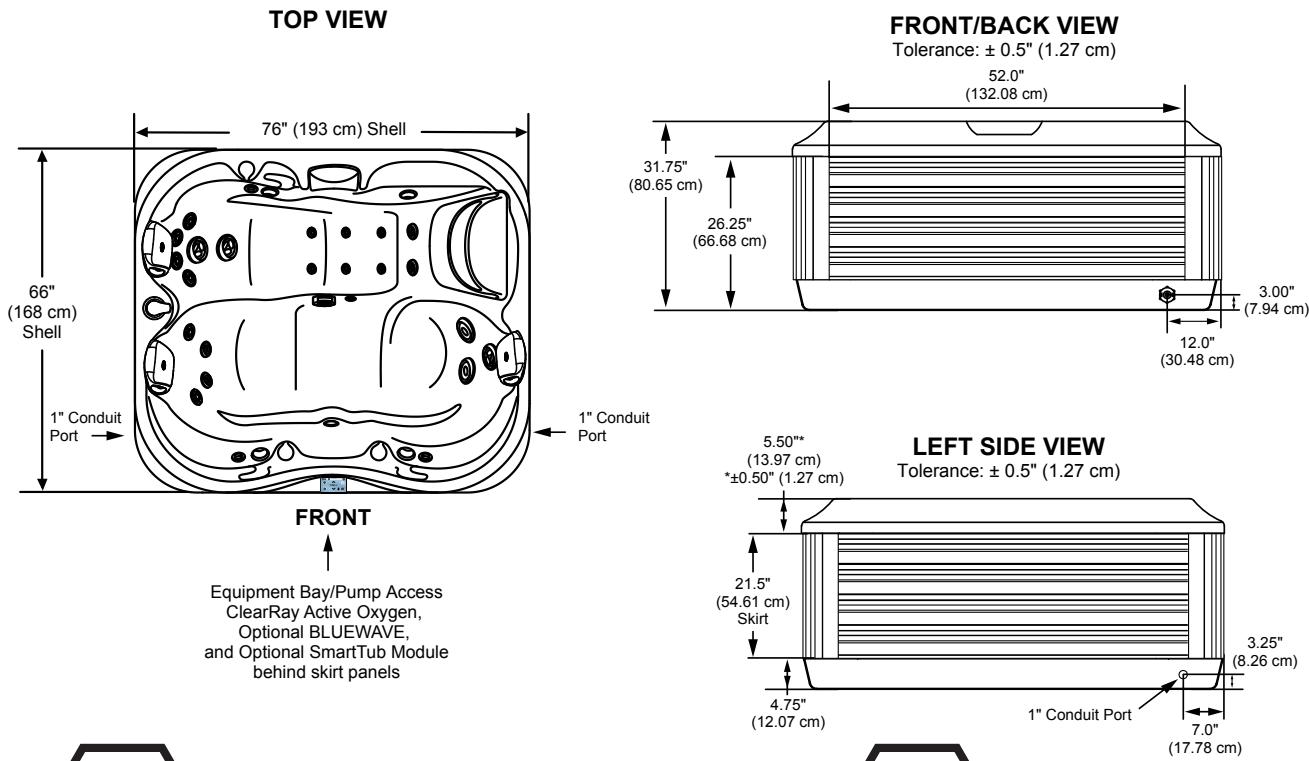


IMPORTANT! Always measure each hot tub
for exact dimensions BEFORE designing its
foundational support and/or decking.



Important Panel Details

NOTE: Over time the panel(s) may bow, this is considered normal.
The panels will straighten out when reinstalled into the mounting
channel. Place one end of the panel into the channel first then flatten
the panel and insert the other end.

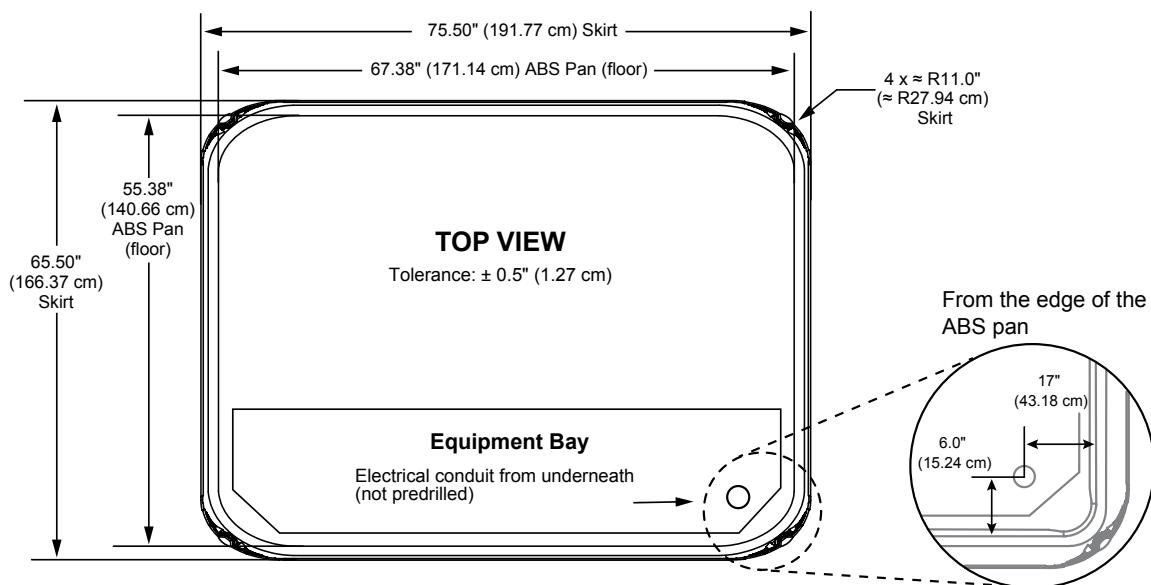

Dimensions/specifications subject to change without notice. Tolerance $\pm 0.5"$ (1.27 cm)

Jacuzzi J-285

Specifications

Seating Capacity 6-7 Adults
Dimensions 89" x 89" x 36" (226 cm x 226 cm x 91 cm); For Complete Dimensions, See page 82
Dry Weight 777 lbs (352 kg)
Filled Weight (Spa Volume) 4,905 lbs (2,225 kg)
Filled Weight (Average Fill) 3,821 lbs (1,733 kg)
Water Capacity (Spa Volume)	... 495 US gallons (1,874 Liters)
Water Capacity (Average Fill)	... 365 US gallons (1,382 Liters)
Electronic Controls Solid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles
Pump 1 North America (60 Hz): 2-Speed, 4.5 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz): 2-Speed, 2.0 HP continuous
Pump 2 North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous
Circulation Pump No
Total Jets 42
Seat A Jets 2 SL Directional, 4 SL3R Rotational
Seat B Jets 2 SL5 Directional
Seat C Jets 2 SL Directional, 1 SL3 Directional, 8 SLR Rotational
Seat D Jets 1 SL5 Directional
Seat E Jets 2 SL Directional, 6 SL3 Directional
Seat F Jets 4 SL3R Rotational, 2 SL5R Rotational
Footwell (G) 8 SL Directional
Massage Selectors None
Air Controls 2
Water Management System One 50 ft ² filter cartridge on jets pump 1, ClearRay Active Oxygen® System Export (50 Hz): ClearRay® UV-C System
LED Lighting LED Lighting System (Interior Surround); Standard Exterior Light
Cabinet Colors Smoked, Charcoal
Acrylic Colors Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
Headrests 4
Waterfall One independent flow rate (on or off) adjustment; powered by the pump 1
Heater: North America (60 Hz): 5.5 kW, High Flow Export (50 Hz): High Flow, 2.7 kW
Electrical Requirements: North America (60 Hz): 240 VAC@40A, 50A or 60A Export (50 Hz): 220-240 VAC@1x16A, 1x32A or 2 out of 3-phase (see manual) or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.
Warranty* North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets
Special Features (Optional) SmartTub® Module
Audio System (Optional) N/A



Jacuzzi J-285

Operation/Seat Depths



Group A Jets are always on when Pump 1 is running.

Group B Jets are always on when Pump 2 is running.

42 Total Jets




Spa Operation Subject to Change without Notice

Seat Depths

A = 26.00" (66.04 cm)
B = 21.75" (55.25 cm)
C = 25.00" (63.50 cm)
D = 21.63" (54.93 cm)
E = 27.00" (68.58 cm)
F = 18.00" (45.72 cm)

G = 23.25" (59.06 cm)
H = 17.25" (43.82 cm)
I = 30.00" (76.20 cm)

Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance $\pm 0.5"$ (1.27 cm).

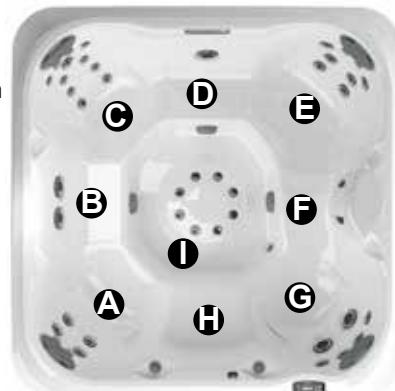


Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-285


Dimensions

Top View

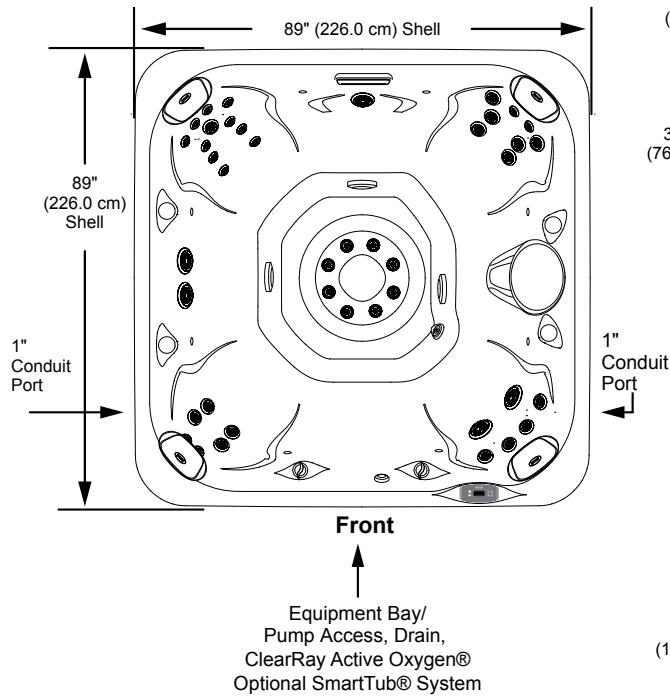


FRONT VIEW

Tolerance: $\pm 0.5"$ (1.27 cm)

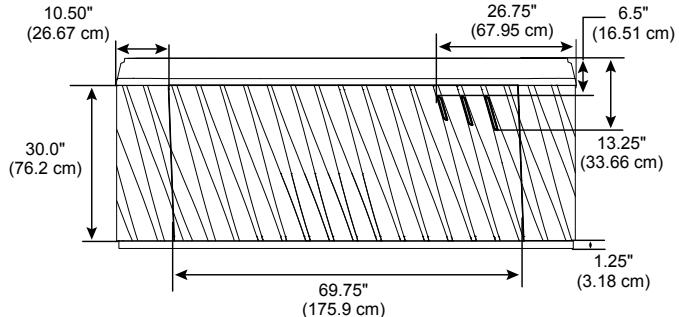

RIGHT SIDE VIEW


Tolerance: $\pm 0.5"$ (1.27 cm)

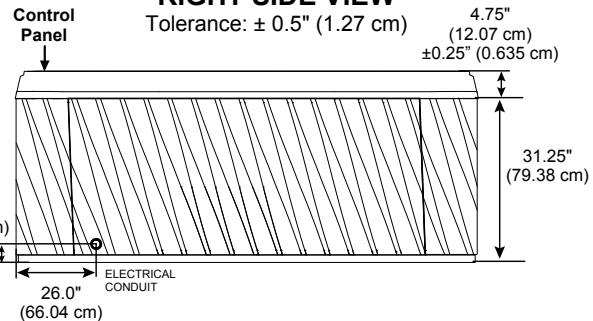

IMPORTANT! Always measure each hot tub
for exact dimensions BEFORE designing its
foundational support and/or decking.



Cabinet Radius:
 $\approx 10.0"$ (20.32 cm)

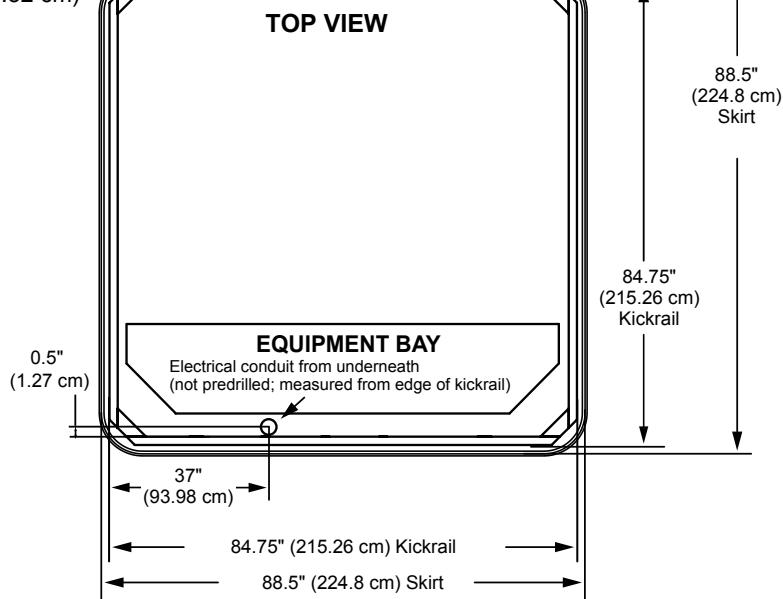


Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/specifications subject to change without notice. Tolerance $\pm 0.5"$ (1.27 cm)

Jacuzzi J-275


Specifications

Seating Capacity	6 Adults
Dimensions	89" x 89" x 36" (226 cm x 226 cm x 91 cm); For Complete Dimensions, See page 82
Dry Weight	774 lbs (351 kg)
Filled Weight (Spa Volume)	4,861 lbs (2,205 kg)
Filled Weight (Average Fill)	3,776 lbs (1,713 kg)
Water Capacity (Spa Volume)	490 US gallons (1,855 Liters)
Water Capacity (Average Fill)	360 US gallons (1,363 Liters)
Electronic Controls	Solid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles
Pump 1	North America (60 Hz): 2-Speed, 4.5 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz): 2-Speed, 2.0 HP continuous
Pump 2	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous
Circulation Pump	No
Total Jets	38
Seat A Jets	4 SL3R Rotational, 2 SL5R Rotational
Seat B Jets	2 SL3R Rotational
Seat C Jets	6 SL Directional, 8 SL3 Directional, 2 SLR Rotational
Seat D Jet	1 SL5 Directional
Seat E Jets	8 SL Directional, 2 SLR Rotational, 1 SL3 Directional
Footwell (F)	2 SL3 Directional
Massage Selectors	None
Air Controls	2
Water Management System	One 50 ft ² filter cartridge on jets pump 1, ClearRay Active Oxygen® System Export (50 Hz): ClearRay® UV-C System
LED Lighting	LED Lighting System (Interior Surround); Standard Exterior Light
Cabinet Colors	Smoked, Charcoal
Acrylic Colors	Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
Headrests	3
Heater:	North America (60 Hz): 5.5 kW, High Flow
Waterfall	One independent flow rate (on or off) adjustment; powered by the pump 1 Export (50 Hz): High Flow, 2.7 kW
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A or 60A Export (50 Hz): 230 VAC@1x16A, 1x32A or 2 out of 3-phase (see manual) or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.
Warranty*	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets
Special Features (Optional)	SmartTub® Module
Audio System (Optional)	N/A

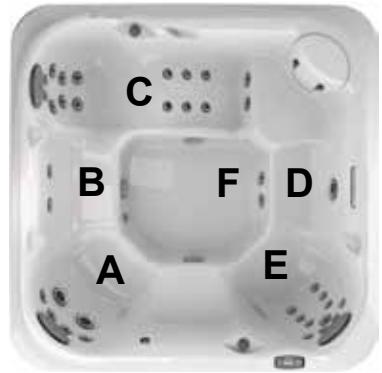

Jacuzzi J-275

Operation/Seat Depths

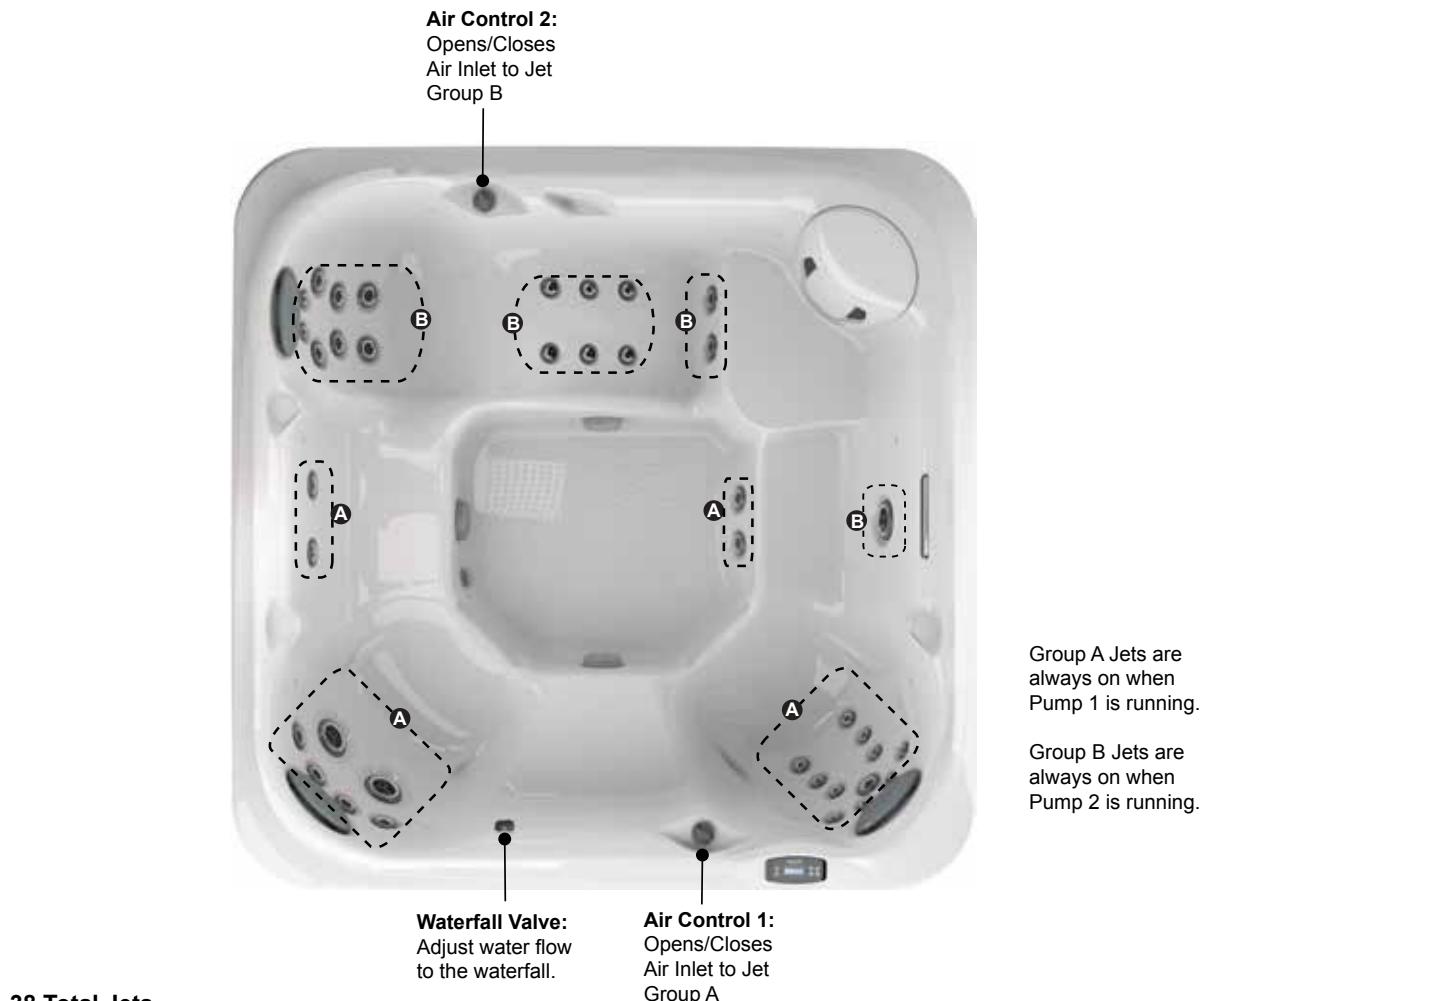

38 Total Jets




Spa Operation Subject to Change without Notice

Seat Depths

A = 24.50" (62.23 cm)
B = 21.50" (54.61 cm)
C = 24.75" (62.87 cm)
D = 25.50" (64.77 cm)
E = 17.50" (44.45 cm)
F = 21.38" (54.29 cm)

G = 25.75" (65.41 cm)
H = 17.25" (43.82 cm)
I = 30.00" (76.20 cm)

Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance $\pm 0.5"$ (1.27 cm).

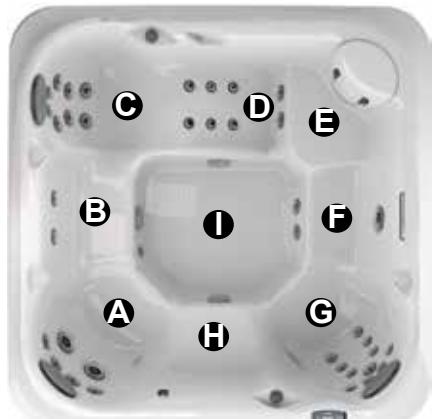


Dimensions/Specifications are Subject to Change Without Notice


Jacuzzi J-275

Dimensions


Top View

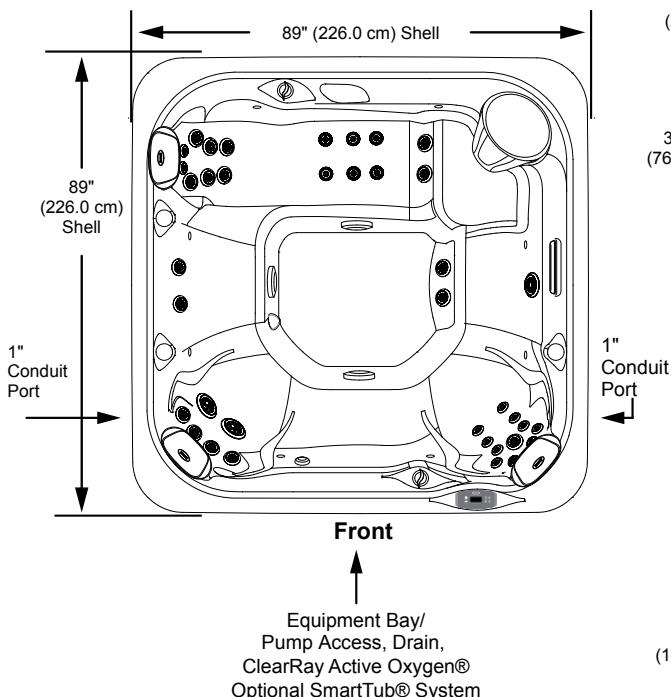

FRONT VIEW

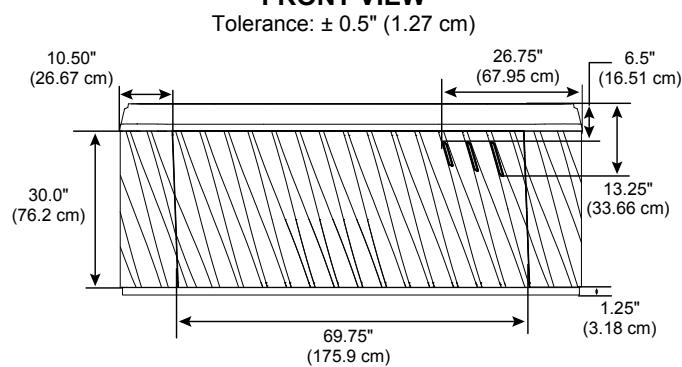

RIGHT SIDE VIEW

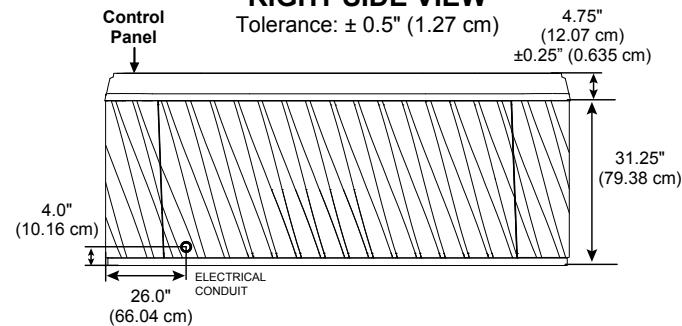


STOP

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

STOP

Cabinet Radius:
 $\approx 10.0"$ (20.32 cm)

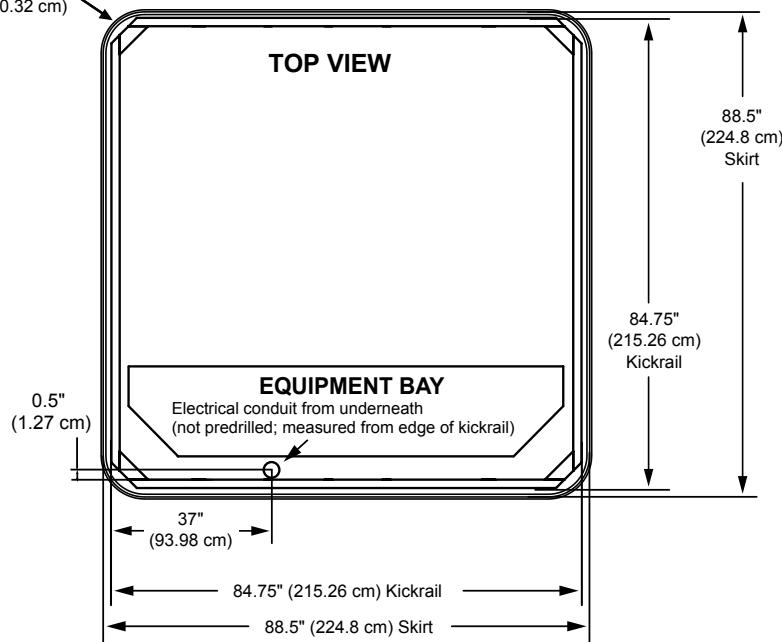

Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/specifications subject to change without notice. Tolerance $\pm 0.5"$ (1.27 cm)

Jacuzzi J-245

Specifications

Seating Capacity6-7 Adults
Dimensions84" x 84" x 36" (213 cm x 213 cm x 91 cm); For Complete Dimensions, See page 82
Dry Weight717 lbs (325 kg)
Filled Weight (Spa Volume)4,345 lbs (1,971 kg)
Filled Weight (Average Fill)3,386 lbs (1,536 kg)
Water Capacity (Spa Volume)	... 435 US gallons (1,647 Liters)
Water Capacity (Average Fill)	... 320 US gallons (1,211 Liters)
Electronic ControlsSolid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles
Pump 1North America (60 Hz): 2-Speed, 4.5 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz): 2-Speed, 2.0 HP continuous
Pump 2North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous
Circulation PumpNo
Total Jets37
Seat A2 SL Directional, 8 SLR Rotational, 1 SL3 Directional
Seat B1 SL3R Rotational
Seat C2 SL Directional, 6 SL3 Directional
Seat D2 SL3R Rotational
Seat E2 SL3 Directional, 1 SL5R Rotational
Seat F2 SL Directional, 4 SL3R Rotational
Footwell (G)4 SL Directional
Massage SelectorsNone
Air Controls2
Water Management SystemOne 50 ft ² filter cartridge on jets pump 1, ClearRay Active Oxygen® System Export (50 Hz): ClearRay® UV-C System
LED LightingLED Lighting System (Interior Surround); Standard Exterior Light
Cabinet ColorsSmoked, Charcoal
Acrylic ColorsPlatinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
Headrests4
WaterfallOne independent flow rate (on or off) adjustment; powered by the pump 1
Heater:North America (60 Hz): 5.5 kW, High Flow Export (50 Hz): High Flow, 2.7 kW
Electrical Requirements:North America (60 Hz): 240 VAC@40A, 50A or 60A Export (50 Hz): 220-240 VAC@1x16A, 1x32A or 2 out of 3-phase (see manual) or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.
Warranty*North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets
Special Features (Optional)SmartTub® Module
Audio System (Optional)N/A



Jacuzzi J-245

Operation/Seat Depths



37 Total Jets

Air Control 1:
Opens/Closes
Air Inlet to Jet
Group A

Waterfall Valve:
Adjust water flow
to the waterfall.

Air Control 2:
Opens/Closes
Air Inlet to Jet
Group B



SL3 Jets (10)



SL3R Jets (8)



SL5R Jet (1)

Spa Operation Subject to Change without Notice

Seat Depths

A = 25.88" (65.72 cm)

B = 20.63" (52.39 cm)

C = 26.75" (67.95 cm)

D = 21.63" (54.93 cm)

E = 24.63" (62.55 cm)

F = 18.25" (46.36 cm)

G = 23.38" (59.37 cm)

H = 17.13" (43.50 cm)

I = 30.00" (76.20 cm)

Listed dimensions


represent distance from
top of acrylic to lowest
point in seat. Tolerance
 $\pm 0.5"$ (1.27 cm).



Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-245


Dimensions

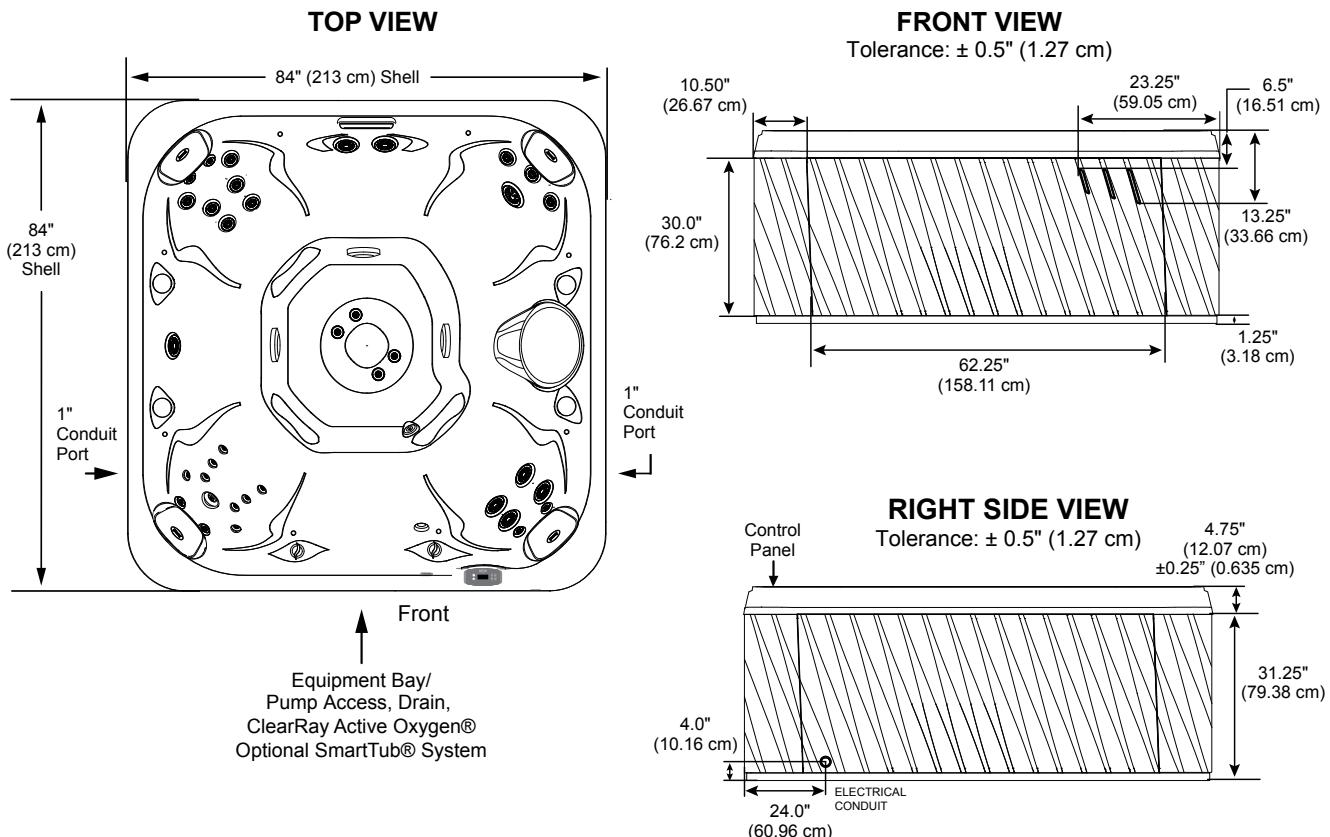

IMPORTANT! Always measure each hot tub
for exact dimensions BEFORE designing its
foundational support and/or decking.



Cabinet Radius:
 $\approx 10.0"$ (25.4 cm)

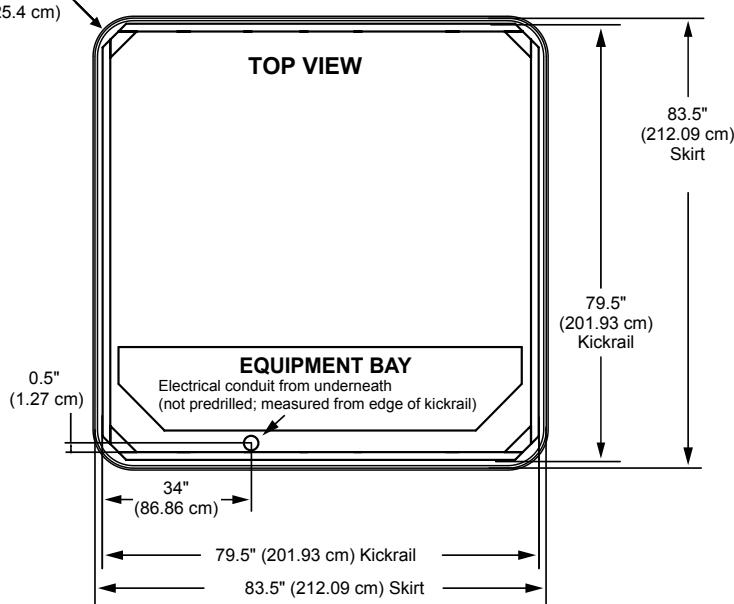


Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/specifications subject to change without notice. Tolerance $\pm 0.5"$ (1.27 cm)

Jacuzzi J-235

Specifications

Seating Capacity	6 Adults
Dimensions	84" x 84" x 36" (213 cm x 213 cm x 91 cm); For Complete Dimensions, See page 82
Dry Weight	726 lbs (329 kg)
Filled Weight (Spa Volume)	4,229 lbs (1,918 kg)
Filled Weight (Average Fill)	3,270 lbs (1,483 kg)
Water Capacity (Spa Volume)	420 US gallons (1,590 Liters)
Water Capacity (Average Fill)	305 US gallons (1,155 Liters)
Electronic Controls	Solid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles
Pump 1	North America (60 Hz): 2-Speed, 4.5 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz): 2-Speed, 2.0 HP continuous
Pump 2	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous
Circulation Pump	No
Total Jets	34
Seat A Jets	4 SL3R Rotational, 2 SL5R Rotational
Seat B Jets	2 SL3R Rotational
Seat C Jets	2 SLR Rotational, 2 SL Directional, 8 SL3 Directional
Seat D Jet	1 SL3R Rotational
Seat E Jets	2 SLR Rotational, 8 SL Directional, 1 SL3 Directional
Footwell (G)	2 SL3 Directional
Massage Selectors	None
Air Controls	2
Water Management System	One 50 ft ² filter cartridge on jets pump 1, ClearRay Active Oxygen® System Export (50 Hz): ClearRay® UV-C System
LED Lighting	LED Lighting System (Interior Surround); Standard Exterior Light
Cabinet Colors	Smoked, Charcoal
Acrylic Colors	Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
Headrests	3
Waterfall	One independent flow rate (on or off) adjustment; powered by the pump 1
Heater:	North America (60 Hz): 5.5 kW, High Flow Export (50 Hz): High Flow, 2.7 kW
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A or 60A Export (50 Hz): 220-240 VAC@1x16A, 1x32A or 2 out of 3-phase (see manual) or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.
Warranty*	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls; 1 Year Cabinet, 1 Year Jets Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets
Special Features (Optional)	SmartTub® Module
Audio System (Optional)	N/A

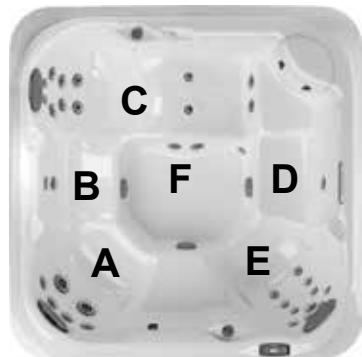

Jacuzzi J-235

Operation/Seat Depths



Group A Jets are
always on when
Pump 1 is running.

Group B Jets are
always on when
Pump 2 is running.

34 Total Jets



SL Jets (6)



SLR Jets (8)



SL3 Jets (11)



SL3R Jets (7)



SL5R Jets (2)

Spa Operation Subject to Change without Notice

Seat Depths

A = 23.25" (59.06 cm)

B = 20.75" (52.71 cm)

C = 24.88" (63.18 cm)

D = 25.50" (64.77 cm)

E = 17.50" (44.45 cm)

F = 21.50" (54.61 cm)


G = 25.63" (65.09 cm)

H = 17.00" (43.18 cm)

I = 30.00" (76.20 cm)

Listed dimensions

represent distance from
top of acrylic to lowest
point in seat. Tolerance
 $\pm 0.5"$ (1.27 cm).

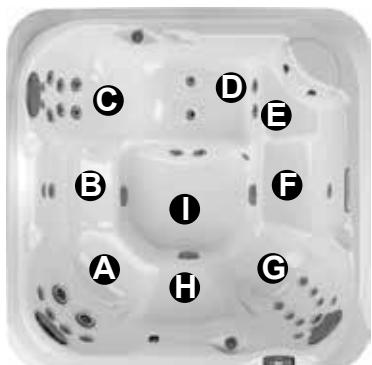


Dimensions/Specifications are Subject to Change Without Notice


Jacuzzi J-235

Dimensions


TOP VIEW

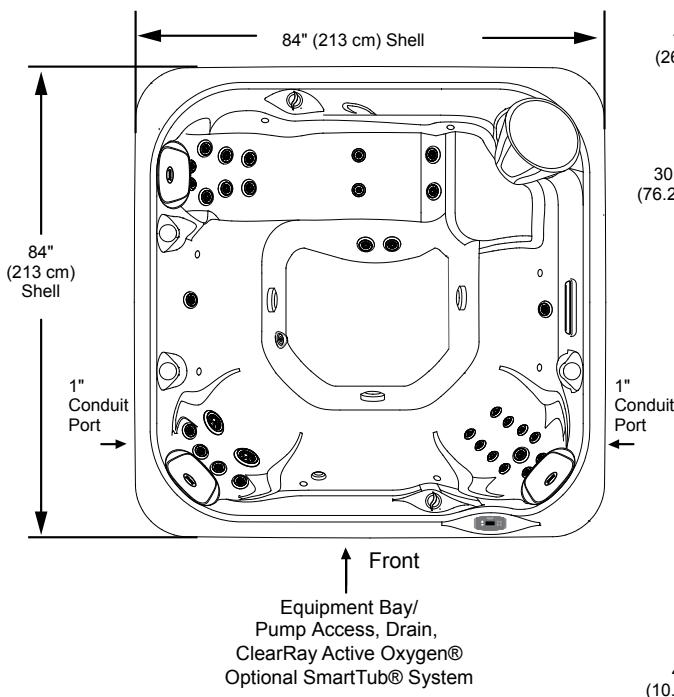

FRONT VIEW

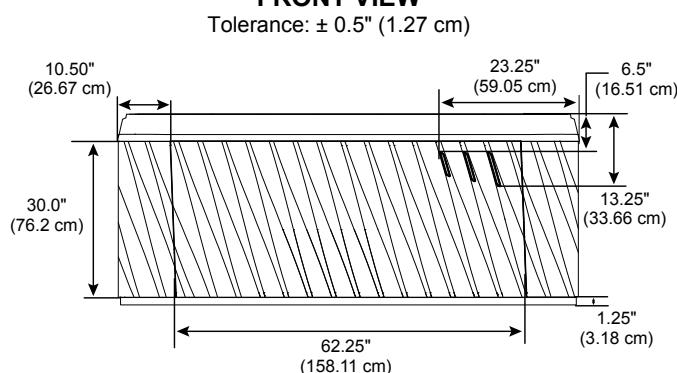

RIGHT SIDE VIEW

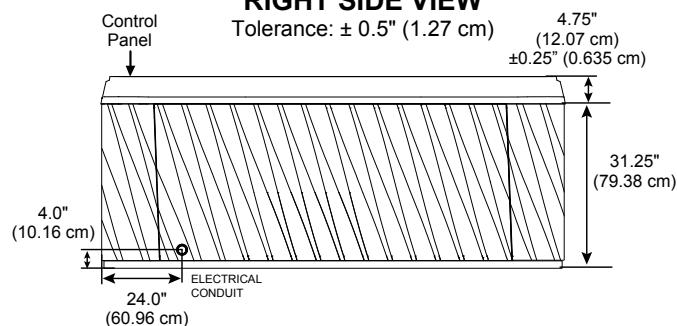


STOP

**IMPORTANT! Always measure each hot tub
for exact dimensions BEFORE designing its
foundational support and/or decking.**

STOP

Cabinet Radius:
≈ 10.0" (25.4 cm)

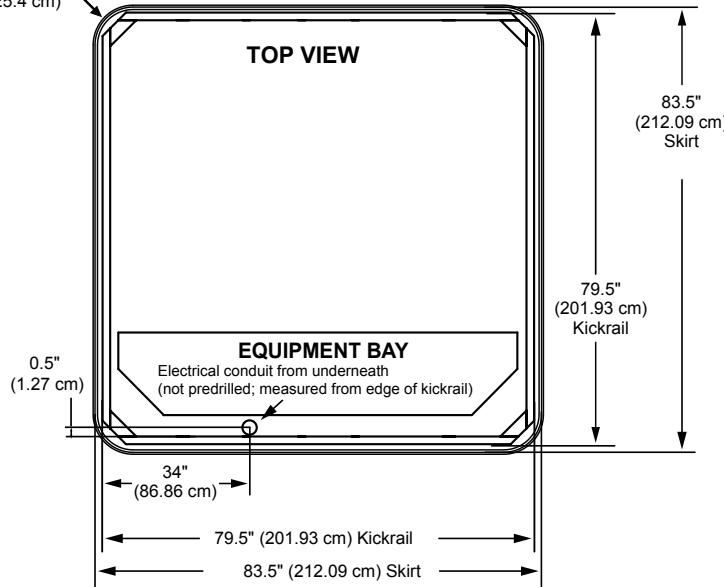

Dimensions/specifications subject to change without notice. Tolerance: ± 0.5" (1.27 cm)

Dimensions/specifications subject to change without notice. Tolerance ±0.5" (1.27 cm)

Jacuzzi J-225

Specifications

Seating Capacity	4-5 Adults
Dimensions	80" x 80" x 33" (203 cm x 203 cm x 84 cm); For Complete Dimensions, See page 82
Dry Weight	619 lbs (281 kg)
Filled Weight (Spa Volume)	3,805 lbs (1,726 kg)
Filled Weight (Average Fill)	2,954 lbs (1,340 kg)
Water Capacity (Spa Volume)	382 US gallons (1,446 Liters)
Water Capacity (Average Fill)	280 US gallons (1,060 Liters)
Electronic Controls	Solid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles
Pump 1	North America (60 Hz): 2-Speed, 2.5 HP brake, 1.5 HP continuous, 48 Frame Export (50 Hz): 2-Speed, 2.0 HP continuous
Circulation Pump	No
Total Jets	26
Seat A Jets	3 SL3 Directional, 1 SL5R Rotational
Seat B Jets	1 SLR Rotational, 1 SL3 Directional, 8 SL Directional
Seat C Jet	1 SL3R Rotational
Seat D Jets	6 SL3 Directional
Seat E Jets	4 SL3R Rotational
Massage Selectors	None
Air Controls	2
Water Management System	One 50 ft ² filter cartridge on jets pump 1, ClearRay Active Oxygen® System Export (50 Hz): ClearRay® UV-C System
LED Lighting	LED Lighting System (Interior Surround); Standard Exterior Light
Cabinet Colors	Smoked, Charcoal
Acrylic Colors	Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
Headrests	4
Heater:	North America (60 Hz): 120V 1kW or 240V 4.0 kW, High Flow
Export (50 Hz):	High Flow, 2.7 kW
Electrical Requirements:	North America (60 Hz): 120V@15A (GFCI cord) 240 VAC@30A or 40A Export (50 Hz): 220-240 VAC@1x16A, 1x32A or 2 out of 3-phase (see manual) or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.
Warranty*	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls; 1 Year Cabinet, 1 Year Jets Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets
Special Features (Optional)	SmartTub® Module
Audio System (Optional)	N/A



Jacuzzi J-225

Operation/Seat Depths



Jets are always on when the Jets Pump 1 is running.

Air Control 1:
Opens/Closes
Air Inlet to Jet
Group A

Air Control 2:
Opens/Closes
Air Inlet to Jet
Group B

26 Total Jets



SL Jets (8)



SLR Jets (2)



SL3 Jets (10)



SL3R Jets (5)



SL5R Jets (1)

Spa Operation Subject to Change without Notice

Seat Depths

A = 23.50" (59.69 cm)

F = 21.50" (54.61 cm)

Listed dimensions
represent distance from
top of acrylic to lowest
point in seat. Tolerance
 $\pm 0.5"$ (1.27 cm).

B = 21.00" (53.34 cm)

G = 26.00" (66.04 cm)

C = 27.25" (69.22 cm)

H = 17.50" (44.45 cm)

D = 21.88" (55.56 cm)

I = 28.00" (71.12 cm)

E = 23.88" (60.64 cm)




Dimensions/Specifications are Subject to Change Without Notice


Jacuzzi J-225

Dimensions


TOP VIEW

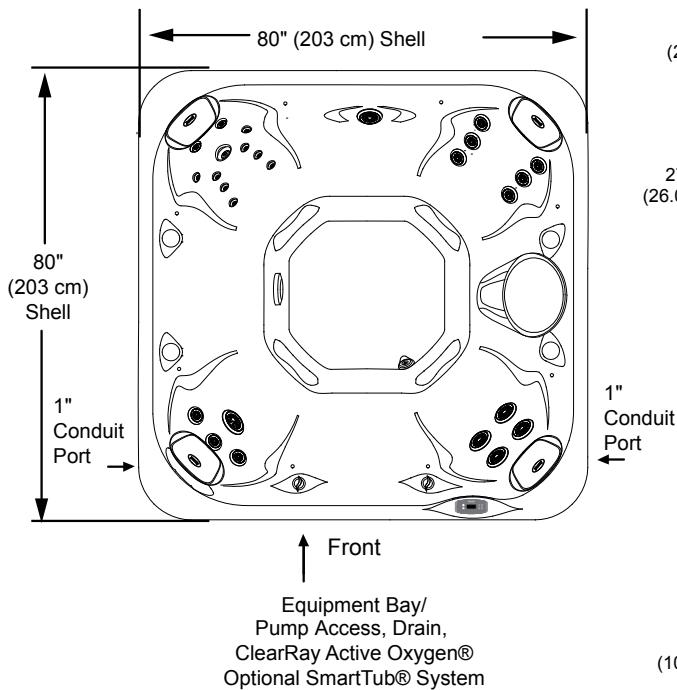

FRONT VIEW

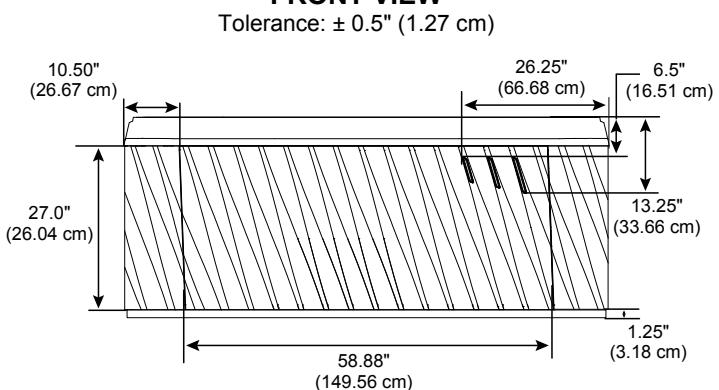

RIGHT SIDE VIEW

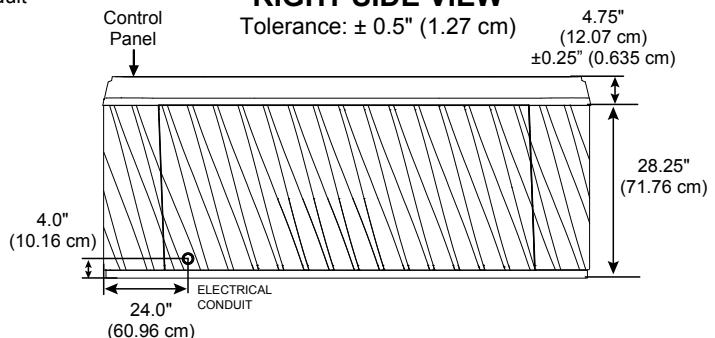


STOP

**IMPORTANT! Always measure each hot tub
for exact dimensions BEFORE designing its
foundational support and/or decking.**

STOP

Cabinet Radius:
 $\approx 10.0"$ (25.4 cm)

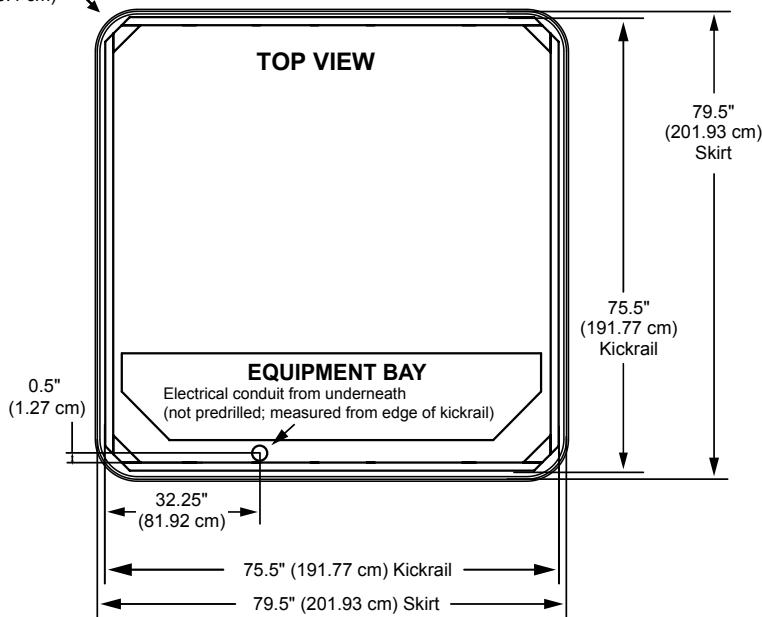


Dimensions/specifications subject to change without notice. Tolerance $\pm 0.5"$ (1.27 cm)

Jacuzzi J-215

Specifications

Seating Capacity	2-3 Adults
Dimensions	69" x 80" x 33" (175 cm x 203 cm x 84 cm); For Complete Dimensions, See page 82
Dry Weight	517 lbs (235 kg)
Filled Weight (Spa Volume)	2,936 lbs (1,332 kg)
Filled Weight (Average Fill)	2,251 lbs (1,021 kg)
Water Capacity (Spa Volume)	290 US gallons (1,098 Liters)
Water Capacity (Average Fill)	205 US gallons (776 Liters)
Electronic Controls	Solid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles
Pump 1	North America (60 Hz): 2-Speed, 2.5 HP brake, 1.5 HP continuous, 48 Frame Export (50 Hz): 2-Speed, 2.0 HP continuous on the completes
Circulation Pump	No
Total Jets	21
Seat A Jets	6 SLR Rotational
Seat B Jets	1 SLR Rotational, 8 SL Directional
Seat C Jets	4 SL3R Rotational
Footwell (D) Jets	2 SLR Rotational
Massage Selectors	None
Air Controls	1
Water Management System	One 50 ft ² filter cartridge on jets pump 1, ClearRay Active Oxygen® System Export (50 Hz): ClearRay® UV-C System
LED Lighting	LED Lighting System (Interior Surround); Standard Exterior Light
Cabinet Colors	Smoked, Charcoal
Acrylic Colors	Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
Headrests	3
Heater:	North America (60 Hz): 120V 1kW or 240V 4.0 kW, High Flow
Export (50 Hz):	High Flow, 2.7 kW
Electrical Requirements:	North America (60 Hz): 120V@15A (GFCI cord) 240 VAC@30A or 40A Export (50 Hz): 220-240 VAC@1x16A, 1x32A or 2 out of 3-phase (see manual) or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.
Warranty*	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls; 1 Year Cabinet, 1 Year Jets Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets
Special Features (Optional)	SmartTub® Module
Audio System (Optional)	N/A

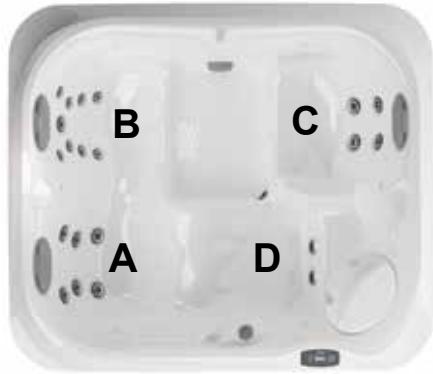

Jacuzzi J-215

Operation/Seat Depths



Air Control 1:
Opens/Closes
Air Inlet to Jets A

Jets are always on
when the Jets Pump 1
is running.

21 Total Jets



SL Jets (8)



SLR Jets (9)



SL3R Jets (4)

Spa Operation Subject to Change without Notice

Seat Depths

A = 25.13" (63.82 cm)

D = 18.00" (45.72 cm)


Listed dimensions
represent distance from
top of acrylic to lowest
point in seat. Tolerance
 $\pm 0.5"$ (1.27 cm).

B = 26.00" (66.04 cm)

E = 25.75" (65.41 cm)

C = 23.50" (59.69 cm)

F = 27.63" (70.17 cm)

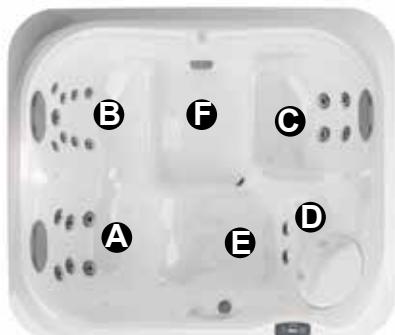


Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-215


Dimensions

TOP VIEW

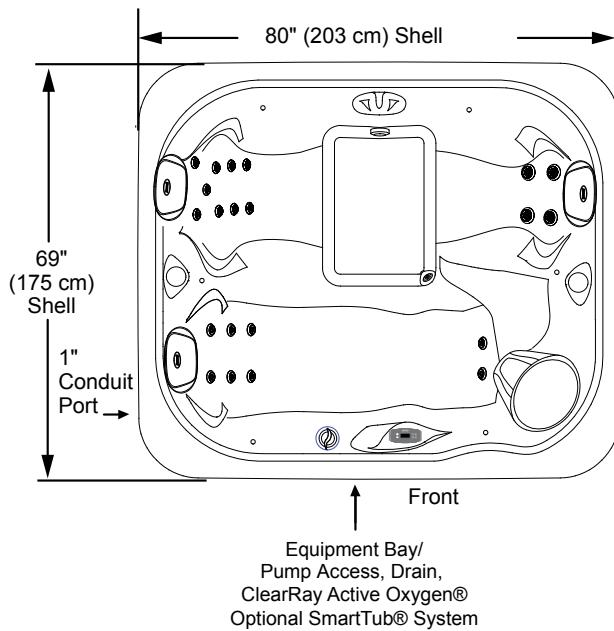


FRONT VIEW

Tolerance: $\pm 0.5"$ (1.27 cm)

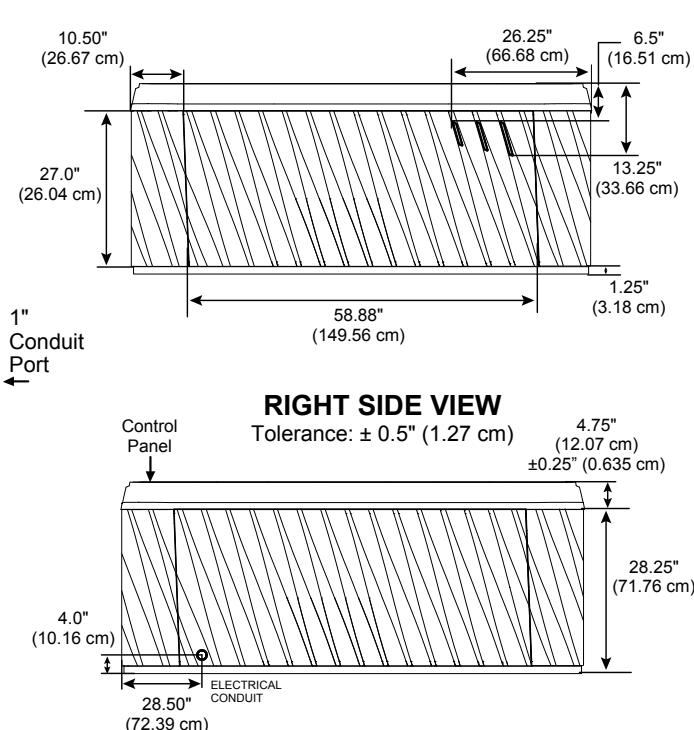

IMPORTANT! Always measure each hot tub
for exact dimensions BEFORE designing its
foundational support and/or decking.

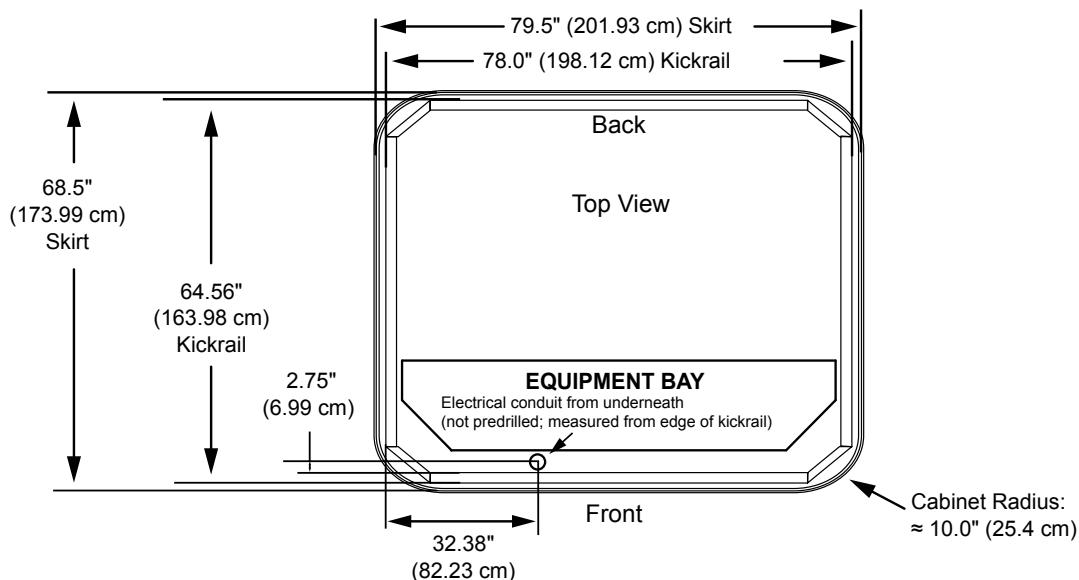


Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/specifications subject to change without notice. Tolerance $\pm 0.5"$ (1.27 cm)

Soul 30™ Jets


Specifications

Seating Capacity	6 Adults
Dimensions	78" x 78" x 36" (198 cm x 198 cm x 91 cm);
Filled Weight (Spa Volume)	3,864 lbs (1,753 kg)
Filled Weight (Average Fill)	2,971 lbs (1,348 kg)
Water Capacity (Spa Volume)	417 US gallons (1,579 Liters)
Water Capacity (Average Fill)	310 US gallons (1,173 Liters)
Electronic Controls	Digital Touch Controller. Offers customizing of cleaning cycles and water temperature setting.
Pump 1	North America (60 Hz): 2-Speed, 2.0 HPR Export (50 Hz): 2 kW, 2-Speed
Pump 2	N/A Export (50 Hz): N/A
Circulation Pump	N/A
Total Jets	30
Seat A Jets	6 DirectionalMax1, 6 DirectionalMax2
Seat B Jets	1 DirectionalMax1
Seat C Jets	6 DirectionalMax2
Seat D Jets	2 DirectionalMax1
Seat E Jets	4 DirectionalMax1, 2 DirectionalMax2
Seat F Jets	1 DirectionalMax1
Footwell (G)	2 DirectionalMax1
Massage Selectors	N/A
Air Controls	2
Water Management System	One Easy Kleen 30 ft ² filter cartridge; Optional factory installed Ozone Export (50 Hz): Optional factory installed Ozone
LED Lighting	Multicolor Waterfall light; Footwell light, Exterior corner lights (8 qty)
Shell/Cabinet Colors	Mystic Sparkle, Tuscan Sparkle, Night Sparkle, Glacier Sparkle
Headrests	3
Waterfalls	One with independent flow rate (on or off) adjustment; powered by pump 1
Heater:	Hi Flow 1.0kW/4kW Export (50 Hz): Hi Flow 3.0kW
Electrical Requirements:	North America (60 Hz): Convertible 120 VAC@15A or 240 VAC@30A, 40A Export (50 Hz): 220-240V@1x16A, 1X32A
Warranty*	North America (60 Hz): 5 Years Shell, 1 Year Plumbing Components, 1 Year Electrical Components, 1 Year Insulating Cover, 1 Year Labor; Export (50 Hz): 5 Years Shell, 2 Years Plumbing Components, 2 Years Electrical Components, 2 Years Insulating Cover, 2 Years Labor;
Special Features	Optional Suite Package Add-On

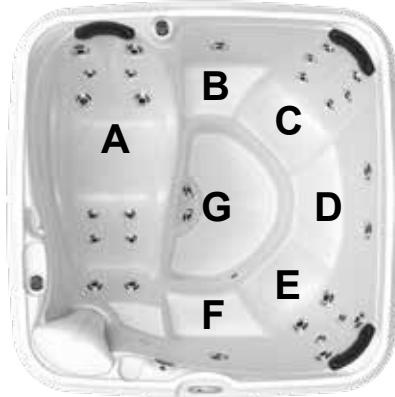

Soul 30 Jets

Operation/Seat Depths

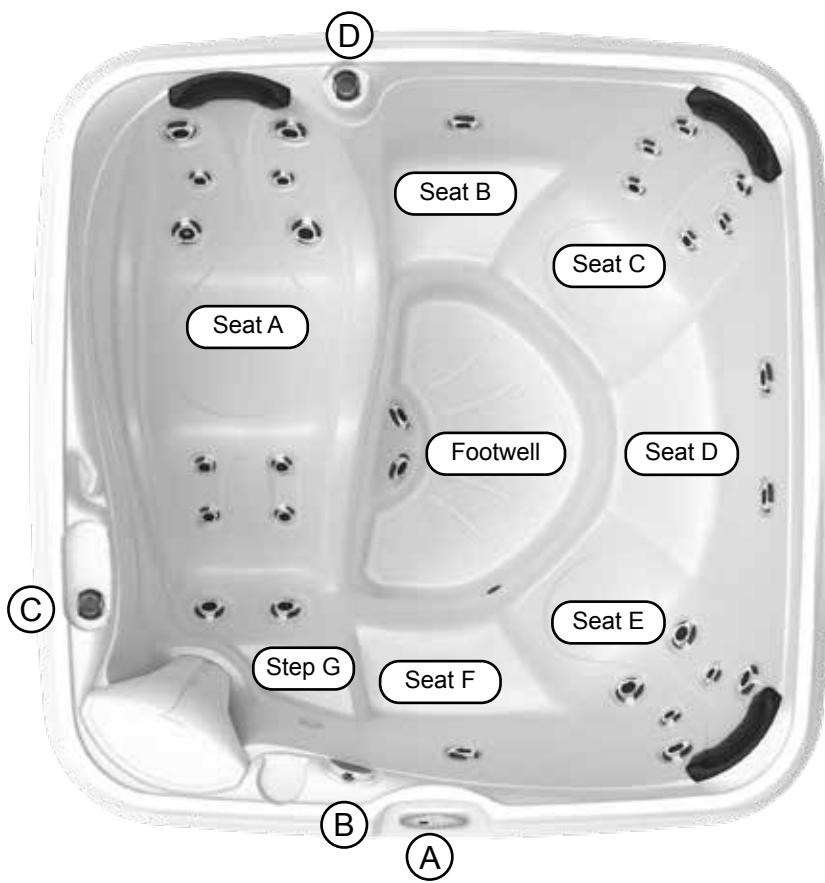

30 Total Jets

DirectionalMax1
Jets (16)

DirectionalMax2
Jets (14)



Spa Operation Subject to Change without Notice

A = 25.75" (65.40 cm)

B = 24.50" (62.23 cm)

C = 28.00" (71.12 cm)

D = 24.75" (62.86 cm)

E = 26.50" (67.30 cm)

F = 23.25" (59.06 cm)

G = 19.00" (48.26 cm)

H = 34.50" (87.63 cm)

Seat Depths


Listed dimensions represent distance from top of spa to lowest point in seat.
Tolerance: $\pm 0.5"$ (1.27 cm)






Dimensions/Specifications are Subject to Change Without Notice

Soul 30 Jets

Dimensions

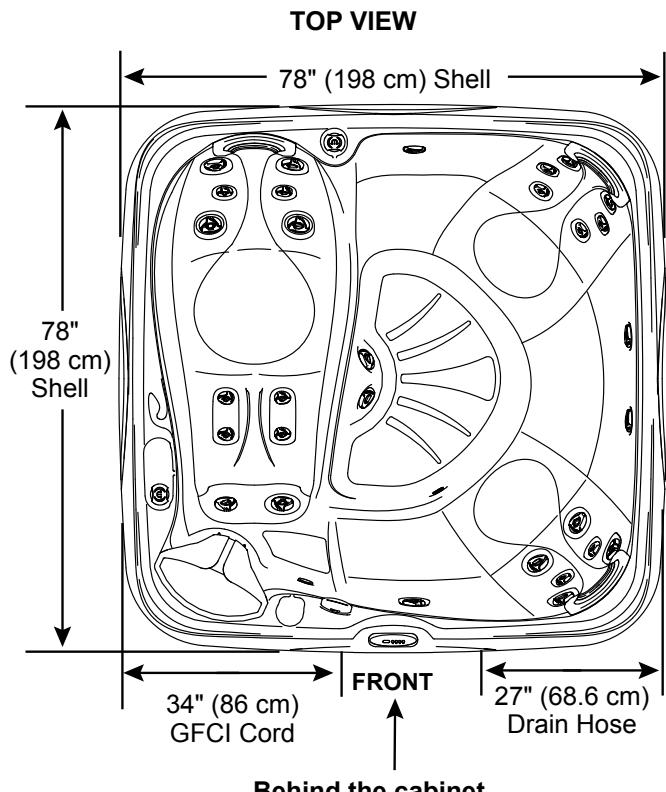

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

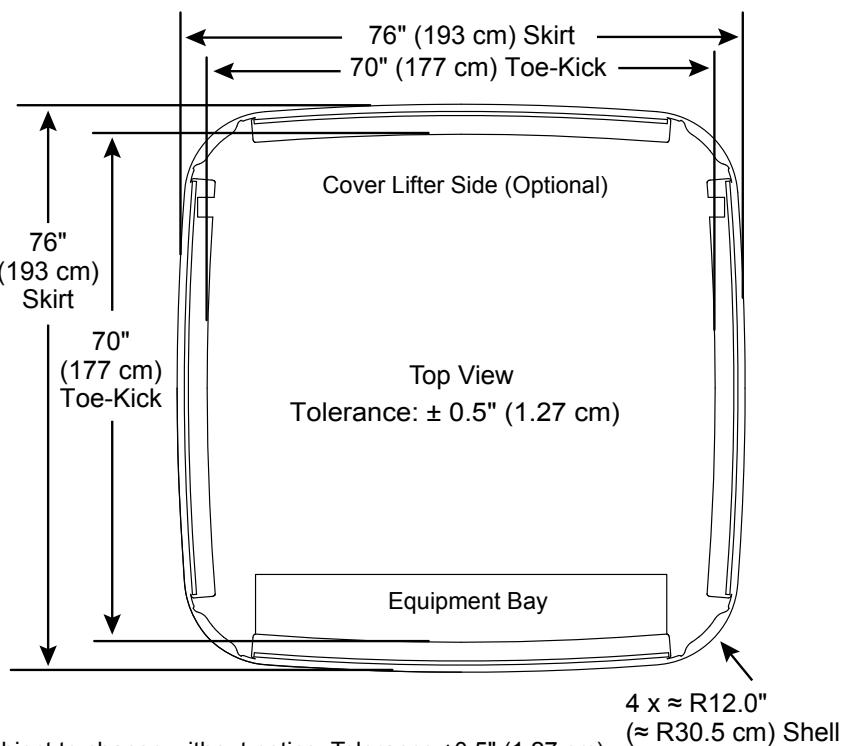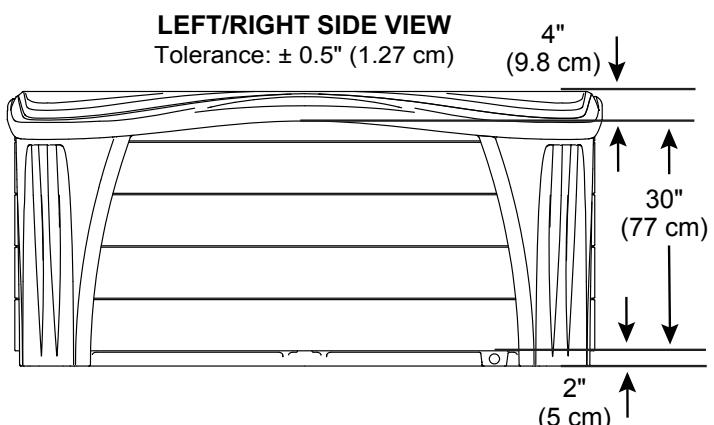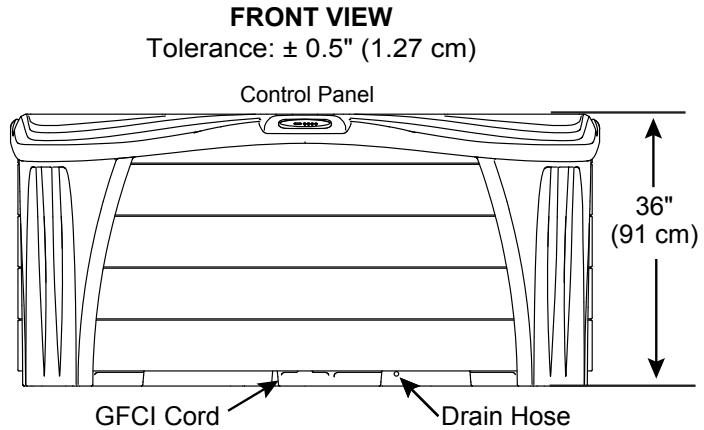


Dimensions/specifications subject to change without notice. Tolerance $\pm 0.5"$ (1.27 cm)

Echo 30™ Jets


Specifications

Seating Capacity	7 Adults
Dimensions	78" x 78" x 36" (198 cm x 198 cm x 91 cm);
Dry Weight	414 lbs (187 kg)
Filled Weight (Spa Volume)	4,117 lbs (1,867 kg)
Filled Weight (Average Fill)	3,150 lbs (1,429 kg)
Water Capacity (Spa Volume)	444 US gallons (1,681 Liters)
Water Capacity (Average Fill)	328 US gallons (1,242 Liters)
Electronic Controls	Digital Touch Controller. Offers customizing of cleaning cycles and water temperature setting.
Pump 1	North America (60 Hz): 2-Speed, 2.0 HPR Export (50 Hz): 2 kW, 2-Speed
Pump 2	N/A Export (50 Hz): N/A
Circulation Pump	N/A
Total Jets	30
Seat A Jets	4 DirectionalMax1 Jets, 2 DirectionalMax2 Jets
Seat B Jets	2 DirectionalMax1 Jets
Seat C Jets	8 DirectionalMax2 Jets
Seat D Jets	6 DirectionalMax2 Jets
Seat E Jets	2 DirectionalMax1 Jets
Seat F Jets	4 DirectionalMax1 Jets, 2 DirectionalMax2 Jets
Massage Selectors	N/A
Air Controls	2
Water Management System	One Easy Kleen 30 ft ² filter cartridge; Optional factory installed Ozone Export (50 Hz): Optional factory installed Ozone
LED Lighting	Multicolor waterfall light; Exterior corner light (white color only)
Shell/Cabinet Colors	Mystic Sparkle, Tuscan Sparkle, Night Sparkle, Glacier Sparkle
Headrests	4
Waterfalls	One with independent flow rate (on or off) adjustment; powered by pump 1
Heater:	Hi Flow 1.0kW/4kW Export (50 Hz): Hi Flow 3.0kW
Electrical Requirements:	North America (60 Hz): Convertible 120 VAC@15A Export (50 Hz): 220-240V@1x16A, 1X32A
Warranty*	North America (60 Hz): 5 Years Shell, 1 Year Plumbing Components, 1 Year Electrical Components, 1 Year Insulating Cover, 1 Year Labor; Export (50 Hz): 5 Years Shell, 2 Years Plumbing Components, 2 Years Electrical Components, 2 Years Insulating Cover, 2 Years Labor;
Special Features	N/A

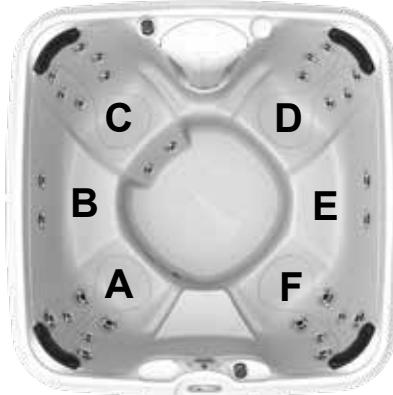

Echo 30 Jets

Operation/Seat Depths

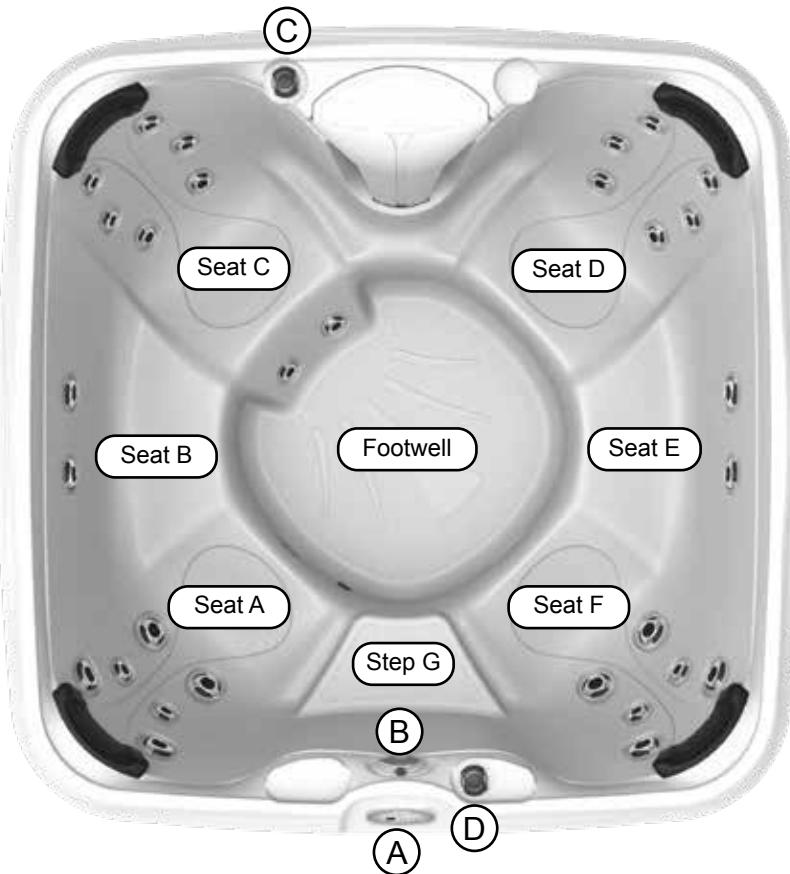

30 Total Jets

DirectionalMax1
Jets (12)

DirectionalMax2
Jets (18)



Spa Operation Subject to Change without Notice

A = 26.50" (67.30 cm)

B = 24.75" (62.86 cm)

C = 28.00" (71.12 cm)

D = 28.00" (71.12 cm)

E = 24.75" (62.86 cm)

F = 26.50" (67.30 cm)

G = 20.00" (50.80 cm)

H = 34.50" (87.63 cm)

Seat Depths

Listed dimensions represent distance from top of spa to lowest point in seat.




Tolerance: $\pm 0.5"$ (1.27 cm)




Dimensions/Specifications are Subject to Change Without Notice

Echo 30 Jets

Dimensions

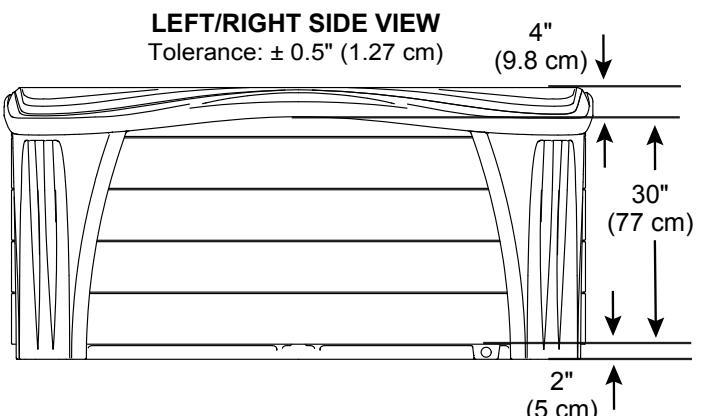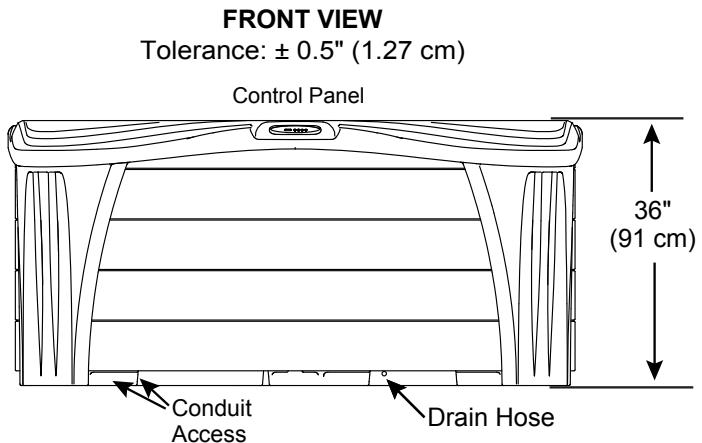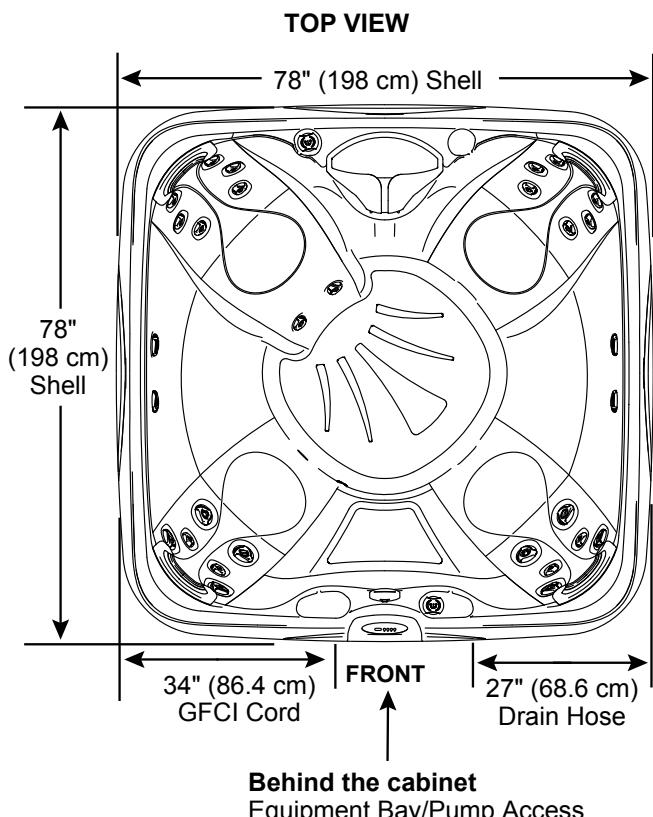

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

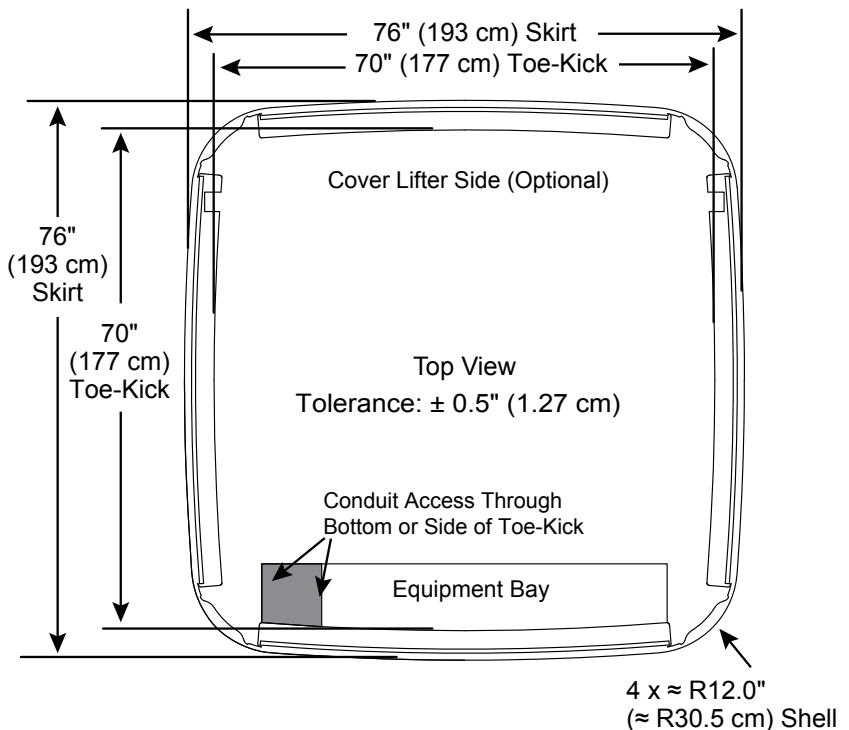


Dimensions/specifications subject to change without notice. Tolerance $\pm 0.5"$ (1.27 cm)

Mood 20™ Jets


Specifications

Seating Capacity	5 Adults
Dimensions	78" x 68" x 32" (198 cm x 173 cm x 81 cm);
Dry Weight	285 lbs (129 kg)
Filled Weight (Spa Volume)	3,120 lbs (1,415 kg)
Filled Weight (Average Fill)	2,404 lbs (1,090 kg)
Water Capacity (Spa Volume)	340 US gallons (1,287 Liters)
Water Capacity (Average Fill)	254 US gallons (961 Liters)
Electronic Controls	Digital Touch Controller. Offers customizing of cleaning cycles and water temperature setting.
Pump 1	North America (60 Hz): 2-Speed, 2.0 HPR Export (50 Hz): 2-Speed, 1.5 HPR
Pump 2	N/A Export (50 Hz): N/A
Circulation Pump	N/A
Total Jets	20
Seat A Jets	1 DirectionalMax1, 1 DirectionalMax2
Seat B Jets	2 DirectionalMax1
Seat C Jets	1 DirectionalMax1, 1 DirectionalMax2
Seat D Jets	2 DirectionalMax1, 2 DirectionalMax2, 2 DirectMiniMax
Seat E Jets	2 DirectionalMax1, 2 DirectionalMax2, 2 DirectMiniMax
Footwell (F) Jets	2 DirectionalMax1
Massage Selectors	N/A
Air Controls	2
Water Management System	One Easy Kleen 30 ft ² filter cartridge; Optional factory installed Ozone Export (50 Hz): Optional factory installed Ozone
LED Lighting	Multicolor Waterfall light; Footwell light, Exterior corner lights (8 qty)
Shell/Cabinet Colors	Mystic Sparkle, Tuscan Sparkle, Night Sparkle, Glacier Sparkle
Headrests	2
Waterfalls	One with independent flow rate (on or off) adjustment; powered by pump 1
Heater:	Hi Flow 1.0kW/4kW Export (50 Hz): Hi Flow 3.0kW
Electrical Requirements:	North America (60 Hz): Convertible 120 VAC@15A or 240 VAC@30A, 40A Export (50 Hz): 220-240V@1x16A, 1X32A
Warranty*	North America (60 Hz): 5 Years Shell, 1 Year Plumbing Components, 1 Year Electrical Components, 1 Year Insulating Cover, 1 Year Labor; Export (50 Hz): 5 Years Shell, 2 Years Plumbing Components, 2 Years Electrical Components, 2 Years Insulating Cover, 2 Years Labor;
Special Features	Optional Suite Package Add-On

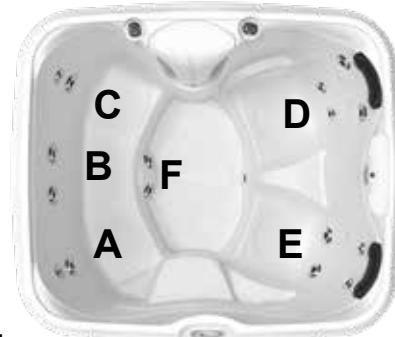

Mood 20 Jets

Operation/Seat Depths

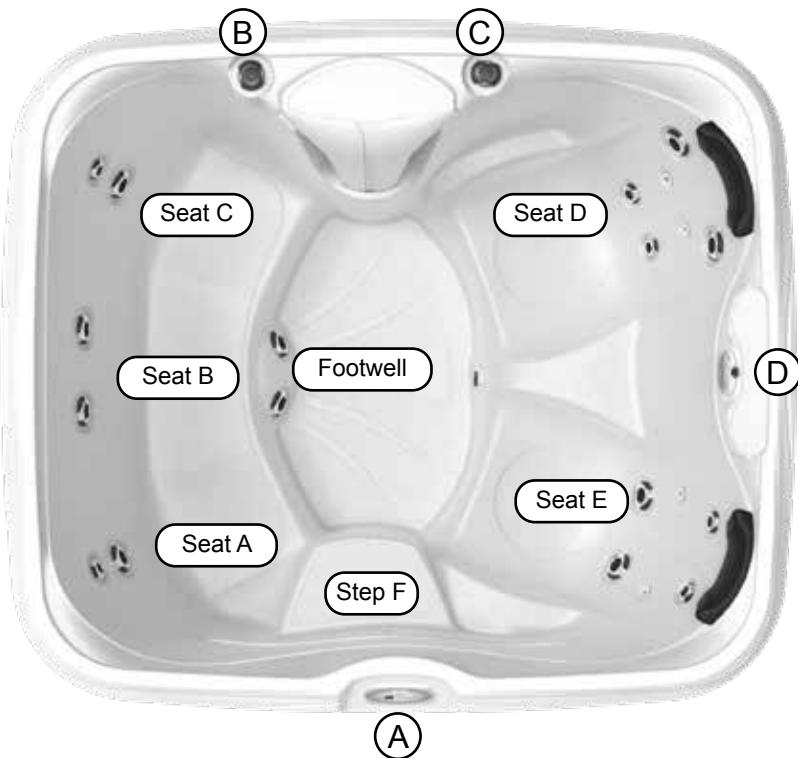

- (A) Topside Control - Activate Jets Pump, Light and Control Water Temperature
- (B) Air Control - Activates Seat A Jets (1 DirectionalMax1 Jet, 1 DirectionalMax2 Jet), Seat B Jets (2 DirectionalMax1 Jets), Seat C Jets (1 DirectionalMax1 Jet, 1 DirectionalMax2 Jet), Footwell Jets (2 DirectionalMax2 Jets)
- (C) Air Control - Activates Seat D Jets (2 DirectionalMax1 Jets, 2 DirectionalMax2 Jets, 2 DirectMiniMax Jets), Seat E Jets (2 DirectionalMax1 Jets, 2 DirectionalMax2 Jets, 2 DirectMiniMax Jets)
- (D) Water Feature Control - Controls Water Feature Output.

- Jet Pump 1: All seats and footwell jets

20 Total Jets

DirectionalMax1 Jets (10)	DirectionalMax2 Jets (6)	DirectMiniMax Jets (4)
------------------------------	-----------------------------	---------------------------



Spa Operation Subject to Change without Notice

A = 26.50" (67.31 cm)
B = 26.25" (66.68 cm)
C = 26.50" (67.31 cm)
D = 26.25" (66.68 cm)
E = 28.30" (71.87 cm)
F = 18.00" (45.72 cm)
G = 30.50" (77.47 cm)

Seat Depths




Listed dimensions represent distance from top of spa to lowest point in seat.
Tolerance: $\pm 0.5"$ (1.27 cm)




Dimensions/Specifications are Subject to Change Without Notice

Mood 20 Jets

Dimensions

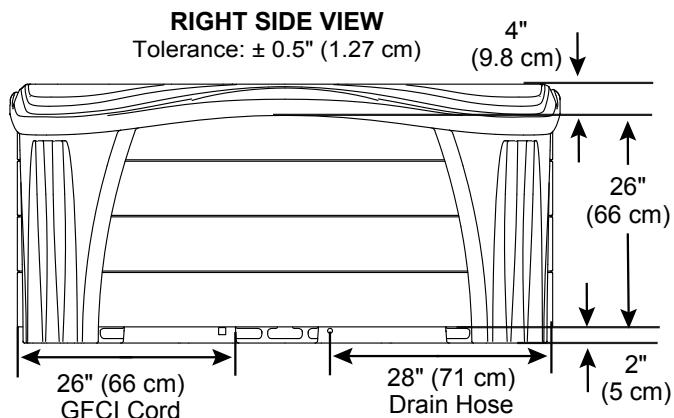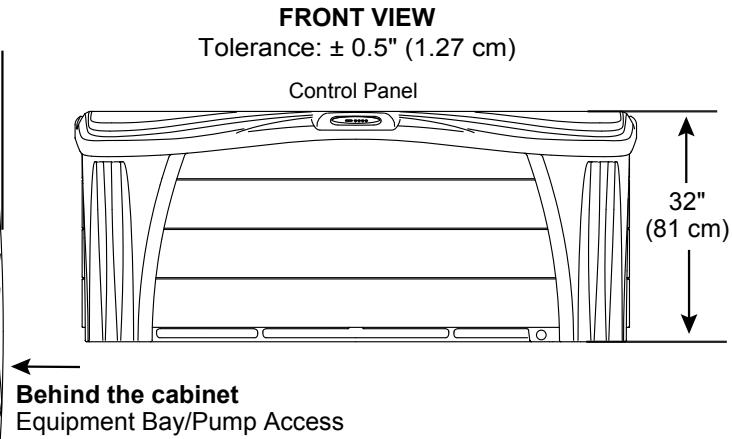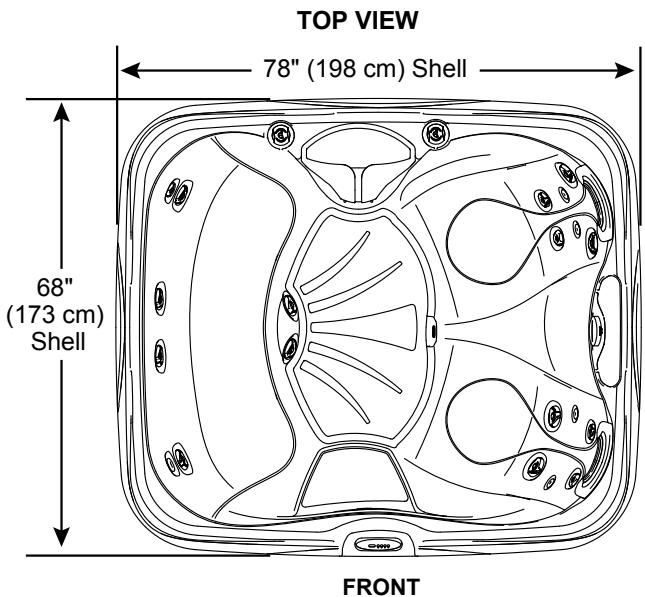

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

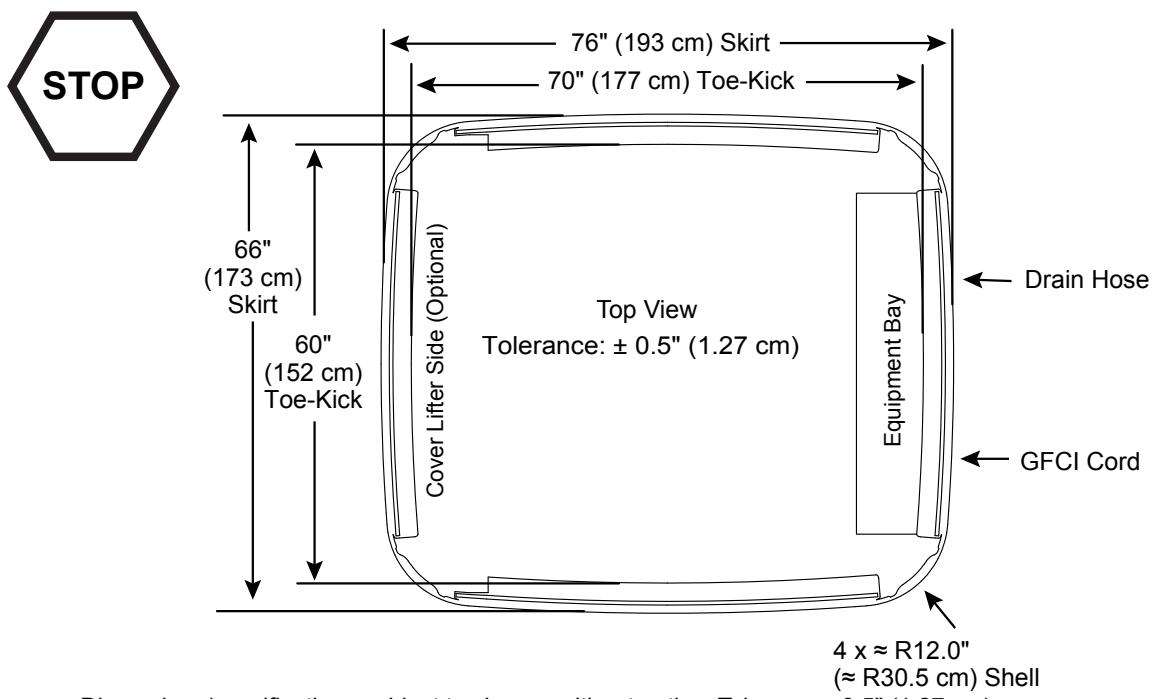

Dimensions/specifications subject to change without notice. Tolerance $\pm 0.5"$ (1.27 cm)


Complete Dimensions- J400 Collection Models

Spa Models	DIMENSIONS A-F (All measurements are an approximate $\pm .5"$)					
	A	B	C	D	E	F
J-495	110" (279.40 cm)					
J-485		91" (231 cm)	74.56" (189.38 cm)			
J-475				37.50" (95.25 cm)	43.50" (110.49 cm)	$\approx 8.0"$ (20.32 cm)
J-445						
J-435	84" (213.5 cm)	84" (213.5 cm)	66.56" (169.06 cm)			
Spa Models	DIMENSIONS G (All measurements are an approximate $\pm .5"$)					
	G	H (Drain)	CLEARRAY®			
J-495						
J-485						
J-475	$\approx 15.0"$ (38.10 cm)	Front Right	Front Center			
J-445						
J-435						




IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.


Spa Top View (J-485 Illustrated)

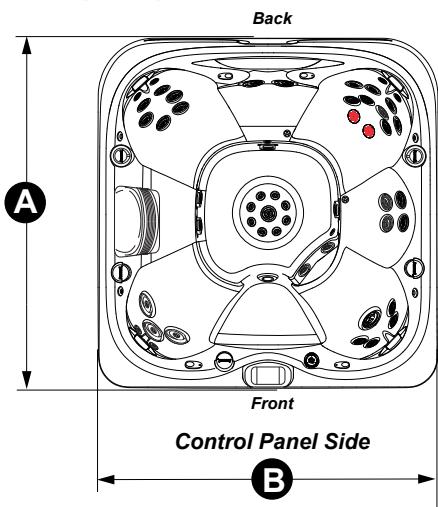


Control Panel Side View

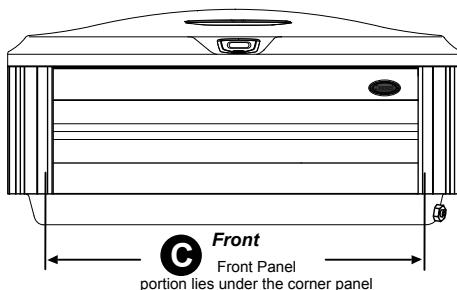

Spa Bottom View (J-485 Illustrated)

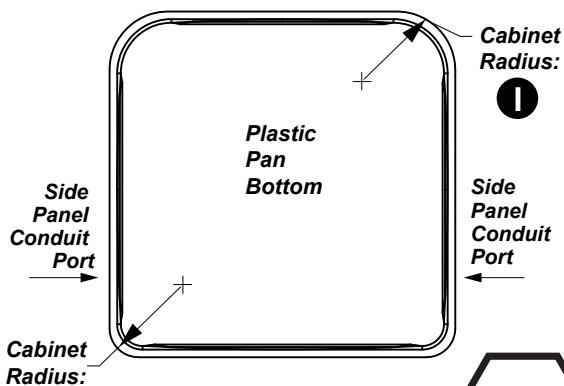

**Side View (J-485 Illustrated)
Left/Right Side Panel**

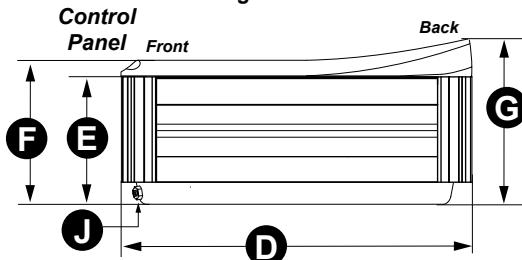

Important Panel Details

NOTE: Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.



Note: Gaps in underlying wood frame are for ventilation purposes; not for electrical hook-ups or other uses.

Complete Dimensions - J-LX Collection Models


Spa Models	DIMENSIONS A-F (All measurements are an approximate)						
	A	B	C	D	E	F	
J-LXL	91" (231.0 cm)	91" (231.0 cm)	31.50" (80.0 cm)	34" (86.0 cm)	Front Right	84.25" (214.0 cm)	
J-LX	84.25" (214.0 cm)	DIMENSIONS G-J (All measurements are an approximate)					
G							
J-LXL							
J-LX							




IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundation support and/or decking.

- Dimensions Subject to Change Without Notice -


Spa Top View (J-LXL Illustrated)

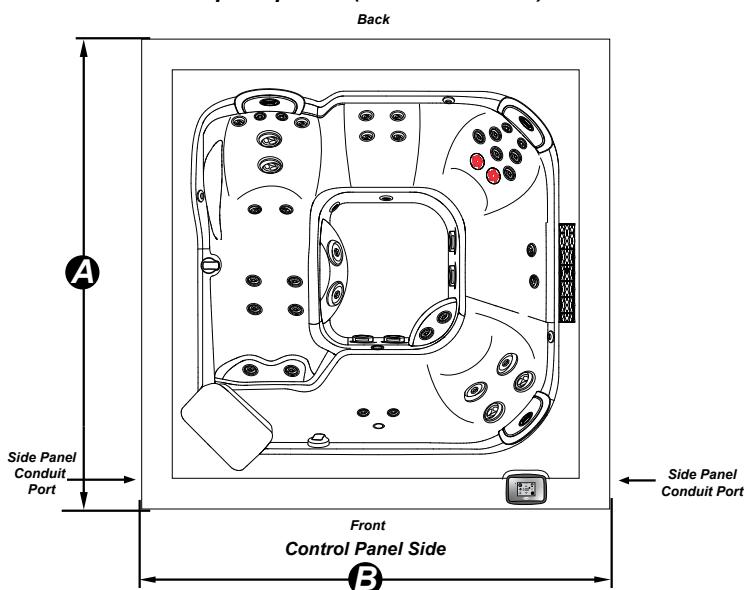


Control Panel Side View

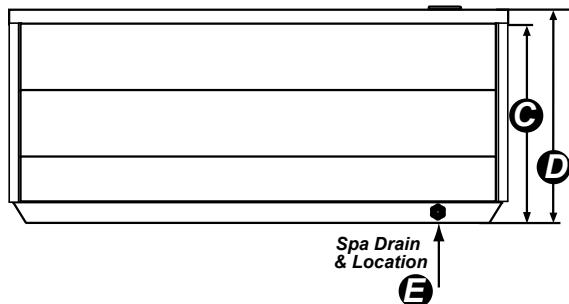

Front/Rear Side View (All Models)

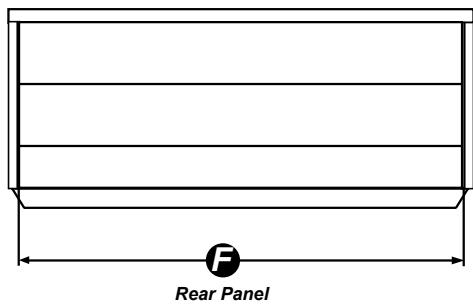

Left/Right Side View (All Models)

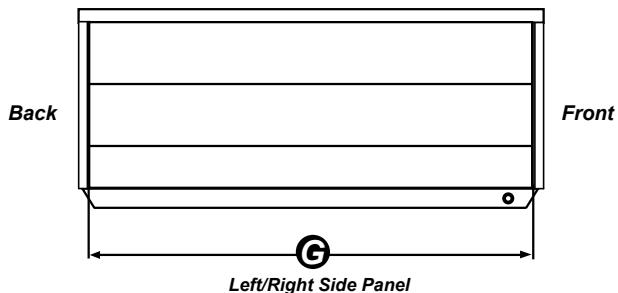


Note: Gaps in underlying wood frame are for ventilation purposes; not for electrical hook-ups or other uses.

Complete Dimensions - J300 Collection Models


Spa Models	DIMENSIONS A-F (All measurements are an approximate)					
	A	B	C	D	E	F
J-385	91" (231.1 cm)		66.75" (169.55 cm)			
J-375		91" (231.1 cm)			15.75" (40.01 cm)	32" (81.28 cm)
J-365			66.50" (168.91 cm)			
J-355						
J-345	84" (213.4 cm)	84" (213.4 cm)	60.0" (152.40 cm)		13.5" (34.09 cm)	30.50" (77.47 cm)
J-335						
J-325			52.5" (133.35 cm)		10.75" (27.31 cm)	28" (71.12 cm)
J-315	66" (167.6 cm)	76" (193 cm)	52.0" (132.08 cm)		9.50" (24.13 cm)	26.25" (66.68 cm)
DIMENSIONS G-I (All measurements are an approximate)						
G	H	I	CLEARRAY®	Front Center		IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundation support and/or decking.
J-385			12" (30.48 cm)			
J-375	37.50" (95.25 cm)	26" (66.04 cm)	29" (73.66 cm)			
J-365						
J-355						
J-345	36" (91.44 cm)	24.50" (62.23 cm)	27" (68.58 cm)			
J-335	33.50" (85.09 cm)	21.5" (54.61 cm)	12" (30.48 cm)			
J-325	31.75" (80.65 cm)					
J-315						

- Dimensions Subject to Change Without Notice -


Spa Top View (J-385 Illustrated)

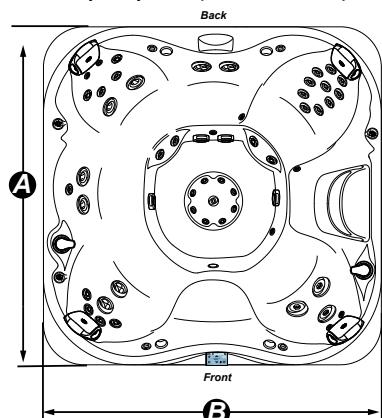


Control Panel Side View (All Models)

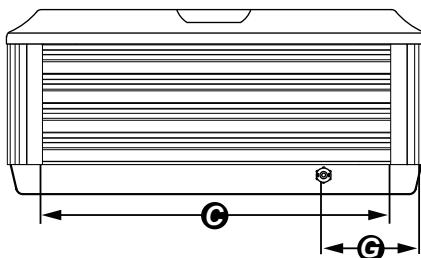

Rear Side View (All Models)

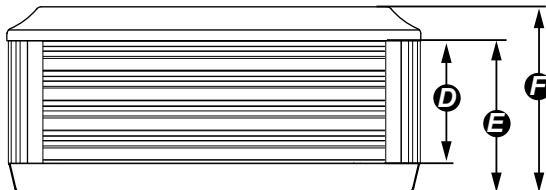

All Models Cabinet Radius:
≈ 11.0" (27.94 cm),
4-Corners

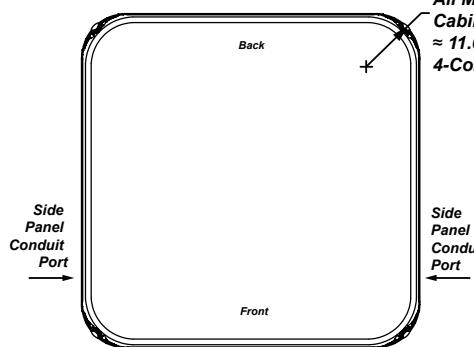


Note: Gaps in underlying wood frame are for ventilation purposes; not for electrical hook-ups or other uses.



Complete Dimensions-All J200 Collection Models

Spa Models	DIMENSIONS A-G (ALL MEASUREMENTS ARE AN APPROXIMATE)						
	A	B	C	D	E	F	G
J-215	69" (175.3 cm)	80" (203.2 cm)	58.88" (149.6 cm)	27" (68.6 cm)	33" (83.8 cm)	TBD	10.0" (25.4 cm)
J-225	80" (203.2 cm)	80" (203.2 cm)	58.88" (149.6 cm)	27" (68.6 cm)	33" (83.8 cm)	58.88" (149.6 cm)	10.0" (25.4 cm)
J-235	84" (213.4 cm)	84" (213.4 cm)	62.25" (158.1 cm)	30" (76.2 cm)	36.0" (91.4 cm)	62.25" (158.1 cm)	10.0" (25.4 cm)
J-245	84" (213.4 cm)	84" (213.4 cm)	62.25" (158.1 cm)	30" (76.2 cm)	36.0" (91.4 cm)	62.25" (158.1 cm)	10.0" (25.4 cm)
J-275	89" (226.1 cm)	89" (226.1 cm)	69.25" (175.9 cm)	30" (76.2 cm)	36.0" (91.4 cm)	69.25" (175.9 cm)	10.0" (25.4 cm)
J-285	89" (226.1 cm)	89" (226.1 cm)	69.25" (175.9 cm)	30" (76.2 cm)	36.0" (91.4 cm)	69.25" (175.9 cm)	10.0" (25.4 cm)
DIMENSIONS H-I (ALL MEASUREMENTS ARE AN APPROXIMATE)							
H	I	CLEARRAY®	Drain				
J-215	28.5" (72.39 cm)	4.0" (10.16 cm)	Center	Right	IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundation support and/or decking.		
J-225	24.0" (60.96 cm)	4.0" (10.16 cm)			IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundation support and/or decking.		
J-235	24.0" (60.96 cm)	4.0" (10.16 cm)			IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundation support and/or decking.		
J-245	24.0" (60.96 cm)	4.0" (10.16 cm)			IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundation support and/or decking.		
J-275	26.0" (66.04 cm)	4.0" (10.16 cm)			IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundation support and/or decking.		
J-285	26.0" (66.04 cm)	4.0" (10.16 cm)			IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundation support and/or decking.		
- Dimensions Subject to Change Without Notice -							

Spa Top View (J-285 Illustrated)

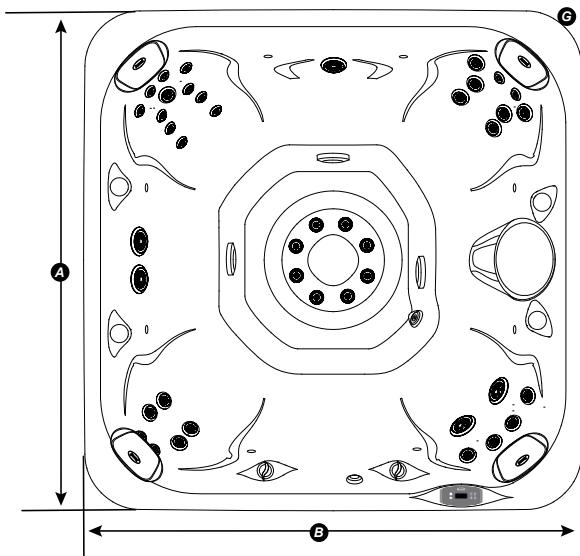

Cabinet Radius:
≈ 10.0" (25.4 cm),
4-Corners

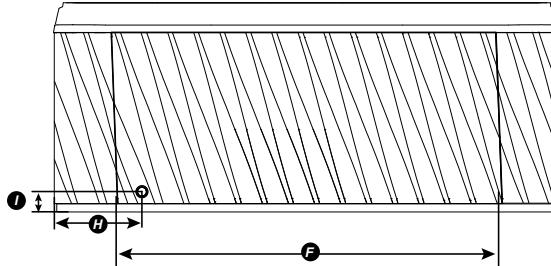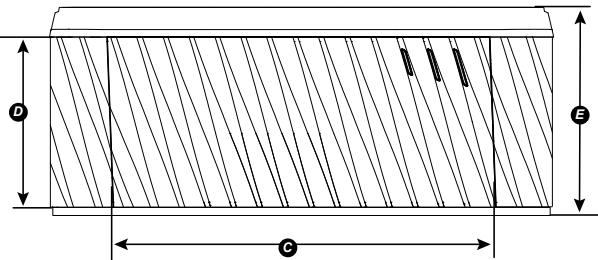

Note: Gaps in underlying wood frame are for ventilation purposes; not for electrical hook-ups or other uses.

Your Jacuzzi Hot Tub Dealer is:

